

**U.S. Department of the Interior
U.S. Geological Survey**

Estimates of Ground-Water Recharge, Base Flow, and Stream Reach Gains and Losses in the Willamette River Basin, Oregon

By KARL K. LEE AND JOHN C. RISLEY

Water-Resources Investigations Report 01–4215

**Prepared in cooperation with the
OREGON WATER RESOURCES DEPARTMENT**

Portland, Oregon: 2002

U.S. DEPARTMENT OF THE INTERIOR

GALE A. NORTON, Secretary

U.S. GEOLOGICAL SURVEY

CHARLES G. GROAT, Director

The use of trade, product, or firm names in this publication is for descriptive purposes only and does not imply endorsement by the U.S. Government.

For additional information contact:

**District Chief
U.S. Geological Survey
10615 S.E. Cherry Blossom Drive
Portland, OR 97216-3159
E-mail: info-or@usgs.gov
Internet: <http://oregon.usgs.gov>**

Copies of this report can be purchased from:

**USGS Information Services
Box 25286, Federal Center
Denver, CO 80225-0046
Telephone: 1-888-ASK-USGS**

Suggested citation:

Lee, K.K., and Risley, J.C., 2002, Estimates of ground-water recharge, base flow, and stream reach gains and losses in the Willamette River Basin, Oregon: U.S. Geological Survey Water-Resources Investigations Report 01-4215, 52 p.

CONTENTS

Abstract	1
Introduction	1
Purpose and Scope	2
Approach	2
Study Area Description	2
Acknowledgments	4
Methods.....	4
Precipitation-Runoff Modeling	5
Model Description.....	5
Model Modifications.....	6
Hydrologic Response Unit Recharge	6
Irrigation	7
Delineation of Basin Physical Characteristics	8
Land Use.....	8
Slope and Aspect	9
Soils	9
Surficial Geology.....	9
Model Parameterization	9
Hydrologic Response Unit-Related Parameters 9	
Basinwide Parameters	10
Time-Series Input Data	11
Precipitation.....	11
Air Temperature	11
Verification	11
Daily Time-Period Comparisons 14	
Annual Time-Period Comparisons 14	
Recharge and Base-Flow Estimates from Streamflow Records.....	16
Recharge Estimates	16
Base-Flow Estimates.....	16
Unregulated Streams	17
Unregulated Streams with Discontinued Streamflow-Gaging Stations 17	
Regulated Streams 20	
Accuracy 20	
Stream Gain-Loss Field Investigations 20	
Ground-Water Recharge Estimates	23
Recharge Estimates From Precipitation-Runoff Model.....	23
Results	23
Recharge Estimates from Daily Streamflow Records 26	
Recharge Estimates from Willamette Lowland Regional Aquifer-System Analysis 26	
Comparison of Recharge Estimates	29
Base-Flow Estimates	29
Base-Flow-Separation Analysis	29
Stream Reach Gain/Loss Estimates.....	30
Middle Fork and Main-Stem Willamette River	31
South Yamhill River	33
Pudding River	33
South Santiam River	35
Summary and Conclusions.....	36
Selected References	38
Appendix 1. Recharge and base-flow estimates at streamflow-gaging-station locations in the Willamette River Basin.....	43

Appendix 2. Measurements used to define gains and losses in the Middle Fork Willamette, Willamette, South Yamhill, Pudding, and South Santiam Rivers	47
--	----

PLATE

1. Map showing base flow as a percentage of total streamflow at selected sites in the Willamette River Basin, Oregon, water years 1995 and 1966–96.

TABLES

Table 1. Weekly irrigation application rates used in the Precipitation-Runoff Modeling for the Willamette River Basin, Oregon	7
Table 2. Hydrologic soil groups used in the study	9
Table 3. Geologic assemblages grouped according to water-bearing characteristics	10
Table 4. Basin spatial-coverage categories and corresponding code numbers	11
Table 5. Climate stations used to collect data for input to precipitation-runoff models of the Willamette River Basin, Oregon	13
Table 6. Comparison of observed and simulated 1995 water year runoff for nine unregulated small subbasins in the Willamette River Basin, Oregon.....	16
Table 7. Comparison of observed and simulated mean annual flow at selected sites in the Willamette River Basin, Oregon	19
Table 8. Estimates of mean annual recharge on the basis of mean annual precipitation, generalized surficial geology, and land-use and land-cover categories from the Willamette Lowland Regional Aquifer System Analysis	28

FIGURES

Figure 1. Map showing Willamette River Basin, Oregon.....	3
Figure 2. Flow diagram of the Precipitation-Runoff Modeling System conceptual model	5
Figure 3. Map showing major subbasins of the Willamette River Basin, Oregon.....	8
Figure 4. Map showing mean annual precipitation in the Willamette River Basin, Oregon, 1961–90	12
Figure 5. Map showing location of climatological stations in the Willamette River Basin, Oregon, at which data used in this study were collected	15
Figure 6. Graph showing observed and simulated 1995 daily mean flow for station 14187000 on Wiley Creek near Foster, Oregon	17
Figure 7. Map showing difference in mean annual observed and simulated flow at selected gages throughout the Willamette River Basin, Oregon, 1973–96	18
Figure 8. Graphs showing annual mean observed and simulated discharge for three sites in the Willamette River Basin, Oregon	21
Figure 9. Graph showing relation of annual mean streamflow to estimated annual mean base flow at Calapooia River at Holley, Oregon (14172000), for water years 1936–90.....	22
Figure 10. Map showing model simulation results for hydrologic parameters in the Willamette River Basin, Oregon, 1973–96	24
Figure 11. Maps showing comparison of Precipitation-Runoff Modeling System simulated mean annual recharge and Willamette Lowland Aquifer estimated mean annual recharge	27
Figure 12. Graph showing observed and simulated streamflow, base flow estimated from base-flow separation, and base flow estimated from PRMS on the Calapooia River at Holley, Oregon (14172000)	30
Figure 13. Graph showing daily mean discharge for the 1996 water year, discharge at time of seepage measurements, and precipitation at Salem, Oregon.....	31
Figure 14. Graph showing gains to and losses from selected reaches of the Middle Fork Willamette River from Jasper to Springfield and the Willamette River from Eugene to Wilsonville, Oregon, for the periods April–May and July–August 1996	32
Figure 15. Graph showing gains to and losses from selected reaches of the South Yamhill River from	

Sheridan to McMinnville, Oregon, for June and September 1996	33
Figure 16. Graph showing daily mean discharge for water year 1996, discharge at time of seepage measurement, and precipitation at Salem, Oregon	34
Figure 17. Graph showing gains to and losses from selected reaches of the Pudding River from Silverton to Aurora, Oregon, for May and September 1996.....	35
Figure 18. Graph showing gains to and losses from the South Santiam River from Foster to Lebanon, Oregon, for April and September 1996	36

CONVERSION FACTORS

Multiply	By	To obtain
cubic foot per second (ft ³ /s)	0.02832	cubic meter per second (m ³ /s)
inch	25.4	millimeter (mm)
foot (ft)	0.3048	meter (m)
mile (mi)	1.609	kilometer (km)
square mile (mi ²)	2.590	square kilometer (km ²)

Temperature in degrees Celsius (°C) as follows:

$$^{\circ}\text{C} = (^{\circ}\text{F} - 32) / 1.8.$$

Sea level: In this report “sea level” refers to the National Geodetic Vertical Datum of 1929 (NGVD of 1929)—a geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, called Mean Sea Level of 1929.

Estimates of Ground-Water Recharge, Base Flow, and Stream-Reach Gains and Losses in the Willamette River Basin, Oregon

By Karl K. Lee *and* John C. Risley

Abstract

Precipitation-runoff models, base-flow-separation techniques, and stream gain-loss measurements were used to study recharge and ground-water surface-water interaction as part of a study of the ground-water resources of the Willamette River Basin. The study was a cooperative effort between the U.S. Geological Survey (USGS) and the State of Oregon Water Resources Department (OWRD). Precipitation-runoff models were used to estimate the water budget of 216 subbasins in the Willamette River Basin. The models were also used to compute long-term average recharge and base flow. Recharge and base-flow estimates will be used as input to a regional ground-water flow model, within the same study. Recharge and base-flow estimates were made using daily streamflow records. Recharge estimates were made at 16 streamflow-gaging-station locations and were compared to recharge estimates from the precipitation-runoff models. Base-flow separation methods were used to identify the base-flow component of streamflow at 52 currently operated and discontinued streamflow-gaging-station locations. Stream gain-loss measurements were made on the Middle Fork Willamette, Willamette, South Yamhill, Pudding, and South Santiam Rivers, and were used to identify and quantify gaining and losing stream reaches both spatially and temporally. These

measurements provide further understanding of ground-water/surface-water interactions.

INTRODUCTION

Approximately 70 percent of the population of Oregon lives in the Willamette River Basin. The growing population and economy of the basin is increasing the demand for water for urban, industrial, and agricultural uses. Although western Oregon is known for its abundant precipitation, most of it falls from October through May. Summer precipitation is insufficient to meet water demands. Because of this, many streams in the Willamette River Basin are closed to additional out-of-stream appropriations in the summer. Therefore, ground water is the main resource available to satisfy the growing water demand. An evaluation of the impact of this demand requires a quantitative understanding of the water budget of the basin, including an evaluation of the potential impacts of ground-water pumpage on streamflow. In 1995, the U.S. Geological Survey (USGS) began a cooperative study with the Oregon Water Resources Department (OWRD) to better understand the ground-water hydrology of the region. The principal means to accomplish this goal is to develop and calibrate a numerical ground-water flow model. This ground-water-flow model will serve as a tool to help understand declining ground-water levels, the effect of ground-water withdrawals on ground-water levels and streamflow, and assess the effects of possible management scenarios.

The cooperative study seeks to address three major ground-water management issues in the Willamette River Basin identified by the OWRD (1992):

(1) understanding ground-water/surface-water connections, (2) controlling long-term ground-water-level declines, and (3) identifying spatial distribution of arsenic concentrations in ground water of the Willamette River Basin.

The study has generated three reports prior to this one. Ground-water data collected and compiled for this regional ground-water study are available in printed and digital form (Orzol and others, 2000). O'Connor and others (2001) documented the extent, thickness, and description of coarse-grained alluvial deposits underlying and adjacent to the Willamette River and its major tributaries, which are important to understand the interaction between surface and ground water. Hinkle and Polette (1999) discussed the distribution of naturally occurring arsenic in ground water.

Purpose and Scope

This report estimates annual recharge to the ground-water system of the Willamette Valley and evaluates the exchange of water between streams and the ground-water system. This information is needed to quantitatively understand the ground-water system and to coordinate the management of ground- and surface-water resources. Recharge estimates will be used as input to a regional ground-water flow model. Estimates of base flow and stream gains and losses will be used as calibration targets for the flow model.

Approach

Multiple methods of study were used for both recharge estimates and to quantify ground-water exchange with streamflow. Both recharge and the exchange of water between streams and aquifers are key components in the development and calibration of ground-water flow models. These parameters, however, are often difficult to measure or estimate with a high level of certainty. For this study, a variety of techniques were used to help identify the uncertainty and to assess the strengths and weaknesses of different approaches for determining these parameters in the study area.

Recharge was estimated using two methods. A precipitation-runoff model was used to develop a water budget, of which recharge was one component. The input to the model is precipitation and air-temperature data. The precipitation-runoff model uses mathematical equations to simulate physical processes such as snow-

melt, evapotranspiration, and infiltration. Model output includes surface runoff, recharge to the ground-water system, and ground-water discharge to streams throughout the study area. The model is calibrated using measured streamflow data. In another method, recharge was estimated at selected streamflow-gaging-station locations using daily streamflow data. This method describes streamflow recession during times when all flow can be considered to be ground-water discharge and estimates recharge for each peak in the streamflow record.

Annual mean base flow was estimated using two methods. First, estimates of recharge made by the precipitation-runoff model were assumed to be equal to base flow. Second, base flow was estimated at selected streamflow-gaging-station locations using hydrograph separation, which differentiates the surface-runoff component from the ground-water discharge component of streamflow.

Measurements of streamflow were made to identify gaining or losing stream reaches. These gains or losses in streamflow may be attributed to ground-water flow to or from the stream. Results were compared to previous gain/loss studies in the Willamette River Basin.

Study Area Description

The Willamette River Basin (fig. 1) has an area of approximately 12,000 mi² (square miles) and contains the State's four largest cities, Portland, Eugene, Salem, and Gresham. Approximately 2 million people, 70 percent of the total population of the State, live in the basin (U.S. Census Bureau, 2000). The basin supports an economy based on agriculture, manufacturing, timber, and recreation and contains extensive fish and wildlife habitat.

The Willamette River Basin has a temperate marine climate characterized by dry summers and wet winters. About 80 percent of annual precipitation falls between October and May, resulting in dry conditions during the summer, when demand for water is high. Mean annual precipitation ranges from about 40 inches in the lowlands to 175 inches at the crests of the Coast and Cascade Ranges. About 35 percent of the precipitation at and above 4,000 foot elevation falls as snow, and more than 75 percent falls at and above 7,000 feet as snow. Because the basin is largely dominated by marine air, both annual and diurnal temperature

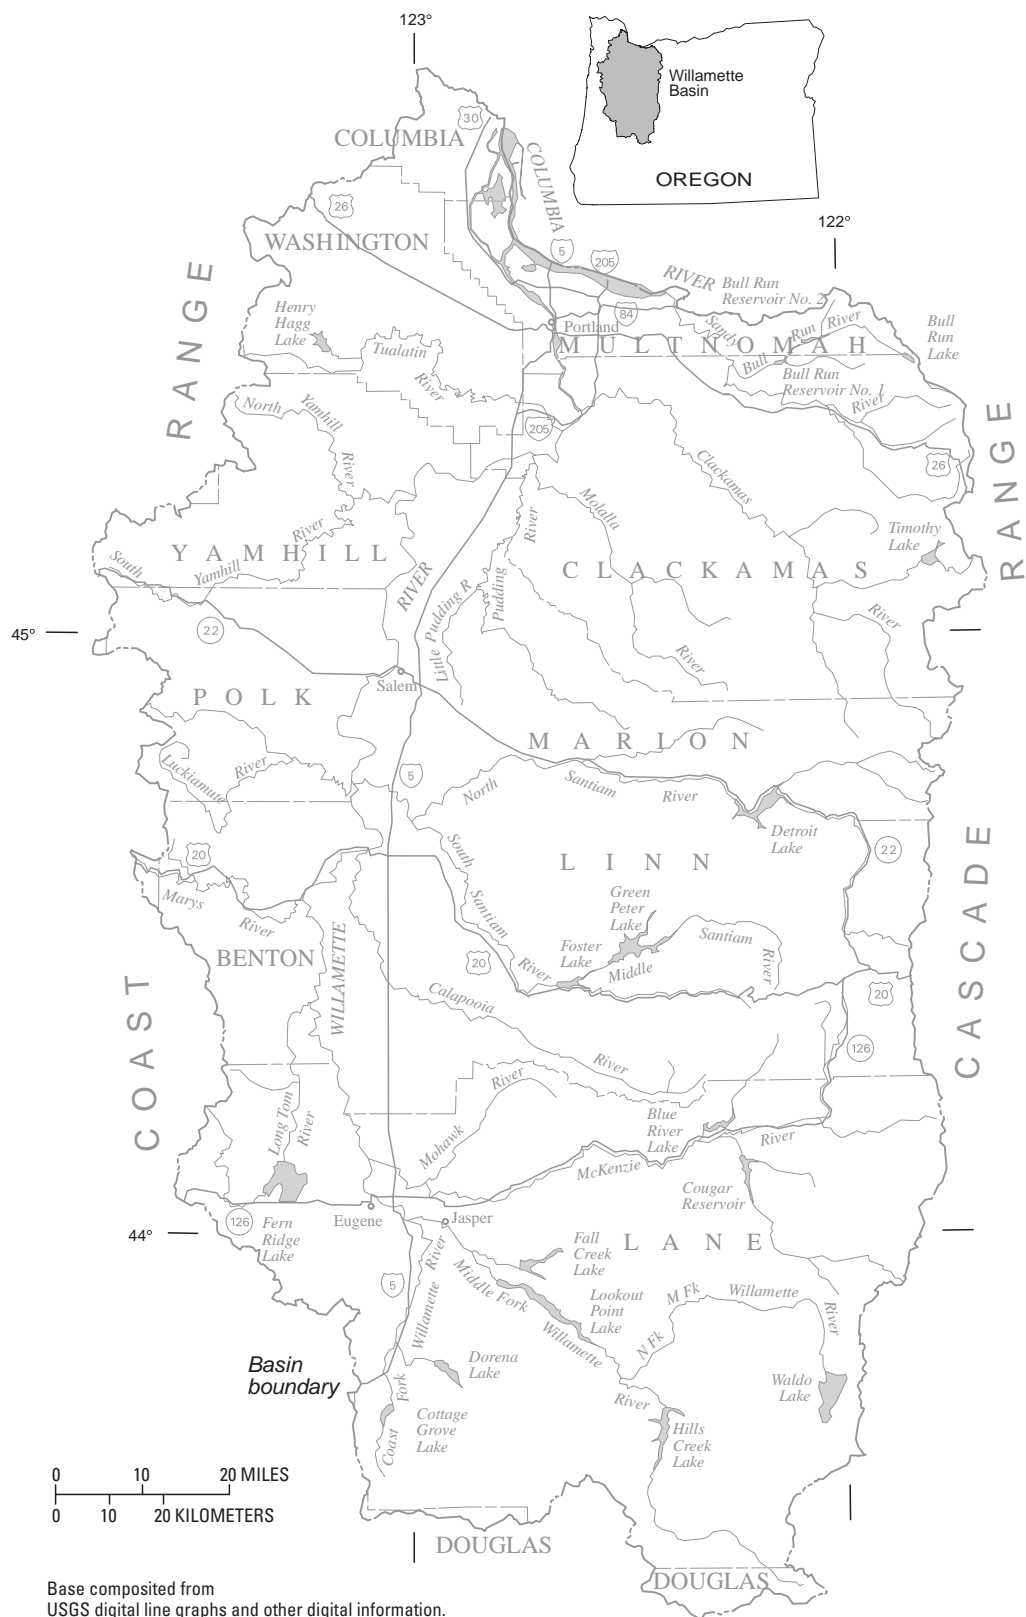


Figure 1. Willamette River Basin, Oregon.

ranges are relatively small. In the basin, the average annual temperature ranges between 40 degrees Fahrenheit ($^{\circ}\text{F}$) to 65°F , and is primarily dependent on elevation. The average daily minimum is 30°F in January and the average daily maximum temperature is 80°F in July at lower elevations in the valley.

Most of the flow in the Willamette River occurs from November to March as a result of persistent winter rainstorms and spring snowmelt. Snowmelt supplies about 35 percent of the annual flow, either directly to the stream or indirectly through the ground-water system (Laenen and Risley, 1997).

The basin is bounded on the west by the Coast Range, on the east by the Cascade Range, on the south by the Calapooya Divide, and on the north by the Columbia River. Elevations range from less than 10 feet above sea level near the Columbia River to about 4,000 feet in the Coast Range and the Calapooya Divide, to more than 10,000 feet in the Cascade Range. About 20 percent of the basin is above 4,000 feet, which is considered the lower limit of the transient snow zone. On the basis of physiography (Fenneman, 1931) and geology (Baldwin, 1981), the Willamette River Basin can be divided into three north-south-trending provinces: the Cascade Range, the Coast Range, and the Willamette River Valley.

The slopes and foothills of the Cascade Range account for more than 50 percent of the basin area. The Cascade Range is composed of volcanic rocks consisting of (1) Tertiary basaltic and andesitic rocks with associated volcanic debris, primarily in the western part of the range, and (2) Quaternary basaltic and andesitic lava flows, primarily in the High Cascade Range.

The slopes and foothills of the Coast Range make up about 20 percent of the basin area. The Coast Range is composed of Tertiary marine sandstone, shale, and mudstone interbedded with volcanic basalt flows and volcanic debris.

The Willamette River Valley, generally considered the part of the basin below 500 feet, is about 30 mi wide and 117 mi long and represents about 30 percent of the basin area. Much of the terrain in the Willamette River Valley up to an elevation of about 400 feet is covered by sandy to silty terrace deposits that border existing rivers and form alluvial fans near river mouths. These deposits were derived from the surrounding mountains, and they consist of intermingling layers of clay, silt, sand, and gravel.

At the surface, the lowlands of the Willamette River valley are covered mostly by fine-grained depos-

its (silt to fine sand), except in the Portland area, Canby, and the flood plain of some of the major streams where coarse-grained deposits occur. Coarse-grained material underlies the fine-grained deposits, and in some areas these deposits are hundreds of feet thick, such as in buried alluvial fans along the east side of the valley. With the exception of the Willamette, Santiam, and McKenzie Rivers, most rivers flow over the fine-grained material.

The main stem of the Willamette River is formed by the confluence of the Coast and Middle Forks near Eugene and flows 187 mi to the Columbia River. The main stem can be divided into four distinct reaches whose physical characteristics govern the hydraulics of flow. The upper reach extends from Eugene to Albany, river mile (RM) 187 to 119, and is characterized by a meandering and braided channel with many islands and sloughs. The river is shallow and the bed is composed almost entirely of cobbles and gravel which, during the summer, are covered with biological growth. The middle reach extends from Albany to the mouth of the Yamhill River, RM 119 to 55, and is characterized by a meandering channel deeply incised into the valley. The Newberg Pool reach extends from RM 55 to Willamette Falls at RM 26.5. Hydraulically, the deep, slow-moving pool can be characterized as a reservoir. The pool is a depositional area for small gravel-to silt-sized material. The Newberg Pool terminates at Willamette Falls, a 50-foot high natural falls, with flashboards used to control pool elevation during the summer. The tidal reach, which is downstream of Willamette Falls, is controlled by backwater from the Columbia River.

Acknowledgments

The authors wish to acknowledge the help of Ken Skach of the U.S. Geological Survey in Portland, Oregon, for GIS assistance and for writing script programs that processed data and model output files. We would also like to thank George Taylor, Oregon State Climatologist, for providing climatological data.

METHODS

The following sections describe the methods used to estimate recharge to the aquifer, base flow, and streamflow gain and losses in selected stream reaches. These methods include precipitation-runoff models,

recharge and base-flow estimates from daily stream-flow records, and gain-loss measurements.

Precipitation-Runoff Modeling

Precipitation-runoff modeling was used in the study to provide an approximation of the water budget and to provide inputs for a ground-water model of the study area.

Model Description

Precipitation-runoff models for the Willamette River Basin were developed in an earlier USGS study with the Oregon Department of Environmental Quality (ODEQ) (Laenen and Risley, 1997). These models, based on the Precipitation-Runoff Modeling System (PRMS) program (Leavesley and others, 1983), were constructed to estimate ungaged tributary inflows for stream-channel routing models. The routing models were used with a solute-transport model to calculate water-quality constituent loads. The models constructed in that study encompassed regions adjacent to the main stem of the Willamette River and the lower regions of the major tributaries. For this study, the precipitation-runoff models were expanded to a total of 216 small subbasins. Additionally, revised and more detailed land-surface data were used to refine the models.

The PRMS model is designed to analyze the effects of precipitation, climate, and land-use on streamflow within the confines of a drainage basin. The model uses mathematical equations to simulate physical processes such as precipitation, snowmelt, evaporation, evapotranspiration, interception, and infiltration. Land surface heterogeneity is accounted for by partitioning the basin into areas based on user-defined criteria such as elevation, slope, aspect, land use, soil type, geology, and precipitation. Areas with similar properties are assumed to respond in a hydrologically similar manner and are designated as a hydrologic-response unit (HRU). The user determines the size, shape, and number of HRUs that will be used in a basin model. A PRMS basin model can be assigned any number of HRUs. For the 216 subbasins modeled in this study, thousands of HRUs were delineated.

In PRMS, the basin hydrologic cycle is conceptualized as a series of reservoirs (fig. 2). The model computes the movement of water and/or energy between the reservoirs for each time step during the simulation.

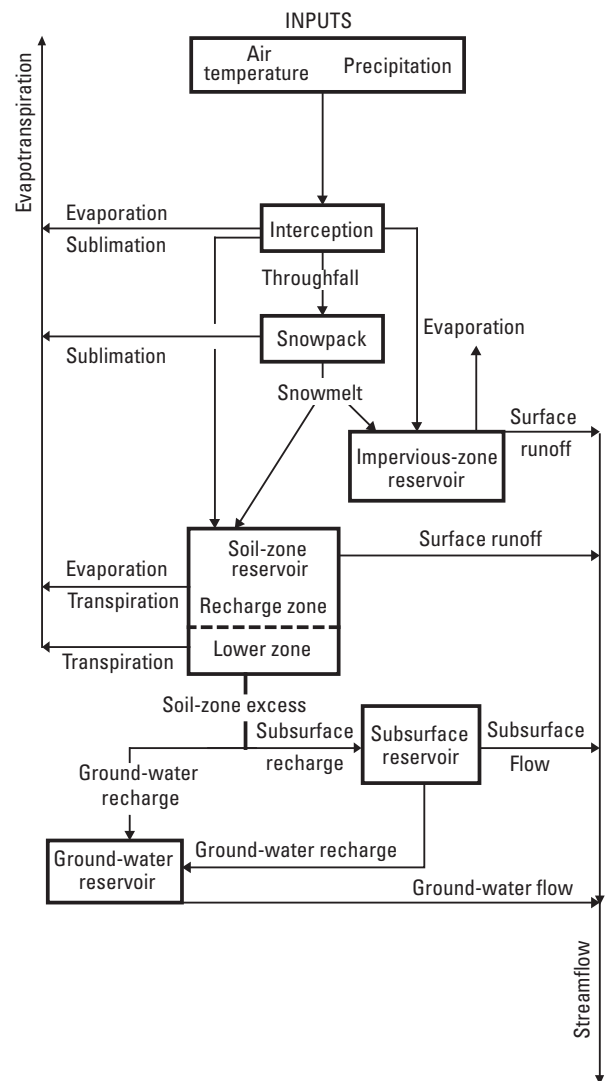


Figure 2. Flow diagram of the Precipitation-Runoff Modeling System conceptual model (Leavesley and others, 1983).

Each PRMS basin model is self-contained. Water does not flow laterally from one basin model to another. System inputs of precipitation and air temperature (or pan evaporation) drive the processes of evaporation, transpiration, snowfall and snowmelt, and sublimation. In this study, PRMS was operated in the daily mode. Streamflow at the outlet of a basin model is the sum of the various reservoir contributions, which are summed from the HRUs in the basin. In addition to flow at the basin outlet, model output includes all reservoir storage levels and all flows between the reservoirs.

During each time step, precipitation can fall on impervious surfaces, pervious surfaces, or snowpack. The entire surface area of each HRU is characterized as impervious or pervious by the user. Snowpack conditions can occur on either impervious or pervious sur-

faces when the climate time-series input data exceeds various user defined thresholds in the model parameters.

When the surface is impervious, there is no interception storage or interception losses. Surface retention of water is conceptualized as a storage reservoir. A maximum retention storage capacity for the reservoir must be satisfied before surface flow can occur. When free of snow, the reservoir is depleted by evaporation.

For pervious surfaces, precipitation is reduced by interception in the vegetation and becomes net precipitation on the basin surface. Water stored as interception is depleted through evaporation. Water on the surface then enters the soil-zone reservoir as infiltration until the reservoir is filled. Water on the surface in excess of the soil-zone reservoir capacity becomes runoff. The soil-zone reservoir is conceptualized as a two-layered (recharge zone and lower zone) system. Each zone has user-defined depth and water-storage characteristics. Evaporation and transpiration deplete moisture from the recharge zone. However, moisture in the lower zone is depleted only through transpiration. The lower zone depth should reflect the rooting depth of the predominant vegetation type of the HRU. The Hamon method (Hamon, 1961) option within PRMS was used to estimate potential evapotranspiration in this study. The method incorporates 12 monthly coefficients that are used in conjunction with minimum and maximum air temperatures. Actual evapotranspiration is computed as a function of the available water in the two soil zone reservoirs.

For daily rainfall on a snow-free, pervious-surface HRU, surface flow is computed using the contributing- or variable-source area approach, where a dynamic saturated source area expands and contracts according to rainfall characteristics and the field capacity of the soil mantle (Troendle, 1985). As rainfall continues and the ground becomes more saturated, the proportion of precipitation diverted to surface flow increases, while the proportion that infiltrates to the soil zone and subsurface reservoir decreases.

Infiltration is assumed to capture all water from snowmelt until the soil reaches field capacity. At field capacity, infiltration is limited by a user-defined daily maximum infiltration capacity. Snowmelt in excess of this capacity becomes surface flow.

Infiltration in excess of field capacity is first used to satisfy recharge to the ground-water reservoir before surface flow begins. After ground-water recharge has been satisfied, excess infiltration from the soil zone will

recharge the subsurface reservoir. Water from the subsurface reservoir can percolate to the ground-water reservoir or move downslope to the basin outlet as subsurface flow. The rate of subsurface flow from this reservoir to the outlet is a function of the volume of water in the reservoir and two user-defined routing coefficients. The rate of flow from the subsurface reservoir to the ground-water reservoir is a function of the volume of water in the subsurface reservoir and a recharge-rate coefficient. The rate of flow from the ground-water reservoir to the basin outlet is a function of the volume of water in the reservoir and a user-defined routing coefficient. For this study, the flow from the ground-water reservoir to the outlet (base flow) was also defined as equivalent to the basin's contribution of recharge to the ground-water flow system.

Model Modifications

Minor modifications were made to the PRMS code to determine the recharge contributions of individual HRUs, whose sum total is a basinwide recharge contribution (also equivalent to base flow). Model code modifications were also made to provide water applications to HRUs that represent irrigated agricultural areas.

Hydrologic Response Unit Recharge

Modification of the PRMS model was needed because the original code was unable to simulate recharge estimates by HRU, which are needed as input to a regional ground-water model. In PRMS water moves from each HRU soil-zone reservoir to the ground-water reservoir. Water also moves from each HRU soil-zone reservoir to the subsurface reservoir and then from the subsurface reservoir to the ground-water reservoir. However, the flow from the subsurface reservoir to the ground-water reservoir is a lumped basin averaged value and not computed for each HRU. To rectify this limitation, it was assumed that the amount of flow from the subsurface reservoir to the ground-water reservoir for each HRU is proportional to the amount of flow entering the subsurface reservoir from each HRU. Consequently recharge to the aquifer (or equivalently, base flow to the stream) from each HRU was determined using the following equation:

$$RCH_{hru} = [(USS_{hru}/TOTUSS_{basin}) * ASTOGW_{basin}] + UGS_{hru} \quad (1)$$

where

RCH_{hru} is total recharge from an individual HRU to the ground-water reservoir,

USS_{hru} is flow from an individual HRU to the subsurface reservoir,

$TOTUSS_{basin}$ is sum of all flows from all HRUs to the subsurface reservoir,

$ASTOGW_{basin}$ is flow from the subsurface reservoir to the ground-water reservoir, and

UGS_{hru} is flow from an individual HRU to the ground water-reservoir.

Irrigation

A code modification was needed so that PRMS could provide water applications to HRUs that represented irrigated agricultural areas. The original PRMS code permits use of more than one rate of precipitation per basin. However, only one rate can be assigned to an HRU. For this study, an HRU having irrigated agriculture receives input from a precipitation time series and also from a second time series containing periodic irrigation applications (typically once a week from May through September). It was not possible to sum the precipitation and irrigation application time series into one file because it was necessary to apply a precipitation weight to the precipitation data and not to the irrigation application data. (The precipitation weights specific to each HRU were needed to adjust the precipitation data for elevation and orographic differences between the gage and the HRU.) The problem was rectified by modifying the PRMS code and allowing it to apply separate water precipitation and irrigation rates to HRUs classified as irrigated agriculture.

The volume of water determined for irrigation applications was based on crop consumptive-use rates. For simulating irrigation applications, a generic crop consumptive-use amount of 22 inches per season was applied to the entire Willamette River Valley. This amount was based on evaluation of the consumptive use rates of predominant irrigated crops in the valley, which include hay, alfalfa, snap beans, mint, sweet corn, potatoes, onions, and berries. Consumptive-use rate information for these crops came from county and Oregon State University agricultural extension service agents and Cuenca (1992). The seasonal total of 22 inches was divided into weekly values from May to October as shown in table 1. The distribution of water over this time period was based on a composite of information

Table 1. Weekly irrigation application rates used in the Precipitation-Runoff Modeling for the Willamette River Basin, Oregon

Date	Amount (inches)
May 4	0.75
May 11	.85
May 18	.85
May 25	.95
June 1	.95
June 8	.95
June 15	1.0
June 22	1.0
June 29	1.1
July 6	1.25
July 13	1.5
July 20	1.5
July 27	1.25
August 3	.9
August 10	.9
August 17	.9
August 24	.9
August 31	.9
September 7	.9
September 14	.86
September 21	.86
September 28	.82
October 5	.16
Total	22.0

about the dominant crops. The rate of water consumption was assumed to be greatest in mid-July.

In the simulations, water was applied to the irrigation HRUs only on the dates shown in table 1. The amount of water applied for a given date was computed by reducing the value in the table by 75 percent of the total precipitation of the prior week of that date (as shown below). It was assumed that 75 percent of precipitation was effective water for crop consumption. This value, after reduction, was then divided by 75 percent to account for irrigation efficiency. If 75 percent of the amount of total precipitation in a prior week was greater than the amount shown in table 1 for a given date, then no water was applied to the HRU. This is shown by the equation:

$$IA_{date} = [WCU_{date} - (0.75 * CP_{date})]/0.75 \quad (2)$$

where

IA_{date} is the actual irrigation application (inches) on a given date to an irrigation designated HRU,

WCU_{date} is the estimated weekly consumptive-use rate (inches) on a given date (from table 1), and

CP_{date} is the cumulative precipitation (inches) that fell on the HRU in the 7-day period prior to the given date.


Delineation of Basin Physical Characteristics

The Willamette River Basin was partitioned into 21 major subbasins (fig. 3). These subbasins were further divided into 216 smaller subbasins. Separate PRMS models were constructed for these subbasins. For the 216 subbasin models, thousands of HRUs were delineated on the basis of land-use, slope, aspect, soils, and surficial-geology characteristics. Data layers of these five characteristics were assembled using a geographic information system (GIS). The HRUs were defined after merging these data layers into a composite data layer.

Land Use

The Willamette River Basin land cover map (scale 1:250,000) was created from Landsat thematic mapper (TM) data collected in June and August of 1992 and 1993. The original map had a total of 10 land-use categories. For this study, some categories were combined to produce the six land-use categories used in this analysis: urban, water, forest, irrigated agriculture, non-irrigated agriculture, and perennial snow.

The delineation of urban areas was based on a combination of USGS Geographic Information Retrieval and Analysis System (GIRAS) data and 1990 census data. These areas represent a population density of 1,000 or more persons per square mile. Water areas, defined by spectral classification, included rivers, lakes, reservoirs, and wetlands. The forest category included old growth, mature, and young regrowth forests. All forest land was considered to be predominantly conifer, because there are no large stands of deciduous forest. The irrigated agriculture category was generally restricted to the valley-floor region and was determined by using data from an August Landsat flyover. Non-irrigated agriculture areas included small grains, hay fields, and pastures of the valley region. This category also included nonforested upland areas, which include recent clearcuts, open grassland, nonforested alpine

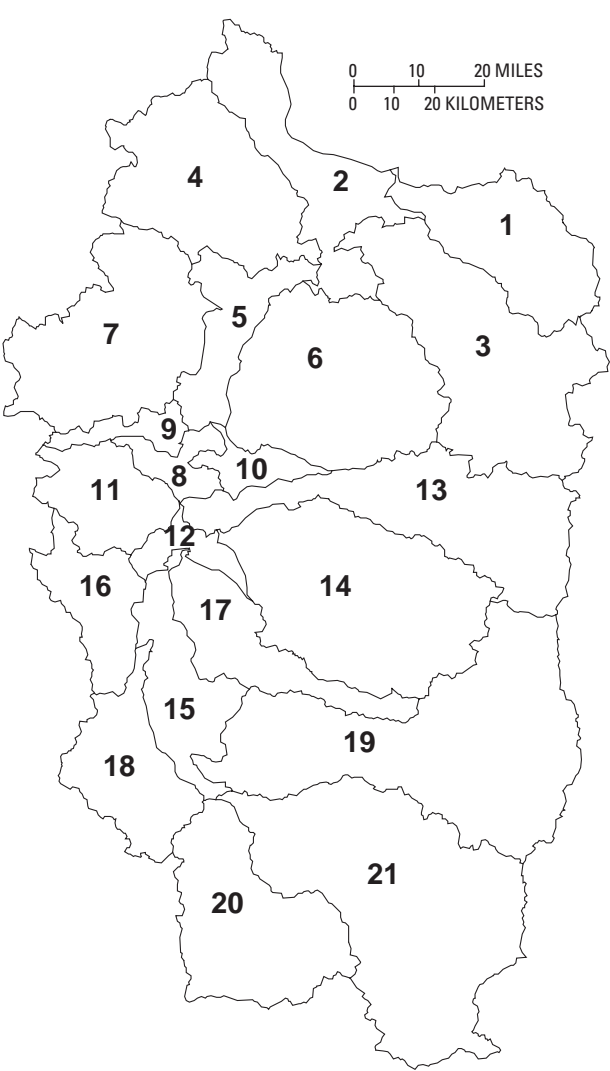

Major Willamette River Subbasins

- | | |
|---------------------|---------------------------------|
| 1 Sandy River | 12 Albany |
| 2 Portland | 13 North Santiam River |
| 3 Clackamas River | 14 South Santiam River |
| 4 Tualatin River | 15 Albany-Eugene |
| 5 Portland-Salem | 16 Marys River |
| 6 Molalla River | 17 Calapooia River |
| 7 Yamhill River | 18 Long Tom River |
| 8 Salem | 19 McKenzie River |
| 9 Rickreall Creek | 20 Coast Fork Willamette River |
| 10 Mill Creek | 21 Middle Fork Willamette River |
| 11 Luckiamute River | |

Figure 3. Major subbasins of the Willamette River Basin, Oregon

areas, and barren areas. The perennial snow category included the snow of the peaks of the Cascade Range as found in August data.

Slope and Aspect

A slope data layer for the entire river basin was created from elevation data contained in a 1:250,000 scale Digital Elevation Map (DEM) (U.S. Geological Survey, 1990). The DEM data were used to create a polygon data layer of slope containing three slope classes: 0 to 5 percent, 5 to 30 percent, and greater than 30 percent. For slopes greater than 30 percent, polygons were created to represent the four aspects of north, east, south, and west. For HRUs with slopes less than 30 percent, a basinwide aspect was assigned on the basis of the dominant aspect of the subbasin.

Soils

The soils data layer was digitized from a 1:500,000 scale Natural Resources Conservation Service (NRCS) map of Oregon soil series (1986). Based on the NRCS infiltration properties (table 2) soils were categorized into six classes: A, B, B+C, C, C+D, and D.

Surficial Geology

The surficial geology data layer was digitized from a 1:500,000 scale USGS aquifer-units map (McFarland, 1983). The data layer included five geologic assemblages found in the Willamette River Basin. The water-bearing characteristics of each unit are described in table 3.

Model Parameterization

PRMS parameters are both distributed and nondistributed. HRU-related parameters are distributed parameters which contain specific values that are spatially homogenous within each HRU, and allow a representation of varying basin surface conditions. In contrast, basinwide parameters are nondistributed (or lumped) parameters which contain values that are spatially homogenous over the entire basin.

Hydrologic Response Unit-Related Parameters

PRMS uses 43 parameters to characterize the HRU land-surface conditions and processes. Many of the values for these parameters were determined from or associated with the GIS data layers. For example, values for parameters, such as area or mean elevation, could be directly computed from the GIS data layers. Values for other parameters were determined by

Table 2. Hydrologic soil groups used in the study [Hydrologic soil groups from U.S. Natural Resources Conservation Service (formerly Soil Conservation Service), 1986]

Hydro-logic group	Infiltration rate (inches/hour)	Description
A	0.45–0.30	Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well-drained to excessively drained sand or gravelly sand.
B	0.3–0.015	Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well-drained or well-drained soils that have moderately fine texture to moderately coarse texture.
C	0.15–0.05	Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture.
D	<0.05	Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clay that has high shrink-swell potential, soils that have a permanently high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material.

associating the GIS data layers for each HRU with relational matrix tables containing PRMS parameter values. A four-digit code that identified the combination of land-use, slope and aspect, geology, and soils classes was assigned to each HRU (table 4). Separate matrix tables for geology, soils, and land use, which associated the code with corresponding PRMS parameter values, were used to assign appropriate parameter values to the HRUs. For example, in table 4, an HRU with a code of “1304” represents forest land use, 5 to 30 percent slope, Tertiary-Quaternary sedimentary deposits,

Table 3. Geologic assemblages grouped according to water-bearing characteristics

[# denotes a code number component from other categories of land use, slope, and soils; gal/min, gallons per minute (table modified from McFarland, 1983)]

Geologic assemblage and code	Lithologic description	Water-bearing characteristics
Tertiary-Quaternary sedimentary deposits ##0#	Sand, gravel, and silt, unconsolidated to consolidated; some weathered basalt and pyroclastic rocks are also included.	Permeability generally high; however, less permeable fine material is commonly interlayered with good aquifers. Wells yield more than 2,000 gal/min in some areas, but average less than 300 gal/min. Most productive aquifer unit in western Oregon.
Tertiary-Quaternary volcanic rocks of the High Cascade ##3#	Andesite and basalt, flow and pyroclastic rocks.	Largely unknown. Available data indicate variable permeability. Well yields range from a few gallons per minute to 300 gal/min. Springs issuing from the unit are commonly large.
Columbia River Basalt Group ##6#	Basalt; distinctive columnar jointing and fractured interflow zones.	Overall permeability low, but interflow zones and scoriaceous flow tops are relatively permeable. Dense, poorly permeable flow centers may limit recharge. Yields may exceed 1,000 gal/min, but are typically less than 100 gal/min.
Tertiary volcanic rocks of the Western rocks of the Western Cascade Range ##9#	Andesite, basalt, and dacite; older rocks are dominantly volcanoclastic and younger rocks are almost entirely flow material.	Permeability is generally low; however, fracturing may form localized permeable zones. Well yields may reach 100 gal/min, but average less than 20 gal/min.
Tertiary rocks of the Coast Range ##1#	Sandstone, siltstone, and mudstone, commonly tuffaceous; intrusive rocks.	Permeability low. Well yields are generally less than 10 gal/min.

and group C soils. Based on this HRU code, soil-zone parameters, such as the maximum available water-holding capacity (SMAX) and the summer vegetation-cover density (COVDNS) would be assigned values of 7.0 inches and 0.9 (decimal percent), respectively. With thousands of HRUs, a GIS Arc Macro Language (AML) program was used to automate the association between the HRU four-digit codes and the appropriate PRMS parameter values.

The amount of daily precipitation applied to each HRU was a function of daily precipitation observed at a nearby precipitation gage times a specific precipitation adjustment weight for that HRU. The weights were needed to account for elevation and orographic differences between the precipitation gage and the HRU. The weights were computed by first overlaying the HRU coverage with the Precipitation Elevation Regressions on Independent Slopes Model (PRISM) (Daly and others, 1994, 1997) precipitation coverage to determine mean annual precipitation for each HRU (fig. 4). (PRISM is a precipitation data layer that contains grid cells or contour lines of mean annual precipitation based on the period 1961 to 1990.) The mean annual precipi-

tation of the HRU was then divided by the observed mean annual precipitation for 1961 to 1990 of the precipitation gage assigned to the HRU.

Minimum and maximum air-temperature data were used by PRMS to compute potential evapotranspiration (PET) at each HRU. To account for the air-temperature difference between the elevation of the temperature station and the mean elevation of the HRU, minimum and maximum air-temperature lapse rates (change in degrees per thousand feet change in elevation) were included as PRMS parameter input. The lapse rates, based on 1961–90 mean monthly minimum and maximum air-temperature data, were computed for each tributary by Laenen and Risley (1997).

Basinwide Parameters

Most basinwide parameters in PRMS are related to potential evapotranspiration, subsurface flow, ground-water flow, and snow components of the model. These parameter values were determined through a calibration and verification process discussed in Laenen and Risley (1997). Those parameter values were not changed for this study.

Table 4. Basin spatial-coverage categories and corresponding code numbers

[Each code represents a specific polygon type created by merging the four different categories. # denotes a code number from one of the other categories; <, greater than]

Category	Code	Description
Land use	1###	Forest
	2###	Nonirrigated agriculture
	3###	Urban
	4###	Wetlands
	41##	Lakes and reservoirs
	42##	Rivers and canals
	5###	Rangeland
	6###	Irrigated agriculture
	9###	Perennial snow
Slope and aspect	#0##	0 to 5 percent (assigned aspect)
	#3##	5 to 30 percent (assigned aspect)
	#6##	> 30 percent, 0 degrees aspect (north)
	#7##	> 30 percent, 90 degrees aspect (east)
	#8##	> 30 percent, 180 degrees aspect (south)
	#9##	> 30 percent, 270 degrees aspect (west)
Geology ¹	##0#	Tertiary-Quaternary sedimentary deposits
	##1#	Tertiary rocks of the Coast Range
	##3#	Tertiary-Quaternary volcanic rocks of the High Cascade Range
	##6#	Columbia River Basalt Group
	##9#	Tertiary volcanic rocks of the Western Cascade Range
Soils ²	###1	Group A
	###2	Group B
	###3	Groups B and C
	###4	Group C
	###5	Groups C and D
	###6	Group D

¹ Definitions of these geologic assemblages are provided in table 3.

² Definitions of these soils groups are provided in table 2.

Time-Series Input Data

Daily total precipitation and maximum and minimum air-temperature time-series data collected at stations within and near the Willamette River Basin were used as PRMS model input data. All the data files had the same period—water year 1973 to 1996. This time period was used because it had the greatest number of climate stations in the study area with near continuous long-term records. If the period had been extended earlier than 1973, fewer climate records would have been available.

Precipitation

Precipitation data were used from a statewide climate data inventory compiled by the State Climatologist (Redmond, 1985). Most of the precipitation data were collected under the auspices of the National Weather Service (NWS) Cooperative Program. The location names, identification number, latitude and longitude, and elevations of the precipitation data stations used in this study are shown in table 5. Site locations are shown in figure 5. Linear regression equations were used to correlate to records of neighboring stations and estimate missing values in the records.

Air Temperature

Daily maximum and minimum air-temperature data were also provided by the State Climatologist and collected by the NWS. Most of the climate stations listed in table 5 had daily maximum and minimum air temperature records for the model simulation time periods. Linear regression equations as correlated to records of neighboring stations were also used to estimate missing values in the records.

Verification

Most of the PRMS parameter values were selected during a calibration process used by Laenen and Risley, 1997. However, with the refinements to the model that were made in this study it was necessary to make additional comparisons between simulated and observed flows. These comparisons included daily time periods using small unregulated basins and long term annual-time periods. The basins used in the latter comparison were of varying size and had varying levels of regulation.

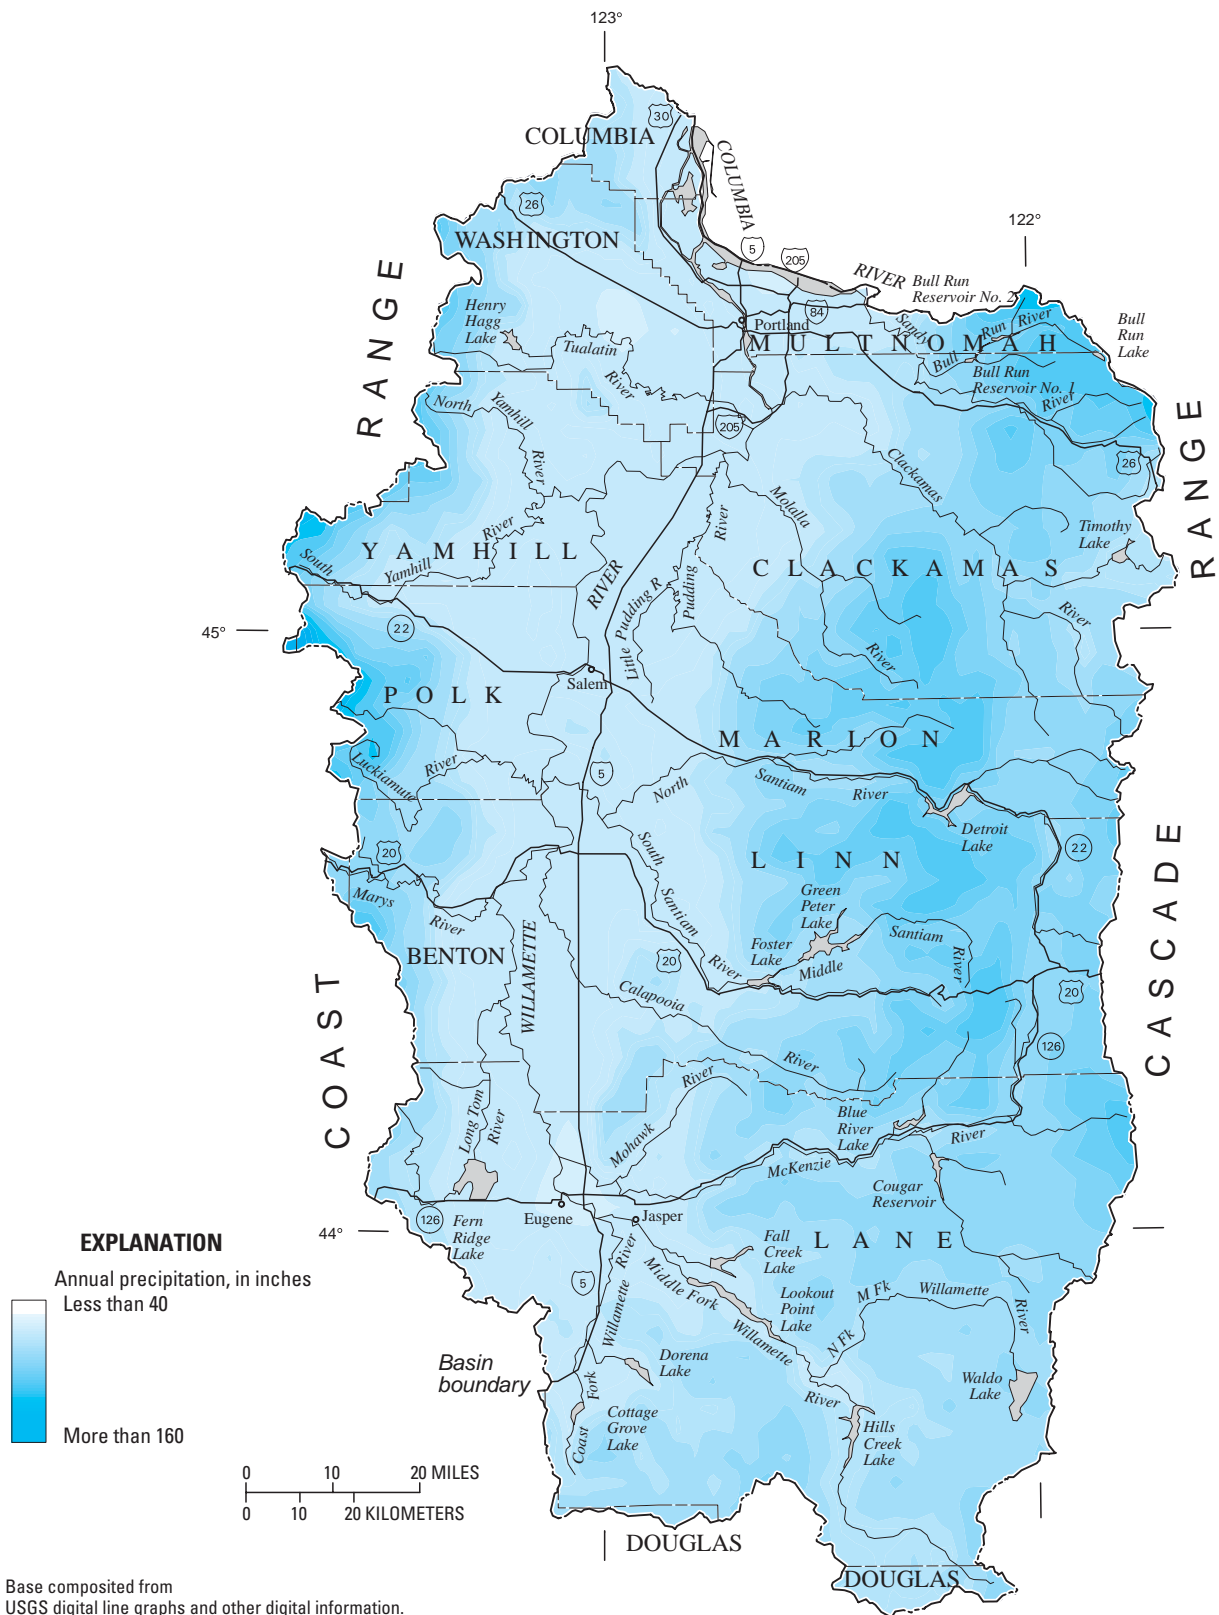


Figure 4. Mean annual precipitation in the Willamette River Basin, Oregon, 1961–90. (modified from Taylor, 1993 or from Daly and others, 1994 and 1997).

Table 5. Climate stations used to collect data for input to precipitation-runoff models of the Willamette River Basin, Oregon

[Map numbers refer to figure 5; °, degrees; ', minutes; ", seconds]

Map number	Station name	Station number ¹	Station location (latitude – longitude)		Elevation (feet)
1	Aurora	sod350343	45°14'0"	– 122°45'0"	720
2	Beaverton SSW	sod350595	45°30'0"	– 122°49'0"	150
3	Bellfountain	sod350673	44°22'0"	– 123°21'0"	320
4	Blackbutte	sod350781	43°35'0"	– 123°4'0"	970
5	Bonneville Dam	sod350897	45°38'0"	– 121°57'0"	60
6	Cascadia	sod351433	44°24'0"	– 122°29'0"	860
7	Clatskanie	sod351643	46° 6'0"	– 123°17'0"	22
8	Corvallis OSU	sod351862	44°38'0"	– 123°12'0"	225
9	Corvallis Water	sod351877	44°31'0"	– 123°27'0"	592
10	Cottage Grove IS	sod351897	43°47'0"	– 123°4'0"	650
11	Cottage Grove Dam	sod351902	43°43'0"	– 123°3'0"	831
12	Dallas	sod352112	44°56'0"	– 123°19'0"	290
13	Dilley	sod352325	45°29'0"	– 123°7'0"	165
14	Dorena Dam	sod352374	43°47'0"	– 122°58'0"	820
15	Eagle Creek	sod352493	45°17'0"	– 122°12'0"	930
16	Estacada	sod352693	45°16'0"	– 122°19'0"	410
17	Eugene WSOAP	sod352709	44°7'0"	– 123°13'0"	364
18	Fern Ridge Dam	sod352867	44°7'0"	– 123°18'0"	485
19	Forest Grove	sod352997	45°32'0"	– 123°6'0"	180
20	Foster Dam	sod353047	44°25'0"	– 122°40'0"	550
21	Glenwood	sod353318	45°39'0"	– 123°16'0"	640
22	Gresham	sod353521	45°30'0"	– 122°26'0"	310
23	Haskins Dam	sod353705	45°19'0"	– 123°21'0"	756
24	Headworks	sod353770	45°27'0"	– 122°9'0"	748
25	Hillsboro	sod353908	45°31'0"	– 122°59'0"	160
26	Holley	sod353971	44°21'0"	– 122°47'0"	540
27	Lacomb	sod354606	44°37'0"	– 122°43'0"	520
28	Leaburg ISW	sod354811	44°6'0"	– 122°41'0"	675
29	Lookout Point Dam	sod355050	43°55'0"	– 122°46'0"	712
30	McMinnville	sod355384	45°14'0"	– 123°11'0"	148
31	N. Willamette ES	sod356151	45°17'0"	– 122°45'0"	150
32	Noti	sod356173	44°4'0"	– 123°28'0"	450
33	Oregon City	sod356334	45°21'0"	– 122°36'0"	167
34	Portland KGW-TV	sod356749	45°31'0"	– 122°41'0"	160
35	Portland WSOAP	sod356751	45°36'0"	– 122° 36'0"	21
36	Rex	sod357127	44°18'0"	– 122°55'0"	520
38	Salem WSOAP	sod357500	44°55'0"	– 123°1'0"	195
39	Scotts Mills	sod357631	44°57'0"	– 122°32'0"	2,315
40	Silver Creek Falls	sod357809	44°52'0"	– 122°39'0"	1,350

Table 5. Climate stations used to collect data for input to precipitation-runoff models of the Willamette River Basin, Oregon—Continued

[Map numbers refer to figure 5; °, degrees; ', minutes; ", seconds]

Map number	Station name	Station number ¹	Station location (latitude – longitude)		Elevation (feet)
41	Silverton	sod357823	45°00'0"	– 122°46'0"	408
42	Stayton	sod358095	44°48'0"	– 122°46'0"	470
43	Troutdale	sod358634	45°34'0"	– 122° 24'0"	29
44	Waterloo	sod359083	44°30'0"	– 122°49'0"	450
45	Belknap Springs	cnv0652	44°18'0"	– 122°2'0"	2,152
46	Detroit Dam	cnv2292	44°43'0"	– 122°15'0"	1,220
47	Government Camp	cnv3908	45°18'0"	– 121°45'0"	3,980
48	Marion Forks	cnv5221	44°37'0"	– 121°57'0"	2,480
49	McKenzie Bridge	cnv5362	44°11'0"	– 122°7'0"	1,478
50	Oakridge	cnv6213	43°45'0"	– 122°27'0"	1,275
51	Santiam Pass	cnv7559	44°25'0"	– 121°52'0"	4,748
52	Three Lynx	cnv8466	45°7'0"	– 122°4'0"	1,120
53	Valsetz	sod358833	44°51'0"	– 123°40'0"	1,150
54	Sisters	cnv7857	44°17'0"	– 121°33'0"	3,180

¹State Climatologist station-identification number.

Daily Time-Period Comparisons

Flow data collected at nine small, unregulated, gaged basins were compared with PRMS simulated flows. A comparison of observed and simulated water year 1995 flow is shown in table 6. Figure 6 shows a comparison of observed and simulated daily mean flow for one of the subbasins—Wiley Creek (station 14187000) near Foster in the South Santiam River subbasin. Generally, most of the simulated peak flows were slightly under the observed peak flows, and the simulated low-flow recessions were slightly higher than the observed low-flow recessions. Overall, the simulated annual flow was slightly less than observed annual flow. The model showed underestimation in basins on the west side of the Cascade Range and overestimation on the Coast Range side of the Willamette River Basin. Simulation errors could be attributed to the inability of the weighted precipitation input data to adequately represent the actual precipitation that fell within the basin. For this simulation precipitation data collected at Foster Dam, which is located outside of the Wiley Creek Basin, was used.

The timing of the simulated peaks was consistently close to the observed data for all nine basins. Most of the plots showed that simulated peak flows were under the observed peak flows and simulated low flows were above observed low flows. However, simu-

lated annual mean flows were not consistently above or below observed annual mean flows (table 6).

Annual Time-Period Comparisons

Continuous simulations were made for the 216 subbasins for the water year 1973 to 1996 period. The simulations were run on a daily time step; however, the output was reduced to annual values. The annual flows simulated by PRMS were compared with observed annual flows at 47 selected streamflow gages on streams draining basins of varying size throughout the Willamette River Basin (fig. 7 and table 7). Although some of these basins are regulated by dams, it was assumed that this effect was not significant on an annual basis. None of these basins had major flow diversions entering or leaving the basin from locations above the gage. Figure 7 shows spatially how PRMS compared with observed data from the 47 basins. Approximately 60 percent of these basins had an underestimation of annual flow, and the remaining 40 percent had an overestimation of annual flow. When these annual flow values are plotted over the 24-year period, as shown in figure 8, the simulated annual flows show fairly consistent correspondence with observed annual flows in both wet and dry years. Results of the precipitation-runoff modeling (simulated base flow and recharge) is discussed in the subsequent sections.

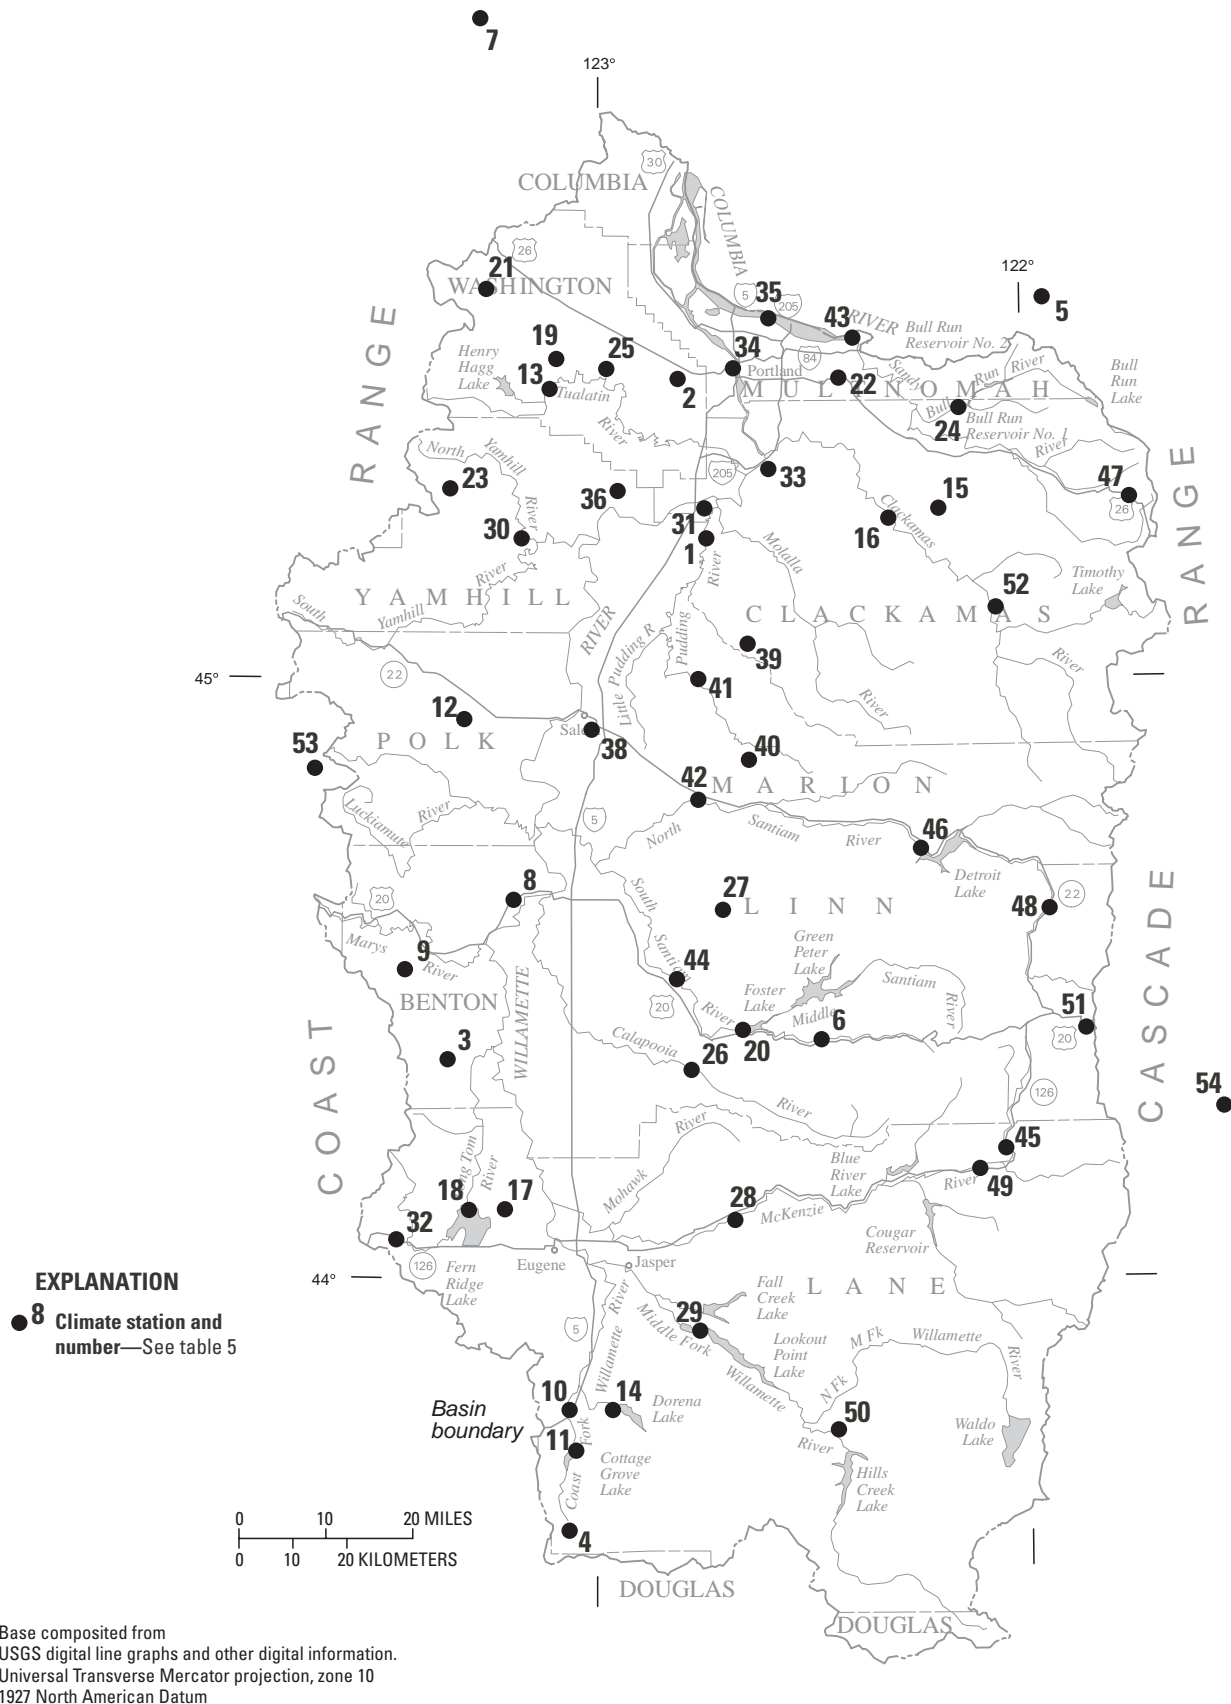


Figure 5. Location of climatological stations in the Willamette River Basin, Oregon, at which data used in this study were collected.

Table 6. Comparison of observed and simulated 1995 water year runoff for nine unregulated small subbasins in the Willamette River Basin, Oregon

Basin name	Station number	Drainage area (square miles)	Runoff (inches)		Percent difference ¹
			Observed	Simulated	
Fall Creek near Lowell	14150300	118	45.5	44.2	-2.86
Row River above Pitcher Creek near Dorena	14154500	211	39.2	50.8	29.6
Smith River above Smith River reservoir near Belknap Springs	14158790	16.2	79.6	78.0	-2.01
Long Tom River near Noti	14166500	89.3	45.9	64.4	40.3
Little North Santiam River near Mehama	14182500	112	87.8	85.0	-3.19
Wiley Creek near Foster	14187000	51.8	53.6	51.4	-4.10
South Yamhill near Wil- lamina	14192500	133	73.1	86.5	18.3
Zollner Creek near Mount Angel	14201300	15	23.3	30.4	30.5
Fish Creek near Three Lynx	14209700	45.2	76.7	91.4	19.2

¹Difference shown in percent = 100 x ([simulated runoff - observed runoff]/observed runoff).

Recharge and Base-Flow Estimates from Streamflow Records

Estimates of recharge and base flow for many locations in the Willamette Basin were made using long-term streamflow records. The computer programs RECESS (from “streamflow recession”) and RORA (from the “Rorabaugh method”) were used in conjunction with each other for recharge estimates, and the program PART (from “streamflow partitioning”) was used for base-flow estimates (Rutledge, 1998).

Recharge Estimates

Recharge estimates were compared to recharge estimated by the rainfall-runoff model. RECESS is used to determine the master recession curve of streamflow recession during times when all flow can be considered

to be ground-water discharge and when the profile of the ground-water head distribution is nearly stable. Development of the recession curve for each stream requires several years of daily streamflow record. The recession curve is based on the winter period of January through March, during which time the effect of evapotranspiration is assumed to be minimal. RORA uses the recession-curve displacement method to estimate the recharge for each peak in the streamflow record. RORA was run using default conditions as described in Rutledge (1998).

Base-Flow Estimates

Base-flow-separation analysis is a technique for estimating the ground-water component of streamflow.

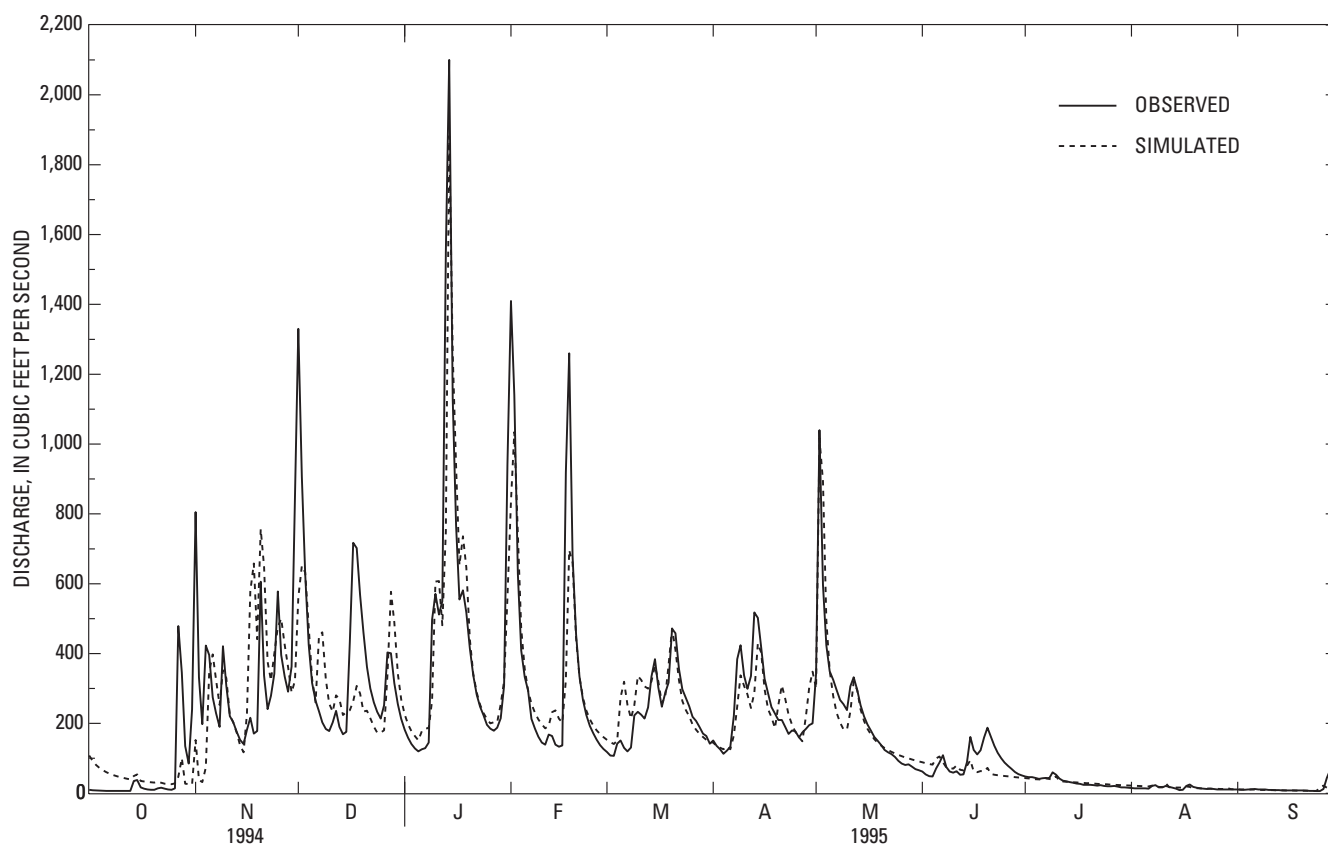


Figure 6. Observed and simulated 1995 daily mean flow for station 14187000 on Wiley Creek near Foster, Oregon.

Base-flow estimates are needed for calibration of the ground-water flow model. The base-flow component of streamflow at selected locations in the Willamette River Basin was determined for water years 1995–96. Numerous stream gages in the Willamette River Basin were either discontinued during the 1995–96 period of interest, or the streams were regulated by diversions or dams. As base-flow separation can only be done on unregulated streams, techniques were used to estimate base flow at discontinued and regulated sites.

Unregulated Streams

For unregulated streams, base flow was separated from total streamflow using a computer program developed by Rutledge (1998) called PART. PART scans the record of daily streamflow for days that fit a requirement of antecedent recession. A daily streamflow recession rate of less than 0.1 log cycle is assumed to be the point at which surface runoff is negligible and streamflow is derived entirely from ground-water discharge. The program assigns base flow equal to total streamflow on these days. The program then uses linear

interpolation to estimate base flow on the remaining days. PART was run using default conditions.

Unregulated Streams with Discontinued Streamflow-Gaging Stations

Base-flow estimates for water years 1995–96 were made for discontinued unregulated streamflow-gaging-station locations using a four-step procedure. First, base-flow separation was done on the existing period of record. Second, the relation of annual mean base flow to annual mean total flow was determined using linear regression. Third, annual mean streamflow for water years 1995–96 was estimated using the PRMS model. Fourth, the ratio of base flow to total streamflow determined in step 2 was applied to the modeled annual mean flow. Application of the historic relation of annual mean base flow to annual mean streamflow is justified because the ratio of base flow to total streamflow is generally linear throughout the period of record. Figure 9 shows this relation for the Calapooia River at Holley (station 14172000) indicating a strong correlation, with an r^2 of 0.94.

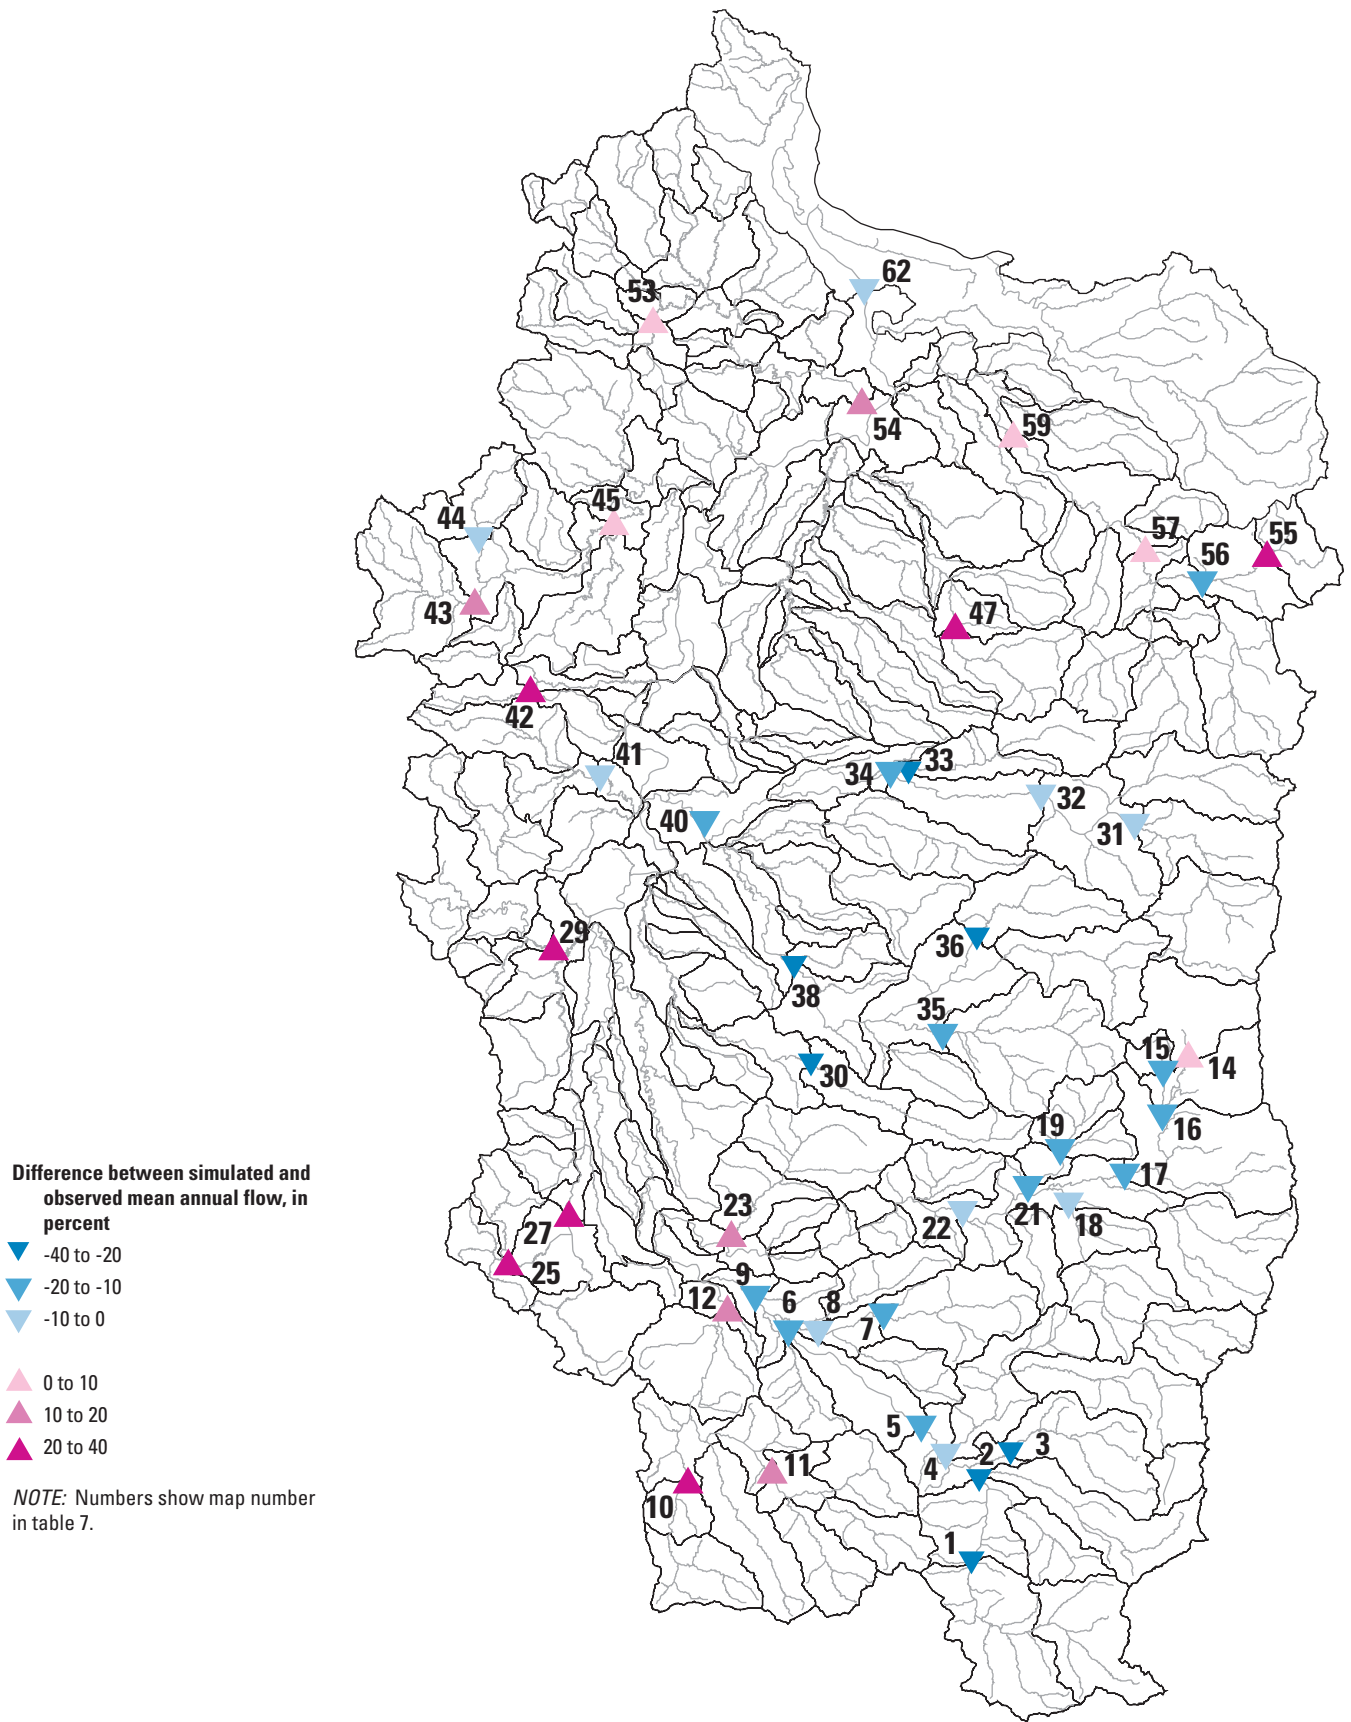


Figure 7. Difference in mean annual observed and simulated flow at selected gages throughout the Willamette River Basin, Oregon, 1973–96.

Table 7. Comparison of observed and simulated mean annual flow at selected sites in the Willamette River Basin, Oregon[ft³/s, cubic feet per second, map numbers refer to figure 7]

Map number	Station name	Station number	Period of record	Mean annual observed flow (ft ³ /s)	Mean annual simulated flow (ft ³ /s)	Difference ¹
1	Middle Fork Willamette River near Oakridge	14144800	1973–96	786	550	-30.0
2	Middle Fork Willamette River above Salt Creek, near Oakridge	14145500	1973–96	1,119	805	-28.1
3	Salmon Creek near Oakridge	14146500	² 1973–93	417	330	-20.9
4	North Fork of Middle Fork Willamette River near Oakridge	14147500	² 1973–94	741	734	-.94
5	Middle Fork Willamette River below N. Fork, near Oakridge	14148000	1973–96	2,764	2,285	-17.3
6	Middle Fork Willamette River near Dexter	14150000	1973–96	2,920	2,449	-16.1
7	Fall Creek near Lowell	14150300	1973–96	395	343	-13.2
8	Fall Creek below Winberry Creek near Fall Creek	14151000	1973–96	553	523	-5.42
9	Middle Fork Willamette River at Jasper	14152000	1973–96	3,945	3,330	-15.6
10	Coast Fork Willamette River below Cottage Grove Dam	14153500	1973–96	237	297	25.3
11	Row River above Pitcher Creek near, Dorena	14154500	1973–96	571	658	15.2
12	Coast Fork Willamette River near Goshen	14157500	1973–96	1,441	1,629	13.0
14	McKenzie River at Outlet of Clear Lake	14158500	1973–96	423	427	.95
15	Smith River above Smith River Reservoir near Belknap Springs	14158790	1973–96	86	74	-14.0
16	McKenzie River below Trail Bridge Dam near Belknap Springs	14158850	1973–96	973	794	-18.4
17	McKenzie River at McKenzie Bridge	14159000	1973–94	1,646	1,453	-11.7
18	South Fork McKenzie River near Rainbow	14159500	1973–96	790	761	-3.67
19	Blue River below Tidbits Creek near Blue River	14161100	1973–96	240	198	-17.5
20	Lookout Creek near Blue River	14161500	1973–96	114	108	-5.26
21	Blue River at Blue River	14162200	1973–96	437	366	-16.2
22	McKenzie River near Vida	14162500	1973–96	3,972	3,673	-7.53
23	Mohawk River near Springfield	14165000	1973–96	491	558	13.6
25	Long Tom River near Noti	14166500	1973–96	205	279	36.1
27	Long Tom River near Alvadore	14169000	1973–96	463	639	38.0
29	Marys River near Philomath	14171000	1973–85	433	558	28.9
30	Calapooia River at Holley	14172000	1973–90	398	283	-28.9
31	North Santiam River below Boulder Creek near Detroit	14178000	1973–96	974	903	-7.29
32	North Santiam River at Niagara	14181500	1973–96	2,219	2,019	-9.01
33	Little North Santiam River near Mehama	14182500	1973–96	703	541	-23.0
34	North Santiam River at Mehama	14183000	1973–96	3,294	2,914	-11.5
35	South Santiam River Below Cascadia	14185000	1973–96	782	703	-10.1
36	Quartzville Creek near Cascadia	14185900	1973–96	637	421	-33.9
38	South Santiam River at Waterloo	14187500	1973–96	2,895	2,274	-21.5

Table 7. Comparison of observed and simulated mean annual flow at selected sites in the Willamette River Basin, Oregon—Continued
[ft³/s, cubic feet per second, map numbers refer to figure 7]

Map number	Station name	Station number	Period of record	Mean annual observed flow (ft ³ /s)	Mean annual simulated flow (ft ³ /s)	Difference ¹
40	Santiam River at Jefferson	14189000	1973–96	7,421	6,526	-12.1
41	Luckiamute River near Suver	14190500	1973–96	806	739	-8.31
42	Rickreall Creek near Dallas	14190700	1973–78	143	173	21.0
43	South Yamhill River near Willamina	14192500	1973–93	556	632	13.7
44	Willamina Creek near Willamina	14193000	1973–91	242	225	-7.02
45	South Yamhill River near Whiteson	14194000	1973–91	1,577	1,597	1.27
47	Molalla River above Pine Creek near Wilhoit	14198500	1973–93	496	670	35.1
53	Tualatin River near Dilley	14203500	1973–96	358	383	6.98
54	Tualatin River at West Linn	14207500	1973–96	1,403	1,571	12.0
55	Oak Grove Fork near Government Camp	14208700	1973–96	134	167	24.6
56	Oak Grove Fork above Powerplant Intake	14209000	1973–95	461	400	-13.2
57	Clackamas River above Three Lynx Creek	14209500	1973–96	1,939	1,958	0.98
59	Clackamas River at Estacada	14210000	1973–96	2,712	2,855	5.27
62	Willamette River at Portland	14211720	1973–94	31,370	31,280	-0.29

¹Difference shown in percent = 100 × ([mean annual simulated flow - mean annual observed flow]/mean annual observed flow).

²Observed flow data for water year 1986 was missing.

Regulated Streams

Direct base-flow estimates cannot be made on streams in which the flow is regulated by dams or diversion. Flow regulation disrupts normal hydrograph recession curves, which negates their use for base-flow separation analysis. Low flows in regulated streams are augmented by reservoir releases in the summer. Peak flows are reduced through storage, followed by attenuated releases of stored water behind the dams.

Base-flow estimates could be made, however, for streams that were regulated during water years 1995–96 but that had a sufficient unregulated period prior to impoundment to determine the relation of annual base flow to annual streamflow. As described for discontinued unregulated streams, the relation between base flow and streamflow during the unregulated periods was determined, and this ratio was applied to the recorded annual mean streamflow for water years 1995–96.

Accuracy

Accuracy of the base-flow estimate at each site depends on the available streamflow record and whether the flow is regulated or unregulated. The most

accurate base-flow estimates are for the unregulated streamflow-gaging stations that were in operation during 1995 and 1996. The base-flow estimates for regulated streams are less accurate because (1) the relation developed between base flow and streamflow was for a prior period, and (2) reservoir storage changes may affect base-flow estimates. Base-flow estimates for discontinued streamflow-gaging stations are probably the least accurate because annual flows for 1995 and 1996 were simulated.

Stream Gain-Loss Field Investigations

Stream gain-loss measurements were used to aid in the understanding of ground-water/surface-water interaction in the study area. These measurements, also called seepage measurements, are made at several locations along a stream reach and allow identification of reaches where water is flowing in to or flowing out from the stream through the streambed. Seepage measurements made in the Willamette River Basin consisted of a synoptic inventory of stream discharge, tributary inflow and out-of-stream withdrawals. An increase in

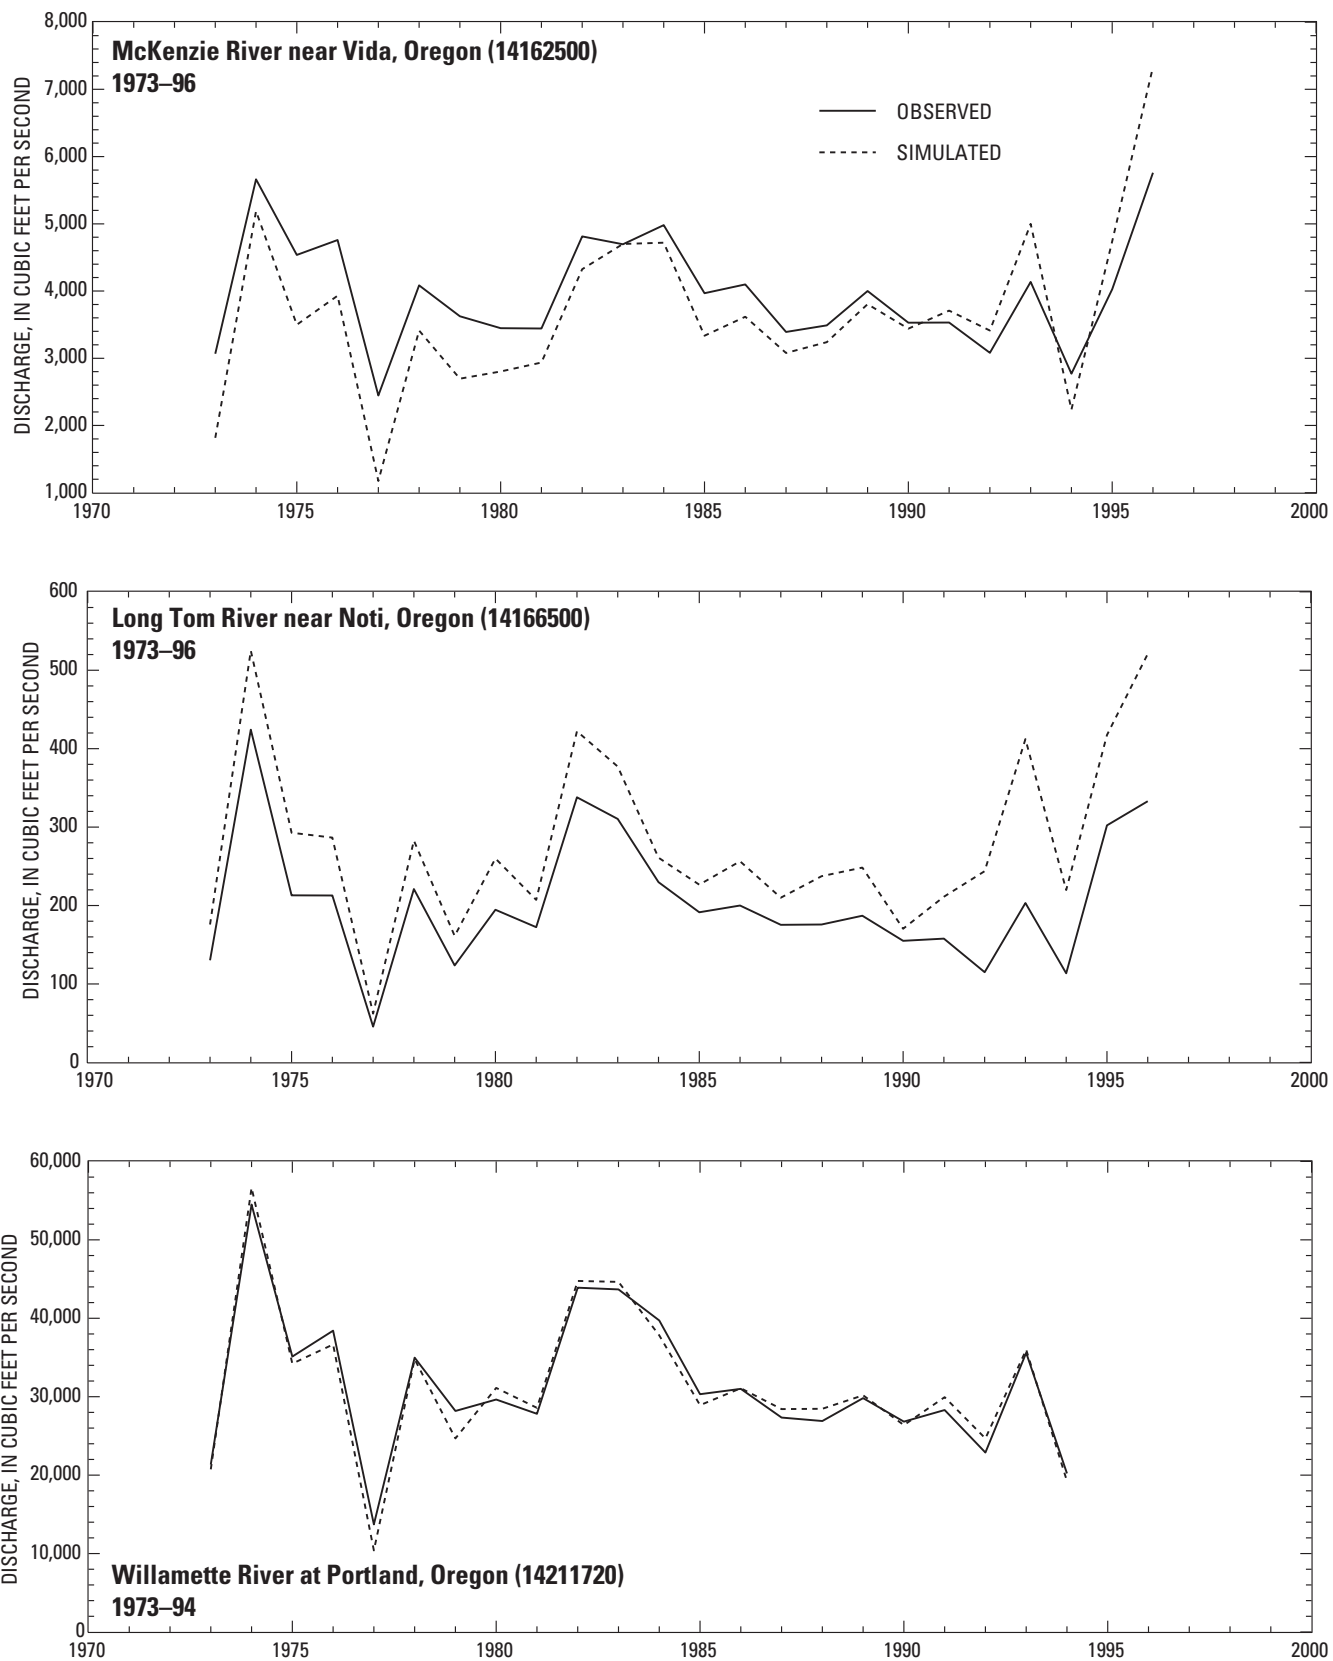


Figure 8. Annual mean observed and simulated discharge for three sites in the Willamette River Basin, Oregon.

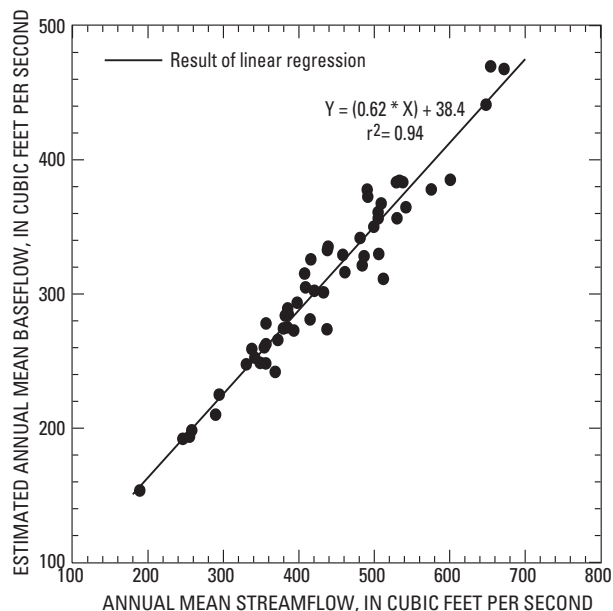


Figure 9. Relation of annual mean streamflow to estimated annual mean base flow at Calapooia River at Holley, Oregon (14172000), for water years 1936–90.

stream discharge at the downstream point in a stream reach not accounted for by tributary inflow was attributed to discharge into the stream from the ground-water system. Likewise, a net decrease in streamflow at the downstream location was attributed to a loss from the stream to the ground-water system.

Streamflow at each location was measured directly or determined from a stage-discharge rating curve at a streamflow-gaging station. Measurements were made using either an Acoustic Doppler Current Profiler (ADCP) or a vertical-axis mechanical current meter. All Middle Fork Willamette River and Willamette River measurements were made using the ADCP following methods described in Simpson and Oltmann (1993). The remainder of the streamflow measurements were made using a current meter by wading, boat, or bridge, as described by Rantz (1982). Where streamflow-gaging stations were used as measurement locations, the stage-discharge rating curve along with applicable corrections were used to determine the discharge at the time of the study.

Out-of-stream withdrawals were estimated by noting the location, intake size, lift and horsepower of pumps that were identified along the stream reach. These data were used to estimate pumpage rates. It was assumed that pumps found running continued to run

throughout the period of gain-loss measurements, likewise, idle pumps were assumed to remain off.

Stream reaches and measurement locations within each reach were selected on the basis of several criteria. For streams that were measured in previous gain-loss investigations, the same measurement locations were selected for this investigation. Stream reaches were chosen to avoid confluence with major tributaries to minimize measurement uncertainty. Tributary measurements were made as close to the mouth as possible.

The accuracy of a gain-loss investigation is limited by several factors. These factors include temporal and spatial variation in streamflow, changes in out-of-stream withdrawals, and accuracy of stream-discharge measurements. Ideally, gain-loss measurements are made during a period of steady flow (no temporal changes). Where available, nearby stream gages were checked during each set of measurements to identify changes in discharge. If no gage was nearby, reference marks were established to determine change in water level. Changes in discharge could be estimated with known water-level change, channel width and velocity estimates. Discharge can vary due to changes in runoff from precipitation, and in regulated streams, due to changes in reservoir regulation. These effects were minimized by measuring discharge in each stream reach during dry weather, and over a short time period, usually 1 day. Changes in out-of-stream withdrawals can affect the accuracy of the overall measurement, although in this study withdrawals were small compared to the total flow in each stream reach. The accuracy of discharge measurements, which depends on the conditions under which the measurement was made as well as the equipment used, was estimated to be 5 percent for current-meter measurements, and 3 percent for ADCP measurements.

Gains or losses must be greater in magnitude than the uncertainty associated with the measurement to be significant. Careful consideration should be given to the expected gains and losses in the stream relative to the measurement uncertainty. Because the uncertainty is calculated as a percentage of the streamflow, smaller gains or losses can be identified in small streams than in large streams. For example, for a measurement of 10,000 ft³/s (cubic feet per second) with an estimated measurement uncertainty of 3 percent, the actual discharge is between 9,700 and 10,300 ft³/s. Discharge at the next location downstream would have to be at least 10,600 ft³/s (with the actual discharge between 10,300

and 10,900 ft³/s) to indicate a gain greater than the measurement uncertainty. In a stream with a discharge of 1,000 ft³/s, the additional discharge needed to confirm a gain greater than the measurement uncertainty would be only 60 ft³/s.

RESULTS

The following three sections describe the estimates of ground-water recharge, base flow, and stream-reach gains and losses.

Ground-Water Recharge Estimates

Two methods were used to estimate recharge. Continuous simulations using PRMS were made for the 216 subbasins that compose the study area of the Willamette River Basin for water year 1973–96. Output from the simulations included daily ground-water recharge from every HRU. Recharge for water years 1995–96 was estimated based on daily streamflow records using RECESS and RORA programs. Recharge estimates were also compared to estimates made for the lower elevation region of the Willamette River Basin in the Willamette Lowland Regional Aquifer-System Analysis study (Woodward and others, 1998).

Recharge Estimates From Precipitation-Runoff Model

The simulations were run on a 24-hour time step; however, the output was reduced to annual values for the analyses of the study. Simulation results for each of the 216 subbasins are shown in figure 10 as mean annual values.

These maps show an approximation of the water budget terms for each of the 216 subbasins in the Willamette River Basin.

The water budget in these subbasins can be described by the equation:

$$P - (I + AET + TF) = 0 \quad (3)$$

where

P is precipitation,

I is interception loss from vegetation,

AET is actual evapotranspiration loss from the soil zone, and

TF is total flow at each basin outlet. (In this equation, recharge [identical to base flow when basin-averaged] is included in TF).

Precipitation.—The simulated mean annual precipitation of the subbasins (fig. 10) is for the 24-year period from 1973–96. PRMS simulates precipitation for each HRU as a function of the observed daily precipitation gage data times the HRU precipitation weight. The precipitation estimates shown in the figure are for each entire subbasin. That value is the area weighted mean of the precipitation of the HRUs in the subbasin. As expected, the precipitation levels correspond well spatially with the precipitation levels shown in the PRISM-derived map of the study area (fig. 4), because the HRU precipitation weights were based on PRISM data. Precipitation is highest at the higher regions of the Coast Range and Cascade Range and lower in the valleys. However, these precipitation levels are lower overall than the PRISM precipitation levels because the PRMS simulation period (1973–96) was drier than the period of record used to develop the PRISM map (1961–90). The basin precipitation estimates are also the sum of both precipitation on all HRUs and summer irrigation applications to some HRUs that were designated as having irrigated agriculture. The HRUs with irrigation are all in subbasins located in the lowlands and did not encompass the entire surface area of these subbasins.

Interception.—Mean annual interception losses, based on water years 1973–96 simulation period, are shown in figure 10. Interception of precipitation is computed as a function of the cover density and canopy storage of the predominant vegetation in the HRU. As expected, interception is greatest in areas of the Cascade Range, where precipitation is high and vegetation is primarily thick forest. Interception decreases closer to the divide of the Cascades, where the forest becomes thinner and there are more open areas—glaciers and lava beds. Interception is least on the valley floor, where the vegetation is mostly crops (containing less canopy storage) and the precipitation levels are less.

Evapotranspiration.—The computation of potential evapotranspiration (PET) is a function of the air temperature input data and possible hours of sunshine. The higher evapotranspiration rates are generally inversely related to elevation. The highest PET losses are located in the valley lowlands (fig. 10), which also have the highest mean air temperatures in the basin. PET losses in the Willamette River Basin spatially coincide well with the spatial distribution of published evaporation rates (Farnsworth and Peck, 1982).






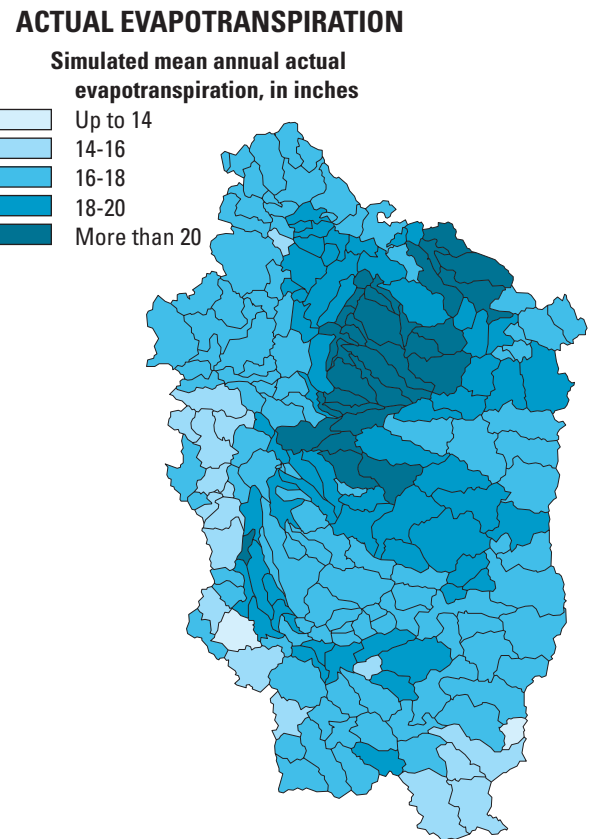


Figure 10. Model simulation results for hydrologic parameters in the Willamette River Basin, Oregon, 1973–96.



RATIO OF SIMULATED MEAN ANNUAL EVAPOTRANSPIRATION TO PRECIPITATION

Ratio of simulated mean actual evapotranspiration
to precipitation, in percent

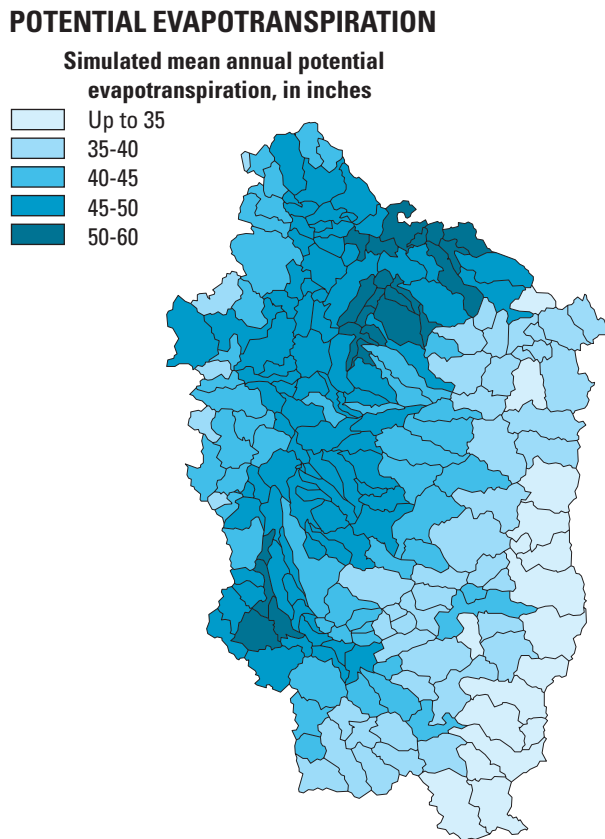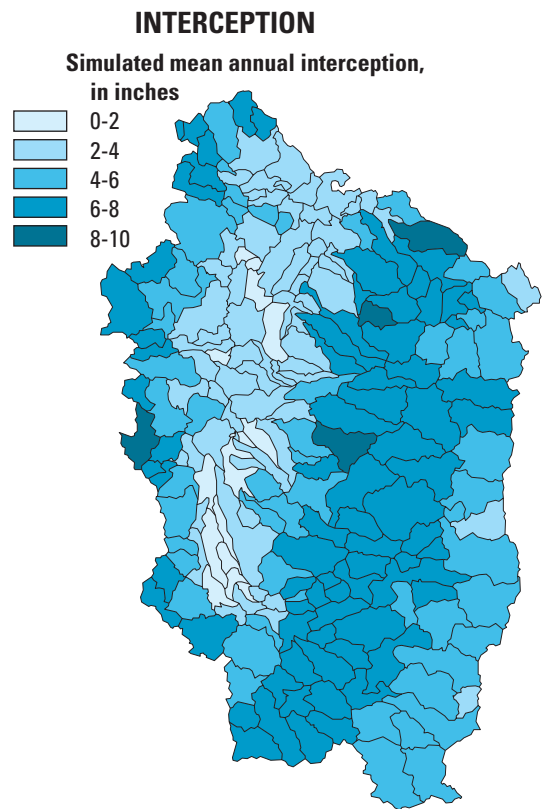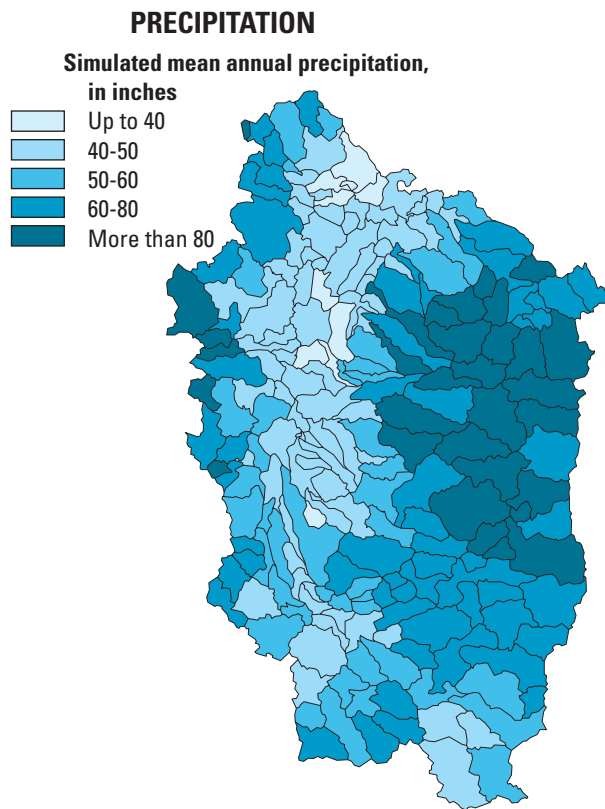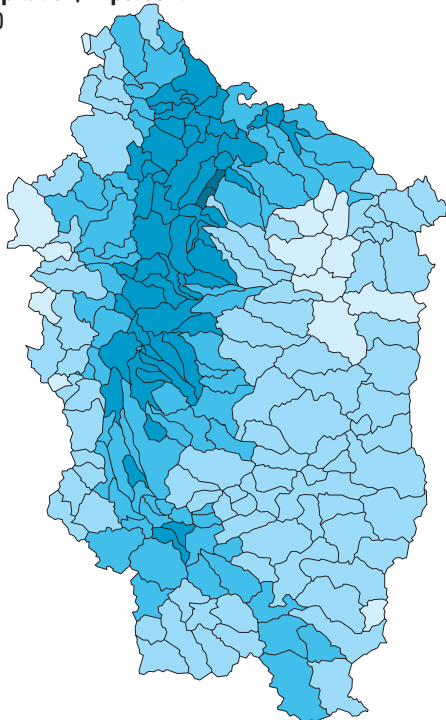



RECHARGE

Simulated mean annual recharge,
in inches

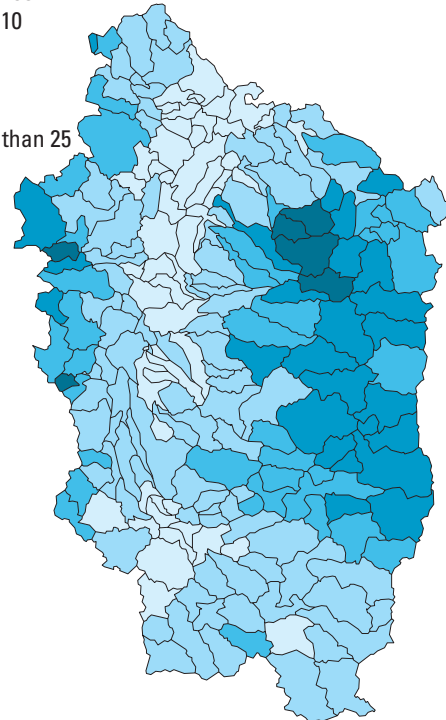



TOTAL FLOW

Simulated mean annual total flow,
in inches

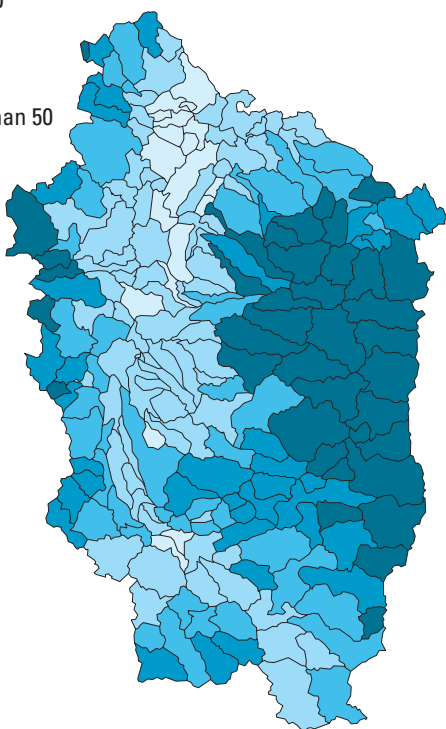

RATIO OF MEAN ANNUAL ACTUAL RECHARGE TO TOTAL FLOW

Ratio of simulated mean annual recharge
to total flow, in percent

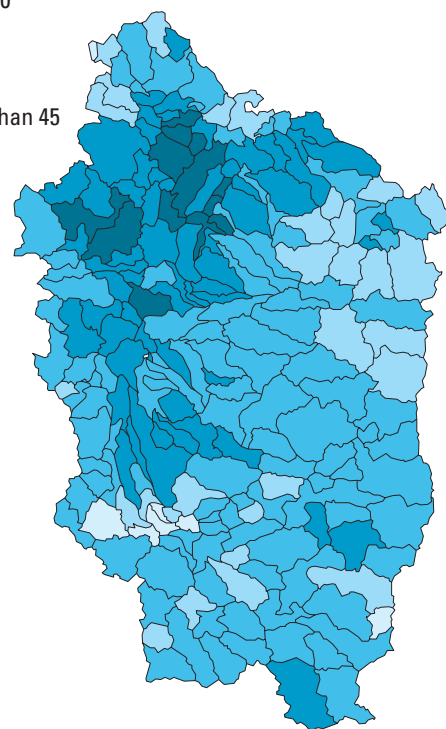

Actual evapotranspiration (AET) is the computed rate of water loss, which reflects the availability of water to satisfy PET. In the model, AET losses do not include interception losses. When available water is nonlimiting, AET equals PET. In addition to precipitation levels, AET is also a function of soil depth and soil type. For two locations with the same water availability, PRMS will compute a higher AET rate for a location with sandy soils than for one with clay soils. In the Willamette River Basin, the regions showing the highest AET losses are in the Clackamas and Molalla subbasins (fig. 10). These regions had a combination of high PET and precipitation levels.

In the valley lowlands, where mean annual precipitation is lower and PET is higher than in other regions of the Willamette River Basin, the percent ratio of AET to precipitation is greatest (fig. 10). Evapotranspiration losses are a more dominant component of the water budget in this region than in the cooler and wetter high elevation regions.

Although evapotranspiration is a significant component of the water budget in the Willamette River Basin, few studies have estimated evapotranspiration losses specifically in the Willamette River Basin. Studies using data from the H.J. Andrews Experimental Forest (40 miles east of Eugene) and the Cedar River watershed (40 miles southeast of Seattle) have estimated the sum of interception and evapotranspiration losses from 21 to 29 in/yr. (Rothacher and others, 1967; Waring and Schlesinger, 1985; and Fritschen and others, 1977). These estimates appear comparable to the sum of PRMS simulated interception and AET.

Recharge.—Simulated mean annual ground-water recharge is shown in figure 10, and in Appendix 1 for selected streamflow-gaging-station locations. The pattern of recharge throughout the basin appears to closely correspond with precipitation. Recharge is greater in the Coast Range and Cascade Range, and lower in the valley lowlands.

Total flow.—Mean annual total flow (TF) for each of the basins is shown in figure 10. Total flow is for each basin and is not equivalent to streamflow because total flow from upstream basins is not included. Total flow from a PRMS basin model is the sum of flows from the surface, subsurface, and ground-water (or base flow) conceptual reservoirs flowing to the basin outlet. Total flow estimates have a close spatial correspondence to precipitation.

The percent of mean annual total flow that is recharge (or base flow) is shown in figure 10. (Mean

annual base flow is identical to mean annual recharge in PRMS when subbasin-averaged.) Recharge (or base flow) contributes approximately 22 to 49 percent of mean annual total flow in the subbasins. The subbasins containing Portland, Salem, and Eugene had a low percentage of base flow to total flow ratio because of more impervious land surfaces in those subbasins. Also, subbasins containing lakes or impoundments, such as Waldo Lake and Fern Ridge Reservoir, had a low percentage of base flow to total flow ratio, because PRMS treats water surfaces as impervious.


Recharge Estimates from Daily Streamflow Records

Estimates of ground-water recharge were made using daily streamflow records for water years 1995–96 at 16 streamflow-gaging stations. The program RECESS used to develop the master recession curve at each location was based on the winter months (January through March) for the entire period of record for each site. The master recession curve for each site was based on an average of 15 recession periods. Drainage area size ranged from 16.9 to 479 square miles, with an average basin size of 144 square miles. Recharge estimates using RORA for water year 1995 ranged from 30 to 67 inches, whereas recharge for water year 1996 ranged from 36 to 96 inches (Appendix 1). Recharge was typically higher in locations in the Cascade Range and lower in the valley areas, corresponding to general distribution of rainfall in the basin. Recharge in water year 1996 was greater than in water year 1995 due to higher precipitation throughout the Willamette Basin.

Recharge Estimates from Willamette Lowland Regional Aquifer-System Analysis


Estimates of ground-water recharge were made for the lower elevation region of the Willamette River Basin in the Willamette Lowland Regional Aquifer-System Analysis (RASA) study (Woodward and others, 1998). Estimated mean annual recharge and the extent of the study-area boundaries for that study are shown in figure 11. To estimate recharge, Woodward and others (1998) defined four classes of surficial hydrogeologic units: (1) modern floodplain deposits, mainly of the Willamette aquifer, (2) the remaining part of the Willamette aquifer, the Willamette Silt unit, and the Willamette confining unit, (3) the Columbia River basalt aquifer and Boring Lava, and (4) the basement confining unit (table 8). For the Willamette

Precipitation-Runoff Modeling System simulated recharge, 1973-96

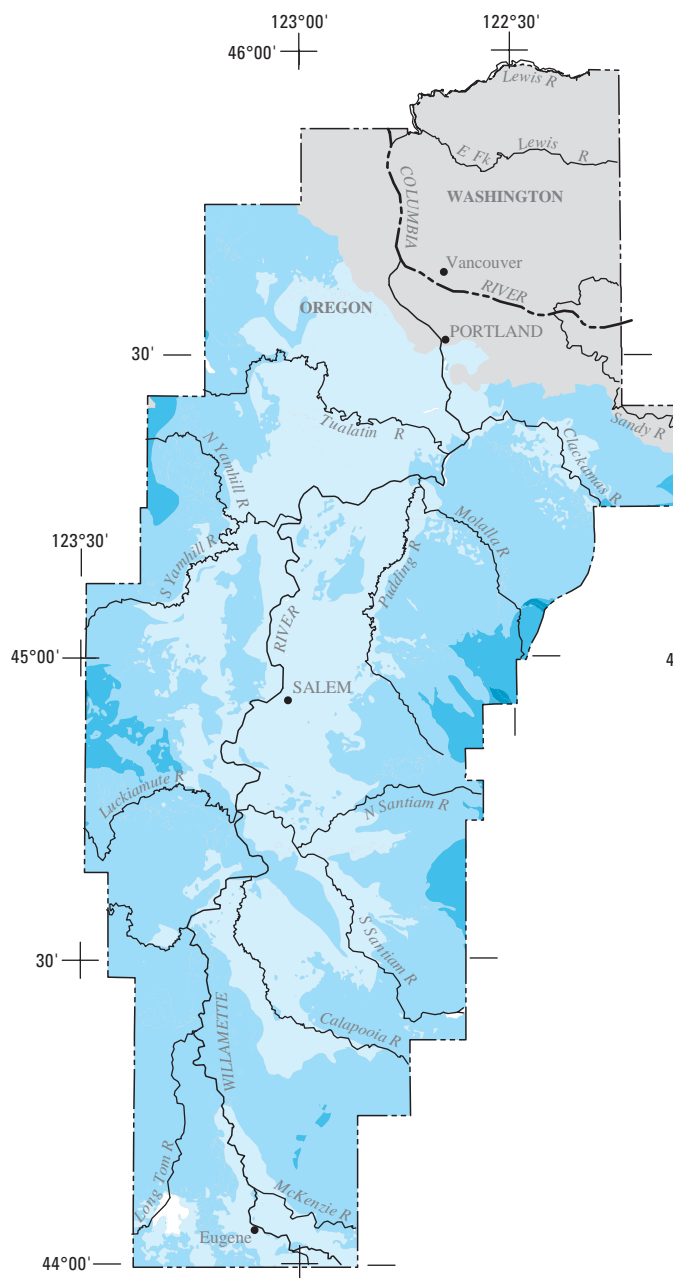


EXPLANATION

Mean annual recharge, in inches



(Areas in white contain no data.)

Willamette Lowland Aquifer System estimated recharge

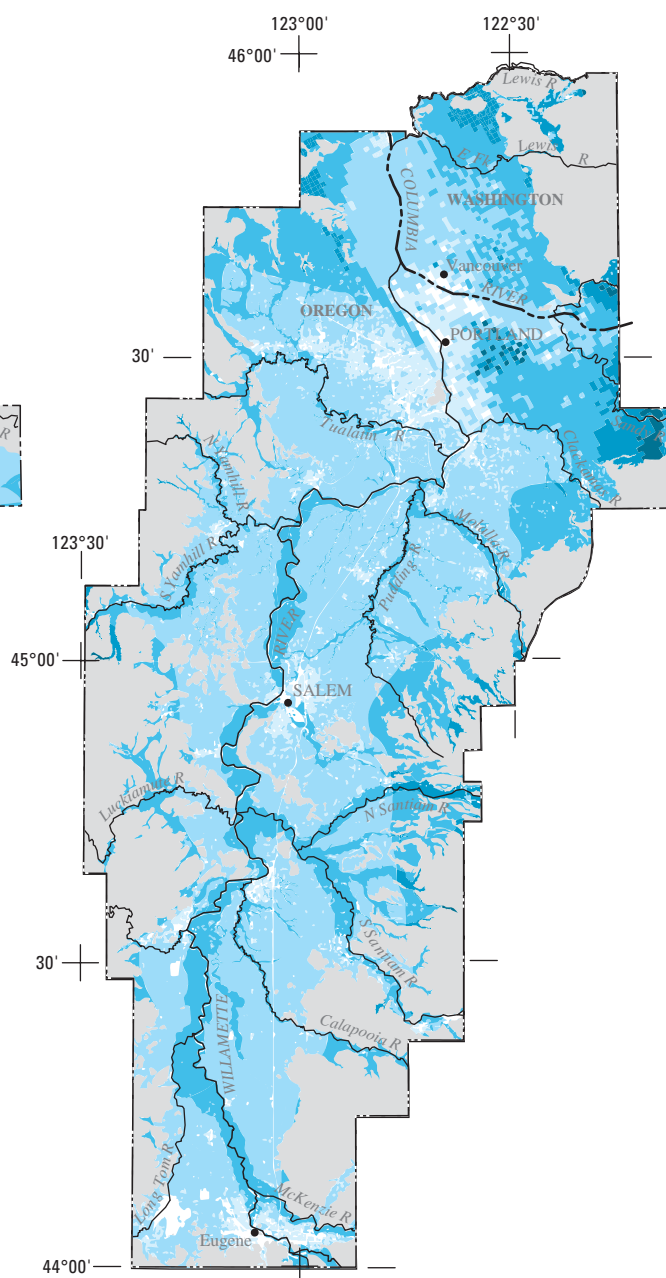

From Woodward and others, 1996




Figure 11. Comparison of Precipitation-Runoff Modeling System simulated mean annual recharge and Willamette Lowland Aquifer estimated mean annual recharge.

Table 8. Estimates of mean annual recharge on the basis of mean annual precipitation, generalized surficial geology, and land-use and land-cover categories from the Willamette Lowland Regional Aquifer System Analysis

[mi², square miles; in/yr, inches per year; ft³/s, cubic feet per second; Source: Woodward and others, 1998, table 11]

Surficial geology ¹	Land use and land cover	Area (mi ²)	Recharge ^{2,3} (in/yr)	Precipitation (in/yr)
Floodplain deposits of the Willamette aquifer	Undeveloped and nonbuilt-up	641	24.1	44.2
	Residential	13	12.7	43.3
	Built-up	35	13.3	45.0
	Urban	99	8.1	43.7
	All categories	788	21.4	44.2
Willamette aquifer (excluding floodplain deposits), Willamette Silt unit, and the Willamette confining unit	Undeveloped and nonbuilt-up	1,833	19.7	46.0
	Residential		28	14.1
	built-up	352	14.5	46.3
	Urban	103	3.6	43.8
	All categories	2,316	18.1	45.9
Columbia River basalt aquifer and Boring Lava	Undeveloped and nonbuilt-up	650	22.0	51.8
	Residential	5	12.6	44.6
	built-up	76	11.5	46.0
	Urban	9	3.1	44.3
	All categories	740	20.7	51.1
Subtotal		3,844	19.3	46.6
Basement confining unit	Undeveloped and nonbuilt-up	1,780		60.0
	Residential	3		47.2
	built-up	48		52.5
	Urban	4		48.6
	All categories	1,835		60.4
Total		5,679	19.7	51.1

¹Includes small discontinuous areas that were not included as part of the regional hydrogeologic units.

²Includes estimates derived by Snyder and others (1994) for the Portland Basin.

³Recharge not estimated for basement confining unit or areas covered by large surface-water bodies

aquifer units, estimates of recharge as a percentage of mean annual precipitation (58 percent in the modern floodplain deposit part and 42 percent in the remaining parts of the Willamette aquifer) were obtained from earlier USGS investigations in the Willamette Lowlands. These studies included the Portland Basin (Snyder and others, 1994), the Tualatin Basin (Hart and Newcomb, 1965), the French Prairie area (Price, 1967), the Molalla-Salem Slope area (Hampton, 1972), the Dallas-Monmouth area (Gonthier, 1983), the Corvallis-Albany area (Frank, 1974), the Harrisburg-Halsey area (Frank, 1976), the Eugene-Springfield area (Frank, 1973), and the Salem Hills area (Foxworthy, 1970). Woodward and others (1998) then computed recharge using the above percentages and an areal distribution of the mean

annual precipitation. To estimate recharge in the Columbia River basalt aquifer and Boring Lava units, a regression equation developed by Bauer and Vaccaro (1990) was used relating mean annual precipitation to recharge in the Columbia River Basalt Group. No estimates of recharge were made for the basement confining unit and areas covered by large water bodies. (These are areas shown in white in figure 11.) All the recharge estimates were further modified to account for impervious surface conditions. Recharge was reduced from 50 to 100 percent in urban, built-up, and residential areas. For the Portland Basin area, Woodward and others (1998) used recharge estimates previously determined by Snyder and others, 1994.

Comparison of Recharge Estimates

Recharge estimates from PRMS were compared to RORA for water years 1995–96 and are shown in Appendix 1. Recharge estimated by RORA is two to three times greater than the PRMS estimates. This may be attributed to a fundamental difference in the definition of recharge. RORA derives recharge from each individual peak in streamflow. The method that PRMS uses to define recharge in its algorithm is relatively conservative. PRMS recharge does not include subsurface flow from storms. Subsurface flow can sometimes be considered the lateral flow to a basin outlet between the ground surface and the aquifer water table. Recharge estimated by PRMS represents waters with a longer residence time in the aquifers that are less likely to return to the rivers as surface-water flow soon after a storm. The recharge estimates from RORA and PRMS define an upper and lower bound, respectively for input to the ground-water flow model.

Figure 11 shows recharge estimated by Woodward and others (1998) compared to PRMS simulated mean annual recharge at the HRU level. Recharge estimates for the Willamette Lowland region made by Woodward and others (1998) ranged between 1 and 50 inches. Annual mean recharge simulated by PRMS for 1973 to 1996 was generally lower and ranged from 7 to 35 inches. With PRMS, there was a fairly close correspondence of recharge with precipitation patterns and topography (fig. 10). PRMS recharge estimates were higher in the Coast Range and Cascade Mountains and lower on the valley floor. Recharge estimated by PRMS is less than that estimated by RASA (Woodward and others, 1998) because the geologic and soils data, which affect the infiltration rates, were more generalized in the PRMS models developed by Laenen and Risley (1997) than in the RASA study. The PRMS method incorporates precipitation, soils, geology, and land cover of the area into a simulation of recharge. However, it does not make direct assumptions about recharge for areas covered by the modern floodplain. For built-up urban areas, PRMS simulates higher recharge than that estimated by Woodward and others (1998). Woodward and others (1998) reduce recharge by up to 100 percent in residential, built-up, and urban areas. The PRMS recharge estimates are based on a uniform method and could be more applicable to broad regions. The PRMS recharge estimates can be easily upwardly adjusted when they are used as boundary input data to a ground-water model.

Base-Flow Estimates

The base-flow component of streamflow was estimated by using the PRMS model and by base-flow separation. Base flow estimated using PRMS was, by definition, equivalent to recharge. The results of base-flow separation for the 1995–96 period are presented in the following section, as well as estimates of the base-flow component of selected streams for the 1966–96 period. These estimates, in conjunction with independent estimates of base flow from PRMS, will be used as calibration targets in the ground-water flow model for the Willamette River Basin.

Base-Flow-Separation Analysis

Estimates of mean-annual base flow at 52 streamflow-gaging-station locations for water years 1995 and 1996 (Appendix 1) were made using base-flow-separation techniques. Of the streamflow stations analyzed, 19 were unregulated sites operated during water years 1995–96. The regression method was used at 17 discontinued and 16 regulated streamflow-gaging-station locations, using a prior period to determine the relation between base flow and total streamflow. For the 33 sites in which linear regression was used, the average period of record was 35 years and ranged from 13 to 59 years. The average r^2 value for all the streamflow stations using the regression method was 0.94 and ranged from 0.87 to 0.99. The drainage-basin size ranged from 16.2 to 2,030 square miles, with an average of 337 square miles.

The base-flow component of streamflow in the Willamette Basin, during water year 1995, expressed as a percentage of total streamflow, varied throughout the basin (pl. 1). Streams with the highest annual percent base flow were upland streams draining the Cascade Range. The flow in these streams is dominated by ground-water and spring discharge, and stays relatively high through the year relative to peak discharge. Results from several basins indicated a decrease in percent base flow at downstream locations. This can be attributed to a relatively increasing component of surface runoff. This trend was observed in the McKenzie, North Santiam, Clackamas, South Yamhill, and Middle Fork Willamette Rivers. Johnson Creek at Sycamore (station 14211500), located in Portland, had one of the lowest percent-base-flow components of streamflow. This may be attributable to rapid runoff from urban areas of the basin and lack of infiltration of precipitation into the

ground-water system due to extensive impervious land cover.

Base flow for the water year 1995 ([pl. 1, map symbols) at selected unregulated streams was compared to the 1966–96 period (pl. 1, hydrographs) to show temporal variability in the Willamette River Basin and provide context for the 1995–96 results. The stream showing the least temporal variability is the North Santiam River below Boulder Creek near Detroit, Oregon (station 14178000). Streamflow at this site is dominated by ground-water and spring flow and is less affected by annual variation in precipitation than other sites in the Willamette River Basin. Other streams were significantly influenced by climate, as indicated by the percent base flow during particularly wet and dry years. For example, at the Luckiamute River near Suver (station 14190500), the percent base flow during the particularly wet water year 1996 (54.5 inches at Portland [Oregon Climate Service, 2000], compared to the 1966–96 average of 36.5 inches) was 56 percent, whereas during the dry year of 1977 (23.8 inches at Portland), annual streamflow was 78 percent base flow.

Base flow, estimated from base-flow separation, was compared to base-flow estimates from the PRMS model. The base-flow estimates were consistently less

using PRMS (Appendix 1). In addition, there was less variation in the PRMS base-flow estimates. Using PRMS, the base-flow estimates typically ranged from 30 to 50 percent of total streamflow, whereas base-flow-separation estimates ranged from 50 to more than 90 percent. The hydrograph for the Calapooia River at Holley shows this relation, where PRMS base-flow estimates are consistently less than the PART base-flow estimates (fig. 12). The discrepancy in simulated flows in the beginning of the water year is due to some inefficiencies in the way PRMS simulates the transition from dry to wet conditions. The PART base-flow estimates merge with the total flow hydrograph during periods of sustained streamflow recession, while the PRMS base-flow estimate merges with the simulated flow only during the long summer recession period. Results from the two methods of base-flow estimation differ because of a difference in the definition of base flow and may be viewed as describing a range of expected base-flow contribution to streamflow.

Stream Reach Gain/Loss Estimates

Gain-loss measurements were made on the Middle Fork Willamette, Willamette, South Yamhill, Pudding, and South Santiam Rivers to identify changes in stream-

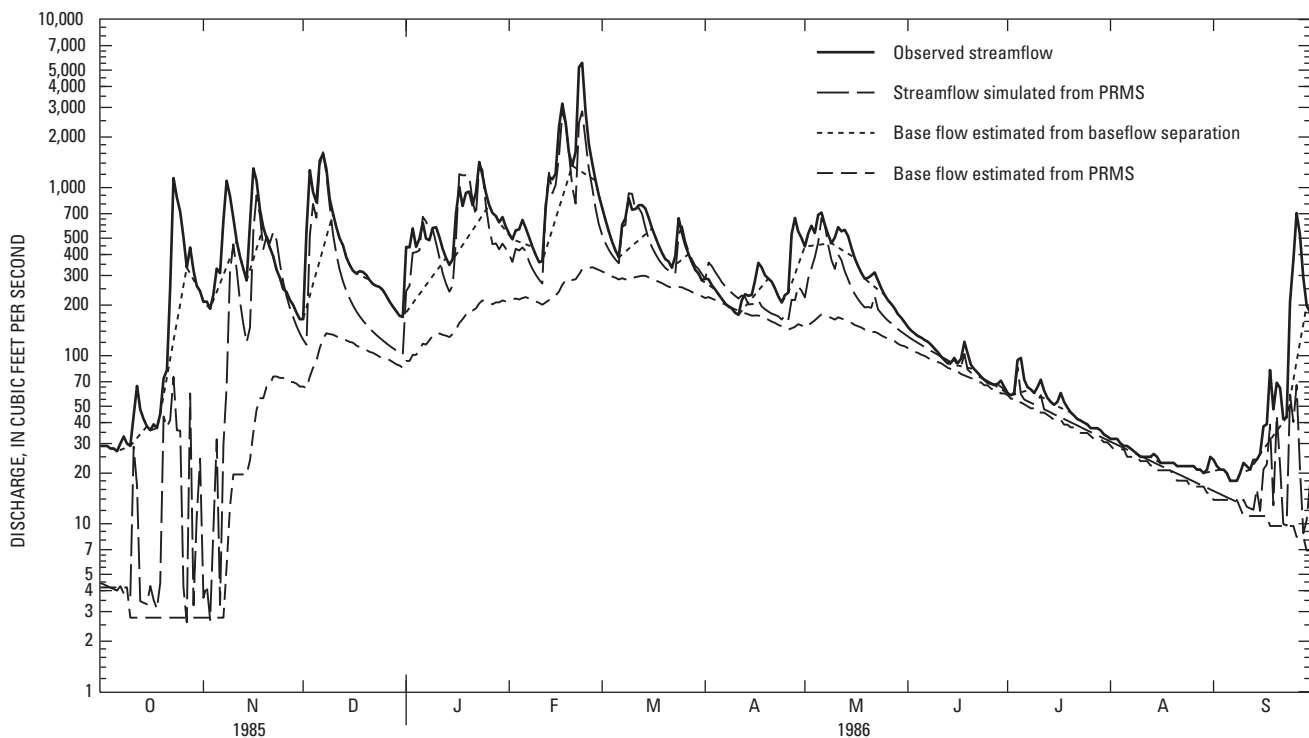


Figure 12. Observed and simulated streamflow, base flow estimated from base-flow separation, and base flow estimated from PRMS on the Calapooia River at Holley, Oregon (14172000). (PART is an automated base-flow-separation program [Rutledge, 1998]; PRMS is the Precipitation-Runoff Modeling System [Leavesley and others, 1983]).

flow caused by ground-water flow to or from streams during spring and summer 1996. The results will provide a comparison to simulated fluxes from a ground-water-flow model. All streamflow measurements were published in Hubbard and others (1996).

Middle Fork and Main-Stem Willamette River

Stream-discharge measurements and water-use inventory were made on the Middle Fork Willamette and Willamette Rivers in five reaches (pl. 1). The reaches ranged from 4.8 to 20 miles in length. The measurements on each reach were completed in a 1-day period. The five reaches extended from Jasper in the southern basin to Wilsonville in the northern part of the basin.

Records of streamflow for USGS stations Middle Fork Willamette River at Jasper (14152000) and the Wil-

lamette River at Harrisburg (14166000), Albany (14174000), and Salem (14191000) were used to identify fluctuations in daily discharge during each series of discharge measurements. With the exception of the Jasper reach during the spring measurement, streamflow on the Willamette River was declining slowly on the days of the measurements. Figure 13 shows the daily flow hydrograph for the Willamette River at Salem; the hydrograph is representative of flow conditions in the stream reaches from Jasper to Wilsonville. Rainfall on April 15–16 caused a significant increase in streamflow. Measurements were resumed in mid-May. For the May and July–August measurements, streamflow records indicated a less than 2-percent change in instantaneous discharge during the day of each gain-loss measurement (unpublished records from the USGS Oregon District). No precipitation was recorded at Salem for at

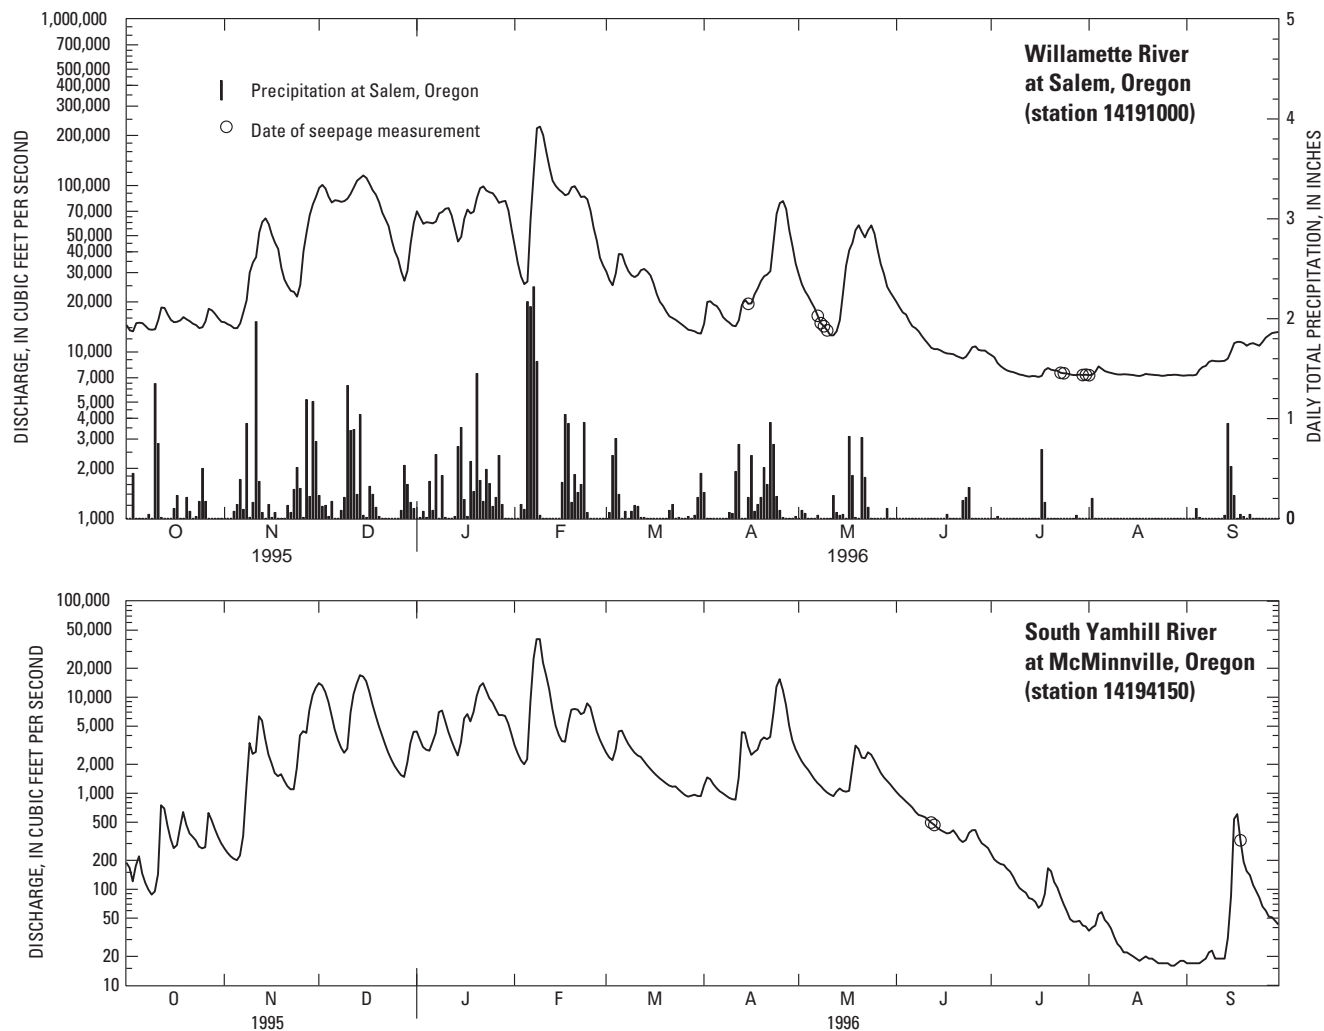


Figure 13. Daily mean discharge for the 1996 water year, discharge at time of seepage measurements, and precipitation at Salem, Oregon.

least 2 days prior to each of the gain-loss measurements. In addition, observations of water-surface elevation in each stream reach indicated minimal change through the day of each set of measurements.

The spring and summer measurements generally represented a range of medium to low streamflow when compared to annual fluctuations. Streamflow during the spring measurements was higher than during the summer, with the exception of the Middle Fork Willamette reach, which was higher in the summer due to reservoir releases upstream. Annual flow duration frequency, which is the percentage of time flow equals or exceeds the measured flow in a year, for the lower four reaches ranged from 50 to 60 percent for the spring measurements and 65 to 85 percent for the summer measurements (Moffatt and others, 1990). Flow duration frequency for the spring and summer measurements on the Jasper reach were 72 and 56 percent, respectively.

A water-use inventory indicated little out-of-stream withdrawal compared to streamflow. The Corvallis to Albany reach had the largest irrigation withdrawal, but the total withdrawal from the stream in this

reach was less than 0.1 percent of the total streamflow and less than 10 percent of calculated gain or loss.

The results of the seepage measurements tabulated in Appendix 2 are shown graphically on figure 14. The uncertainty associated with the streamflow used to calculate gain or loss is represented by the shaded area on the plots. Gains or losses are calculated from the upstream end of each reach. Due to the relatively large streamflow in the Willamette River when compared to the gains and losses observed, many gains and losses were less than the 3 percent uncertainty associated with the measurements. For example, although measurements made in the reach from RM 169.6 to 149.6 in May indicate a gain of 190 ft³/s, the gain is less than the uncertainty of the measurement. However, the gain of 470 ft³/s in the same reach in July is greater than the measurement uncertainty, and is therefore significant.

On the reach from Jasper to Springfield, both the April and July measurements indicated small net losses. The loss of 350 ft³/s from RM 195.0 to RM 192.8 was greater than the measurement uncertainty, as was the gain to the next measurement location downstream (RM 190.5). The results confirm the general trend of net loss

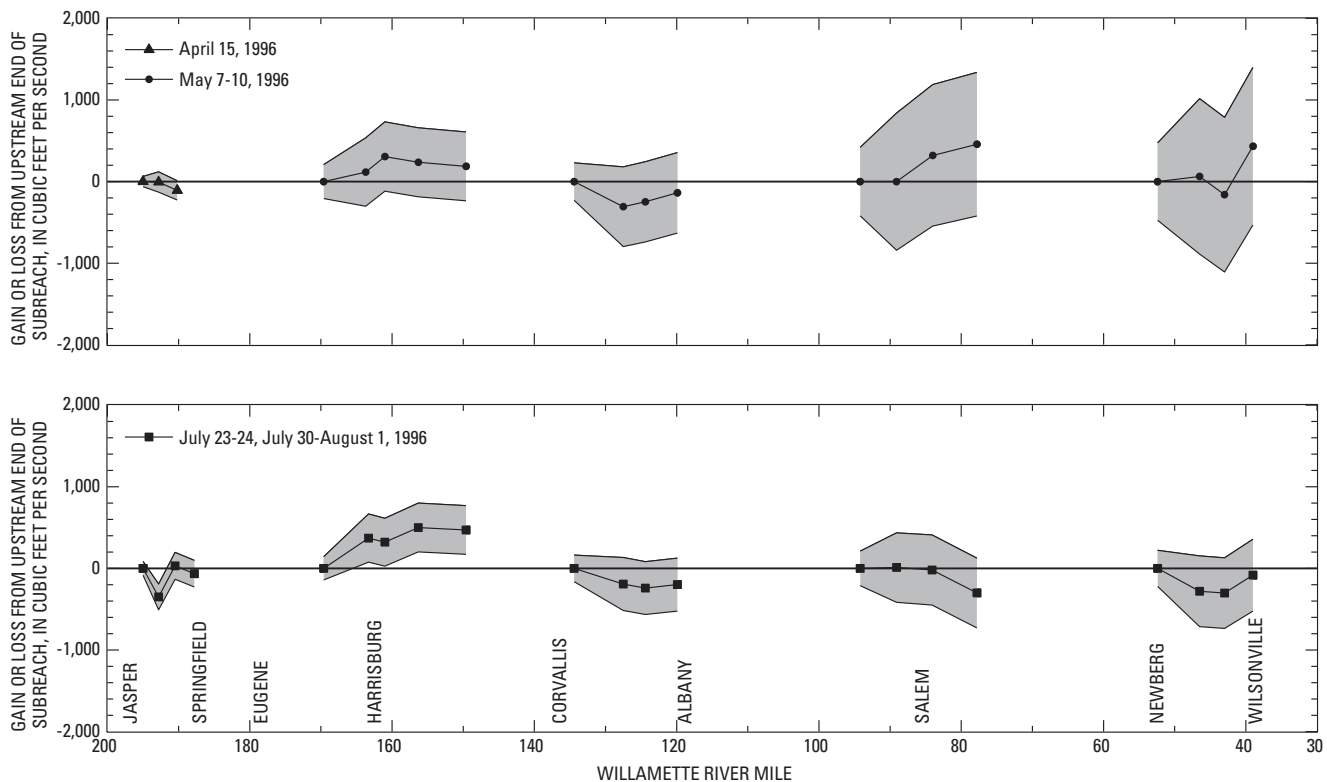


Figure 14. Gains to and losses from selected reaches of the Middle Fork Willamette River from Jasper to Springfield and the Willamette River from Eugene to Wilsonville, Oregon, for the periods April–May and July–August 1996. (Shaded areas represent uncertainty of streamflow measurement of 3 percent.)

in streamflow observed by Laenen and Risley (1997) for studies on similar reaches in August 1992 and June 1993.

From RM 169.6 to 149.6 a significant gain occurred during the July measurements, whereas the May measurements indicated only a slight gain, and less than the measurement uncertainty. This seasonal difference is contrary to a general trend of slight losses found on other stream reaches during the summer. Laenen and Risley (1997) observed larger fluctuations in streamflow between measurement locations in this reach than observed in this study.

Measurements on the lower three reaches generally indicated a seasonal trend, in which gains were less, or losses were greater, in summer than in spring. Fluctuations, however, were less than the measurement uncertainty. The seasonal trend is consistent with the hypothesis that ground-water discharge to the stream is likely greater in spring than summer and is consistent with observations of Laenen and Risley (1997).

South Yamhill River

Streamflow on the South Yamhill River was measured in one reach, from Sheridan, at RM 37.7, to McMinnville, at RM 5.6 (pl. 1). Two sets of measurements were made: June 12–13, 1996, and September 18–19, 1996 (Appendix 2). Tributary flow was measured at Deer Creek, Salt Creek, and Cozine Creek, as well as several unnamed tributaries.

A detailed water-use inventory was made on the June study. The entire reach was inventoried by canoe, and several small irrigation withdrawals were identified. The largest single withdrawal was 0.4 ft³/s, less than 0.2 percent of streamflow and less than 5 percent of the calculated gain. A water-use inventory was not done for the September study; however, the measurements were made after the end of the irrigation season, and no irrigation was observed in the area.

Records from the streamflow-gaging station at McMinnville (14194150) were used to identify changes in discharge during the study. Discharge was fairly constant on the day of the June measurements and decreased by about 6 percent from June 12 to 13 (fig. 13). The flow duration frequency, based on the relation developed for the discontinued station South Yamhill River near Whiteson (14194000), was 55 percent (Moffatt and others, 1990). Weather records indicated no significant precipitation for about 4 weeks prior the June measurements (fig. 13). Discharge decreased significantly during the September measurement, resulting

from rainfall several days prior. Daily discharge at McMinnville decreased by about 40 percent from September 18 to 19, although less than 5 percent between the measurements made on September 18 at RM 37.7 and RM 26.9. The flow-duration frequency for September 18 was 60 percent. The rapid change in discharge from September 18 to 19 precluded use of the second day's measurements for calculation of seepage.

The June measurements indicated a gain in streamflow from RM 37.7 to RM 5.6 (fig. 15). The gain was significant with the exception of the slight gain measured at RM 26.9, which was less than the measurement uncertainty. The magnitude of the gain increased in the downstream direction. The September measurements indicated little change from RM 37.7 to RM 26.9.

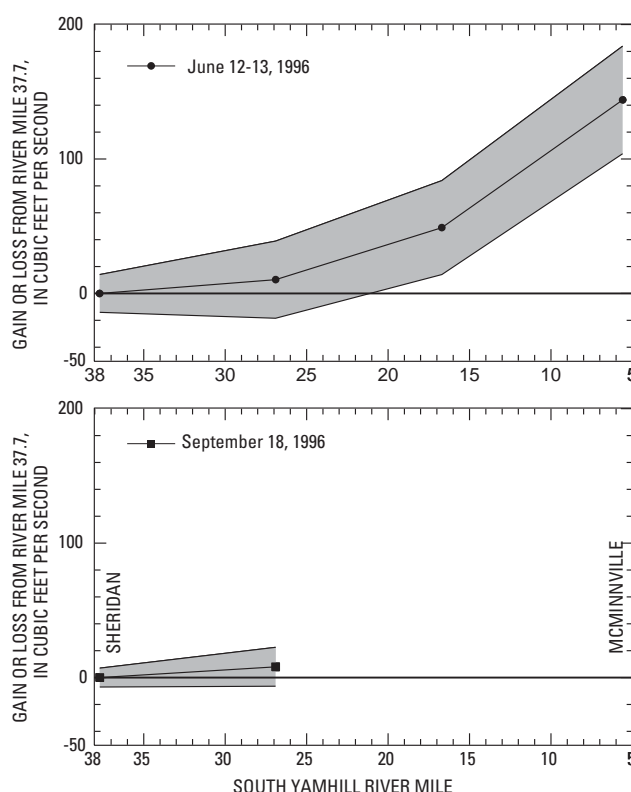


Figure 15. Gains to and losses from selected reaches of the South Yamhill River from Sheridan to McMinnville, Oregon, for June and September 1996. (Shaded areas represent uncertainty of streamflow measurements of 5 percent).

Pudding River

Streamflow on the Pudding River was measured in two reaches, from RM 49.7 to RM 40.7 and from RM 26.8 to RM 8.1 (pl. 1). Measurements were made on May 2–3, 1996, and September 24–25, 1996 (Appendix 2). Discharge at RM 8.1 was derived from streamflow-

gaging-station records at Aurora (14202000) in lieu of direct measurement.

Tributary measurements were made on Silver Creek, Abiqua Creek, and Butte Creek. Streamflow was estimated for Silver Creek during the May study and for Rock Creek during the May and September studies. Water-use observations made prior to both measurement periods indicated no surface-water withdrawals; however, no detailed inventory was done due to lack of boat access and hazards from logjams. The May measurements were made prior to the irrigation season, and by the September measurement, most crops were harvested and no irrigation was occurring.

Records from the gaging station at Aurora (fig. 16) indicated that streamflow was receding both during the May and September measurements. From May 2–3, daily discharge at Aurora decreased by 9 percent; how-

ever, discharge during the part of each day when measurements were made decreased no more than 2 percent. From September 24 to 25, daily discharge at Aurora decreased by 8 percent, but was less during the part of each day when measurements were made. Flow-duration frequency for the May and September measurements was 27 percent and 74 percent, respectively (Moffatt and others, 1990).

The results for the May and September measurements differed both spatially and seasonally (fig. 17, Appendix 2). The gain increased in the downstream direction during the May measurement, although only in the lower reach was the gain greater than the measurement uncertainty. The September measurements indicated minimal gains and losses in streamflow, with the upstream reach losing slightly and the downstream reach gaining slightly. Comparison of the May and

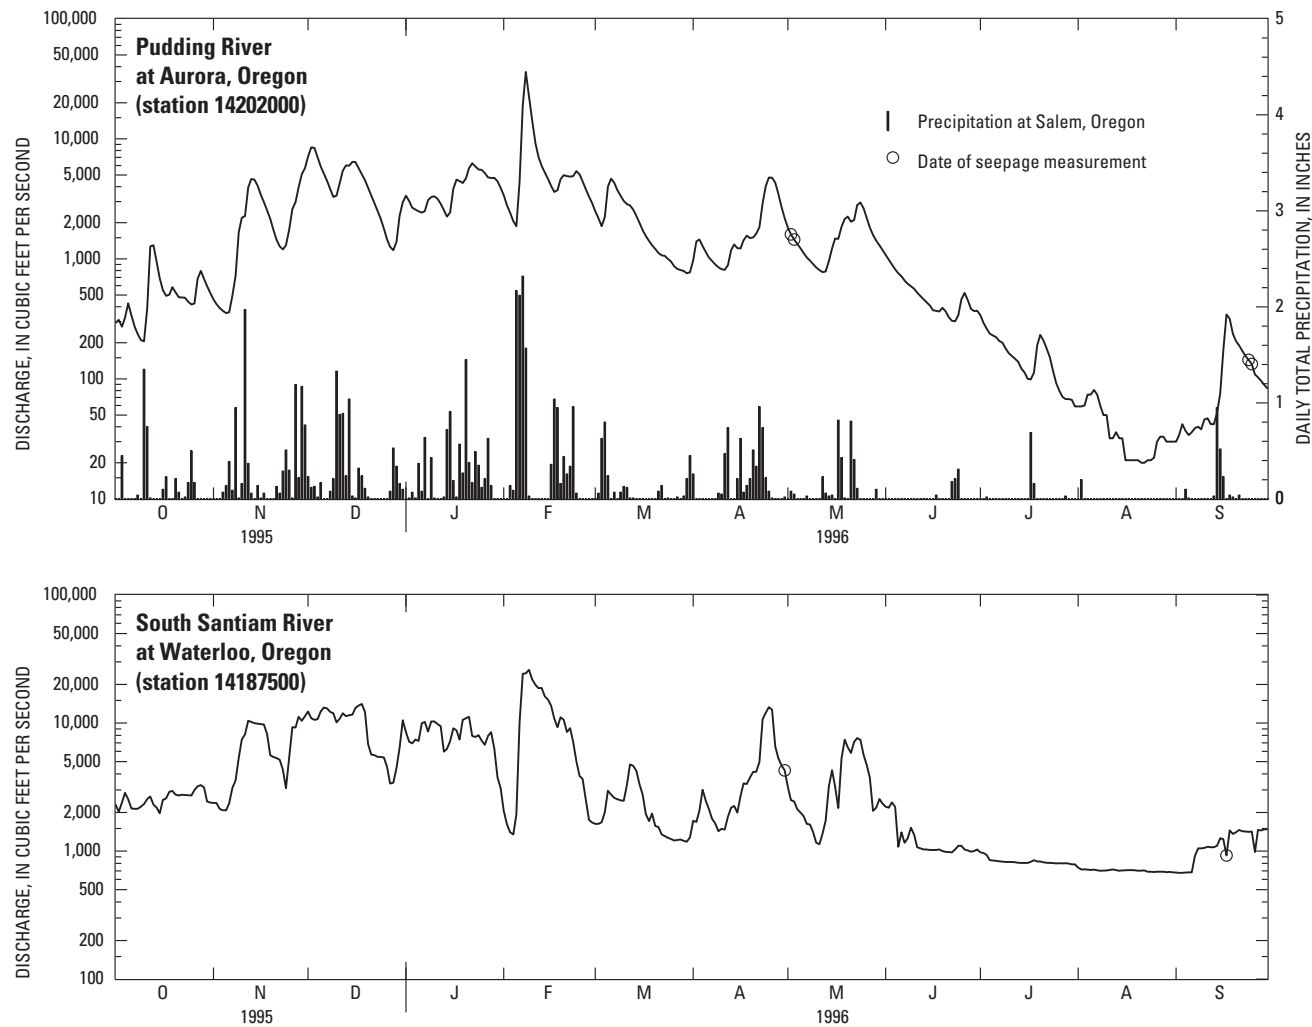


Figure 16. Daily mean discharge for water year 1996, discharge at time of seepage measurement, and precipitation at Salem, Oregon.

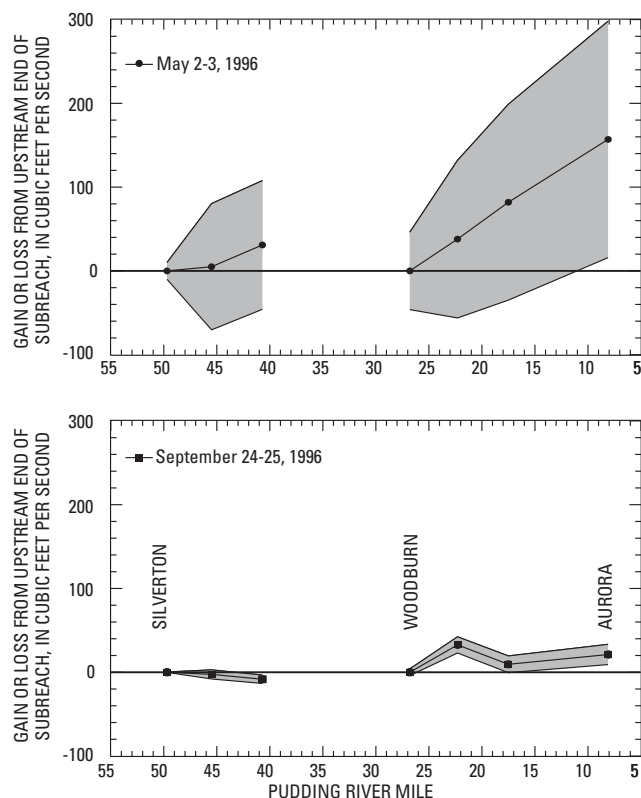


Figure 17. Gains to and losses from selected reaches of the Pudding River from Silverton to Aurora, Oregon, for May and September 1996. (Shaded areas represent uncertainty of streamflow measurements of 5 percent.)

September measurements for each subreach indicated a general trend, in which less gain, or a change from gain to loss, was observed in the summer compared to the spring measurements.

Results of the May measurements were compared with seepage measurements made in March 1993 (Laenen and Risley 1997). The 1993 results indicated no seepage in the reach from RM 49.5 to RM 45.4 and $0.4 \text{ ft}^3/\text{s}$ per mile in the reach from RM 45.4 to RM 8.2. The small gains in 1993 may be attributable to significantly less precipitation than in 1996; however, the gains observed, like the gains observed during the current study, were less than the measurement uncertainty. Although no daily discharge data were available for the Pudding River for water year 1993, the mean annual discharge at the Willamette River at Salem was about 40 percent greater in 1996 than 1993 (Hubbard and others, 1993, 1996).

South Santiam River

Streamflow on the South Santiam River was measured from Foster, at RM 37.0, to Lebanon, at RM 18.2

(pl. 1). Measurements were made on April 30, 1996, and September 17, 1996 (Appendix 2). Measurements in April were made at RM 33.4, 27.7, and 18.2. Computed flows from the stream gages at Foster (station 14187200 at RM 37.0) and Waterloo (station 14187500 at RM 23.3) were used in lieu of direct measurements. Measurement locations in September were the same except that the streamflow was measured at RM 33.6 instead of at RM 33.4 due to improved measuring conditions. Tributary measurements were made on Ames, Roaring, McDowell, and Hamilton Creeks and on Lebanon-Santiam Canal, as well as several unnamed tributaries.

No out-of-stream irrigation withdrawals were observed on either the April or September studies. A detailed out-of-stream withdrawal inventory was not done because the reach was inaccessible by boat.

Records from the gaging station at Waterloo describe the flow conditions on the day of each set of discharge measurements (fig. 16). Although daily mean discharge was decreasing on the days adjacent to the April 30 measurements, discharge remained constant for about 18 hours prior to the measurements. For the September 17 measurements, discharge at the Waterloo gage decreased 19 percent from 0800 to 1700 on the day of the measurements due to a brief change in the outflow from Foster Dam. This caused the mean discharge on September 17 to be lower than on the surrounding days. Flow-duration frequency for the April and September measurements was 23 percent and 78 percent, respectively (Moffatt and others, 1990).

A potential source of uncertainty with the gain/loss measurements in the South Santiam River is the variation in flow due to regulation at Foster Dam. Depending on the magnitude of the flow, the lag time between a release change at Foster Dam and the resulting flow at the Waterloo streamflow-gaging station can range from several hours to a day. Flow regulation did not affect the April study, in which the discharge at both gages was fairly constant for half a day prior to the beginning of measurements. For the September measurement, the flow at the Foster gage was fairly constant; however, the flow at Waterloo was decreasing due to a reduction in outflow from Foster Dam earlier in the day. Results would likely vary considerably depending on stream discharge and on whether the discharge was increasing or decreasing.

An additional source of uncertainty is the effect of bank storage. For example, for the September series of measurements, river level was higher for several days

prior to the measurements. Following the decrease in river level, water draining from the stream banks could be erroneously interpreted as a gain in streamflow or could mask an actual loss of streamflow.

The April measurements indicated a gain from RM 37.0 to RM 33.4 and losses for the remainder of the reach; however, the gains and losses were within the uncertainty of the measurements (fig. 18). The September measurements indicated only minor gains and losses, with no clear trend, and again did not exceed the measurement uncertainty.

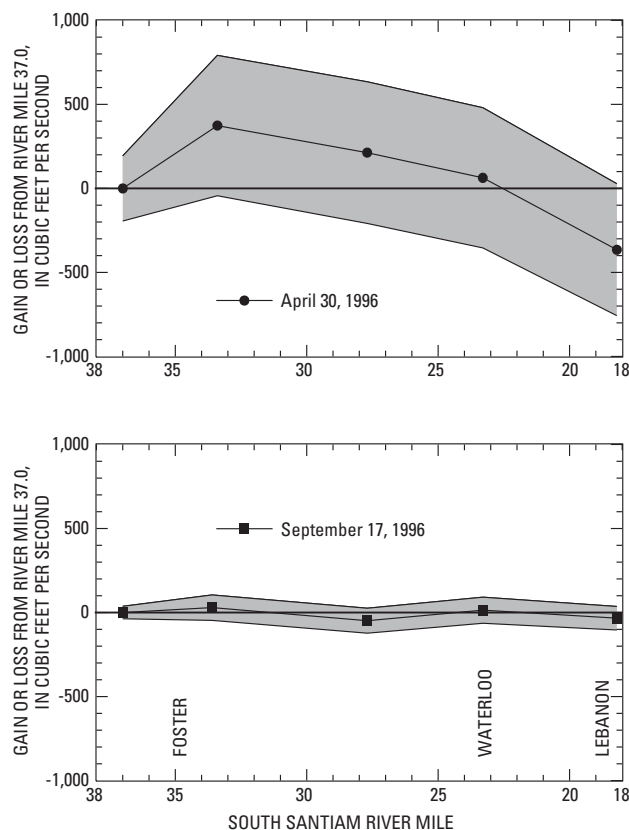


Figure 18. Gains to and losses from the South Santiam River from Foster to Lebanon, Oregon, for April and September 1996. (Shaded areas represent uncertainty of streamflow measurements of 5 percent.)

In an earlier study, discharge measurements were made in September 1966 (U.S. Geological Survey, 1967), prior to construction of Foster Dam, as part of an assessment of the ground-water resources of the Santiam Basin. These measurements are likely the single most accurate determination of seepage on the lower South Santiam River during base-flow conditions because the regulation of streamflow during the current study was not a factor in the earlier study, and the low

flow enabled comparison of small changes in streamflow through the reach. The reach was downstream of the current study reach, extending from Lebanon, at RM 18.2, to the mouth. The flow was low partly due to the pre-dam condition, and is also low due to significant diversion between Waterloo and Lebanon. Although diversion records are not available, the daily discharge at Waterloo on September 1, 1966, was approximately 120 ft³/s greater than the discharge measured 5 miles downstream at Lebanon on the same day. Tributaries were measured; however, the occurrence of irrigation withdrawals from the stream was unknown during this period. The stream showed a gain of 24.3 ft³/s, or 1.4 ft³/s per mile from RM 18.2 to the mouth. This gain, though small compared to the fluxes measured during the current study, is significant.

Measurements were made in September 1992 (Laenen and Risley, 1997) in part of the same reach studied in September 1966. The 1992 measurements indicated a loss of approximately 130 ft³/s in the reach from RM 7.7 to RM 3.3. This loss is greater than the measurement uncertainty and is particularly significant when compared to the 1966 measurements, in which the total flow in the South Santiam River was approximately 60 ft³/s.

SUMMARY AND CONCLUSIONS

The U.S. Geological Survey, in cooperation with the Oregon Water Resources Department, collected and analyzed data for the purpose of providing a quantitative understanding of the ground-water/surface-water connection in the Willamette Basin. This effort included (1) the estimation of recharge using precipitation-runoff models and daily streamflow records, (2) the estimation of ground-water contribution to streamflow using precipitation-runoff models and base-flow separation analyses at selected gage locations, and (3) identification of gaining and losing reaches of streams along the main stem of the Willamette River and selected tributaries.

The precipitation runoff models were developed using the Precipitation Runoff Modeling System (PRMS). PRMS is designed to analyze the effects of precipitation, climate, and land use on streamflow and general basin hydrology, and to provide an approximation of the water budget of a basin. A total of 216 sub-basin models were developed to encompass the surface area of the entire Willamette River Basin. The models were calibrated for conditions in the Willamette River Basin by matching simulated streamflow with observed

streamflow for nine small, unregulated streams. The timing of the simulated peaks was consistently close to the observed peaks for all these subbasins. In addition, simulated annual flows compared well with observed annual flows from 47 selected subbasins of varying of size, both unregulated and regulated, within the Willamette River Basin for the 1973 to 1996 water year period. During the 24-year period, the simulated annual flows were generally evenly under or over the observed annual flows. Spatially, the model showed underestimation in basins on the west side of the Cascades and overestimation on the Coast Range side of the Willamette River Basin. Mean annual recharge was computed from simulations using the 24-year period at each of the basins.

Various components of the model output, such as total flow, base flow, recharge, and evapotranspiration, were compared with estimates of these water budget components that were measured or estimated in other analyses of the study. Variations in simulated recharge throughout the Willamette River Basin appeared to closely correspond with precipitation and total flow variations. Recharge was generally between 22 to 49 percent of mean annual total flow.

Recharge simulated by PRMS models in the lower elevation region of the Willamette River Basin ranged from 7 to 35 inches. These values were generally lower than recharge values estimated for the Willamette Lowland Regional Aquifer-System Analysis study (Woodward and others, 1998) which were between 1 and 50 inches. This is because the geologic and soils data, which affect the infiltration rates, were more generalized in the PRMS models developed by Laenen and Risley (1997) than by Woodward and others, 1998. Recharge estimates at streamflow-gaging stations using RORA ranged from 30 to 96 inches. The PRMS and RORA estimates differ because PRMS simulates recharge to aquifers, whereas recharge derived by RORA also represents subsurface flow.

Base-flow separation analyses, using the computer program PART, were done on 52 streamflow-gaging-station locations, including currently operated unregulated and regulated stations, as well as discontinued unregulated stations. PRMS was used to estimate streamflow at the discontinued stations. Linear regression was used to develop a relation of base flow to total flow for the stations subject to flow regulation and for discontinued stations, to determine the base-flow com-

ponent of streamflow during the 1995–96 period. Base-flow estimates ranged from 50 to more than 90 percent of total streamflow. Estimates of base flow from the PRMS model ranged from 30 to 50 percent of total streamflow. Estimates using the two methods define a reasonable range of the base-flow contribution to streamflow in the basin.

Gain-loss measurements were made on the Willamette River and selected tributaries during spring and summer. The data indicated that gains and losses in the Middle Fork Willamette River and Willamette River were small, and often changes did not exceed the measurement uncertainty. Of the five reaches measured in the spring of 1996, three were gaining and two were losing flow; however, gains and losses were within the limit of uncertainty of the measurements. During the summer of 1996, only the Harrisburg reach indicated a significant change in flow, in which the stream gained 470 ft³/s from RM 169.6 to RM 149.6. Measurement made on the Jasper reach indicated a significant loss; however, the discharge returned to the initial level at the next section downstream. Measurements made on the remaining reaches indicated small losses that were within the uncertainty of the measurements. The measurements showed a general trend, in which the gain was greater (or the loss was less) in the spring than in the summer; however, in the summer the Harrisburg reach showed the opposite trend.

Gain-loss measurements on the South Yamhill River indicated a significant gain during spring. In summer, changes in discharge did not exceed the measurement uncertainty. During the spring series of measurements, the magnitude of seepage increased at successive locations downstream.

Measurements made on the Pudding River indicated slight gains during the spring and decreased gain or slight loss during the summer. More gain occurred in the more downstream part of the basin when compared to the upstream part.

Gains and losses on the South Santiam River were minimal and were within the accuracy limitation of the measurements.

SELECTED REFERENCES

- Baldwin, E.M., 1981, *Geology of Oregon*: Dubuque, Iowa, Kendall/Hunt Publishing Co., 170 p.
- Bauer, H.H., and Vaccaro, J.J., 1990, Estimates of ground-water recharge to the Columbia Plateau Regional Aquifer System, Washington, Oregon, and Idaho, for predevelopment and current land-use conditions: U.S. Geological Survey Water-Resources Investigations Report 88-4108, 37 p., 4 pls.
- Cuenca, R.H., 1992, Oregon crop water use and irrigation requirements: Corvallis, Oregon State University, Department of Bioresource Engineering, Extension Miscellaneous 8530, 184 p.
- Daly, C., Neilson, R.P., and Phillips, D.L., 1994, A statistical-topographic model for estimating climatological precipitation over mountainous terrain: *Journal of Applied Meteorology*, v. 33, no. 2, p. 140-158.
- Daly, C., Taylor, G.H., and Gibson, W.P., 1997, The PRISM approach to mapping precipitation and temperature, *in* Conference on Applied Climatology, 10th, Reno, Nevada, October 1997, Proceedings (reprint): American Meteorological Society, p. 10-12.
- Farnsworth, R.K., and Peck, E.L., 1982, Evaporation atlas for the contiguous 48 United States: National Oceanic and Atmospheric Administration Technical Report NWS 33, 26 p.
- Fenneman, N.M., 1931, *Physiography of the Western United States*: McGraw-Hill Book Company, Inc., 534 p.
- Foxworthy, B.L., 1970, Hydrologic conditions and artificial recharge through a well in the Salem Heights area of Salem, Oregon: U.S. Geological Survey Water-Supply Paper 1594-F, 56 p.
- Frank, F.J., 1973, Ground water in the Eugene-Springfield area, southern Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 2018, 65 p.
- Frank, F.J., 1974, Ground water in the Corvallis-Albany area, central Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 2032, 48 p.
- Frank, F.J., 1976, Ground water in the Harrisburg-Halsey area, southern Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 2040, 45 p.
- Fritschen, L.J., Hsia, Joe, and Doraiswamy, Paul, 1977, Evaporation of a Douglas fir determined with a weighing lysimeter: *Water Resources Research*, v. 13, no. 1, p. 145-148.
- Gonthier, J.B., 1983, Ground-water resources of the Dallas-Monmouth area, Polk, Benton, and Marion Counties: Oregon Water Resources Department, Ground Water Report No. 28, 50 p.
- Hamon, W.R., 1961, Estimating Potential Evapotranspiration: Proceedings of the American Society of Civil Engineers, Journal of the Hydrologic Division, V. 87, No. HY3, p. 107-120.
- Hampton, E.R., 1972, Geology and ground water of the Molalla-Salem Slope area, northern Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 1997, 83 p.
- Hart and Newcomb, 1965, Ground water of the Tualatin Valley, Oregon: U.S. Geological Survey Water-Supply Paper 1697, 172 p.
- Helm, D.C., Leonard, A.R., 1976, Ground-water resources of the Lower Santiam River Basin, Middle Willamette Valley, Oregon: U.S. Geological Survey Open-File Report 76-334, 187 p.
- Hinkle, S. and Polette, D., 1999, Arsenic in Ground Water of the Willamette Basin, Oregon: U.S. Geological Survey Water-Resources Investigations Report 99-4205, 28 p.
- Hubbard, L.E., Herrett, T.A., Kraus, R.L., Ruppert, G.P., and Courts, M.L., 1993, Water resources data, Oregon, water year 1993: U.S. Geological Survey Water-Data Report OR-93-1, 498 p.
- Hubbard, L.E., Herrett, T.A., Ruppert, G.P., and Courts, M.L., 1996, Water resources data, Oregon, water year 1995: U.S. Geological Survey Water-Data Report OR-95-1, 452 p.
- , 1997, Water resources data, Oregon, water year 1996: U.S. Geological Survey Water-Data Report OR-96-1, 432 p.
- Laenen, Antonius, and Risley, J.C., 1997, Precipitation-Runoff and Streamflow-Routing Models for the Willamette River Basin, Oregon: U.S. Geological Survey Water-Resources Investigations Report 95-4284, 197 p.
- Leavesley, G.H., Lichty, R.W., Troutman, B.M., and Saindon, L.S., 1983, Precipitation-runoff modeling system—User's manual: U.S. Geological Survey Water-Resources Investigations Report 83-4238, 207 p.
- McFarland, W.D., 1983, A description of aquifer units in Western Oregon: U.S. Geological Survey Open-File Report 82-165, 35 p.
- Moffatt, R.L., Wellman, R.E., and Gordon, J.M., 1990, Statistical summaries of streamflow data in Oregon: Volume 1—Monthly and annual streamflow, and flow-duration values: U.S. Geological Survey Open-File Report 90-118, 405 p.
- National Oceanic and Atmospheric Administration (NOAA), 1996, Hourly precipitation data, Oregon, April through September, 1996, Volume 46, number 4 through 9: U.S. Asheville, North Carolina, National Climatic Data Center.
- Natural Resource Conservation Service, 1986, General soil map, state of Oregon: Portland, Oregon, Natural Resource Conservation Service (formerly Soil Conservation Service), scale 1:1,000,000.
- O'Connor, 2001, Origin, extent, and thickness of quaternary geologic units in the Willamette Valley, Oregon: U.S. Geological Survey Professional Paper 1620, 52 p., 1 pl.

- Oregon Climate Service, Data archives—Archives of normals and historical data: http://www.ocs.orst.edu/ocs_data.html, accessed May 15, 2000.
- Oregon Water Resources Department, 1992, Willamette Basin report: Salem, Oregon, 349 p.
- Orzol, L.L., Wozniak, K.C., Meissner, T.R., and Lee, D.B., 2000, Ground-Water and Water-Chemistry Data for the Willamette Basin, Oregon: U.S. Geological Survey Water-Resources Investigations Report 99-4036, 141 p., 1 pl., CD-ROM.
- Price, 1967, Geology and water resources in the French Prairie area, northern Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 1833, 97 p.
- Rantz, S.E., and others, 1982, Measurement and computation of streamflow—Volume 1—Measurement of stage and discharge; Volume 2—Computation of discharge: U.S. Geological Survey Water-Supply Paper 2175, 631 p.
- Redmond, K.T., 1985, An inventory of climate data for the state of Oregon: Corvallis, Oregon State University, Office of the State Climatologist, Report SCP-3, 160 p.
- Rothacher, Jack, Dyrness, C.T., and Fredriksen, R.L., 1967, Hydrologic and related characteristics of three small watersheds in the Oregon Cascades: Portland, Oregon, U.S. Department of Agriculture, Forest Service, Pacific Northwest Forest and Range Experiment Station, 54 p.
- Rutledge, A.T., 1998, Computer programs for describing the recession of ground-water discharge and for estimating mean ground-water recharge and discharge from streamflow records-update: U.S. Geological Survey Water-Resources Investigations Report 98-4148, 43 p.
- Simpson, M.R., and Oltmann, R.N., 1993, Discharge measuring system using an acoustic doppler profiler with applications to large rivers and estuaries: U.S. Geological Survey Water-Supply Paper 2395, 32 p.
- Snyder, D.T., Morgan, D.S., and McGrath, T.S., 1994, Estimation of ground-water recharge from precipitation, runoff into dry wells, and on-site waste-disposal systems in the Portland basin, Oregon and Washington: U.S. Geological Survey Water-Resources Investigations Report 92-4010, 33 p.
- Taylor, G.H., 1993, Normal annual precipitation map, state of Oregon, 196-1990: Corvallis, Oregon State University, Office of the State Climatologist, Scale 1:1,000,000.
- Troendle, C.A., 1985, Variable source area models, *in* Anderson, M.G., and Burt, T.P., eds., Hydrological forecasting: John Wiley and Sons Ltd., p. 347-403.
- U.S. Census Bureau, 2000 (rev.), Land area, population, and density for states and counties, 1990: URL http://www.census.gov/population/censusdata/90den_stco.txt, accessed May 30, 2001.
- U.S. Geological Survey, 1990 (revised), Digital elevation models: U.S. Geological Survey, National Mapping Program, Technical Instructions Data User Guide 5, 51 p.
- U.S. Geological Survey, 1967, Water resources data, Oregon, water year 1966, part 1, Surface water records, 355 p.
- Waring, R.H., and Schlesinger, W.H., 1985, Forest ecosystems—Concepts and management: Orlando, Florida, Academic Press, 340 p.
- Willamette Basin Task Force, 1969, Willamette Basin comprehensive study: Portland, Oregon, Pacific Northwest River Basins Committee Report, 155 p.
- Woodward, D.G., Gannett, M.W., and Vaccaro, J.J., 1998, Hydrologic framework of the Willamette lowland aquifer system, Oregon and Washington: U.S. Geological Survey, Professional Paper 1424-B, 82 p.

APPENDIXES

APPENDIX 1. RECHARGE AND BASE-FLOW ESTIMATES AT STREAMFLOW-GAGING STATIONS IN THE WILLAMETTE RIVER BASIN, OREGON

[PRMS, Precipitation-Runoff Modeling System; RORA, automated recharge estimate program; PART, automated base-flow-separation program; Map number refers to plate 1; (u), USGS streamflow-gaging station; (d), discontinued streamflow-gaging station, streamflow estimated from PRMS model; (r), USGS streamflow-gaging station, regulated flow]

Map number	Station name (all stations are in Oregon)	Station number	Water Year 1995				Water Year 1996			
			Recharge, in inches		Base flow		Recharge, in inches		Base flow	
			From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow	From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow
1	Middle Fork Willamette River near Oakridge	14144800	14.68	39.63	36.49 (u)	81	20.08	54.76	43.12 (u)	71
2	Middle Fork Willamette River above Salt Creek, near Oakridge	14145500	14.08		29.07 (r)	77	19.26		40.81 (r)	72
3	Salmon Creek near Oakridge	14146500	16.35		37.23 (d)	86	20.39		51.03 (d)	84
4	North Fork of Middle Fork Willamette River near Oakridge	14147500	15.9		37.10 (d)	79	20.26		50.30 (d)	77
5	Middle Fork Willamette River below North Fork, near Oakridge	14148000	14.98		31.74 (r)	76	19.7		44.39 (r)	73
	Middle Fork Willamette River near Dexter	14150000	14.78				19.31			
7	Fall Creek near Lowell	14150300	17.49	32.75	29.31 (u)	65	20.47	49.68	38.54 (u)	56
8	Fall Creek below Winberry Creek near Fall Creek	14151000	16.79		25.80 (r)	63	19.68		35.63 (r)	61
	Middle Fork Willamette River at Jasper	14152000	14.99				19.08			
	Coast Fork Willamette River below Cottage Grove Dam	14153500	15.7				20.32			
11	Row River above Pitcher Creek near Dorena	14154500	17.49	29.55	23.20 (u)	59	22.15	36.40	27.38 (u)	49
12	Coast Fork Willamette River near Goshen	14157500	15.02		18.96 (r)	59	19.42		26.69 (r)	57
13	Willamette River at Springfield	14158000	14.79		26.62 (d)	67	19.11		38.15 (d)	65
	Mckenzie River at Outlet of Clear Lake	14158500	24.07				35.94			

APPENDIX 1. RECHARGE AND BASE-FLOW ESTIMATES AT STREAMFLOW-GAGING STATIONS IN THE WILLAMETTE RIVER BASIN, OREGON—Continued

[PRMS, Precipitation-Runoff Modeling System; RORA, automated recharge estimate program; PART, automated base-flow-separation program; Map number refers to plate 1; (u), USGS streamflow-gaging station; (d), discontinued streamflow-gaging station, streamflow estimated from PRMS model; (r), USGS streamflow-gaging station, regulated flow]

Map number	Station name (all stations are in Oregon)	Station number	Water Year 1995				Water Year 1996			
			Recharge, in inches		Base flow		Recharge, in inches		Base flow	
			From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow	From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow
15	Smith River above Smith River Reservoir near Belknap Springs	14158790	29.84	66.54	56.00 (u)	70	42.02	96.41	72.08 (u)	64
	Mckenzie River below Trail Bridge Dam near Belknap Springs	14158850	25.1				36.56			
17	Mckenzie River at Mckenzie Bridge	14159000	26.21		65.96 (d)	94	37.25		95.43 (d)	92
18	South Fork Mckenzie River near Rainbow	14159500	26.79		43.33 (r)	82	37.56		60.46 (r)	77
19	Blue River below Tidbits Creek near Blue River	14161100	30.2	57.51	51.66 (u)	63	42.36	68.69	61.27 (u)	58
20	Lookout Creek near Blue River	14161500	30.95	62.08	51.86 (u)	74	43.39	95.11	70.66 (u)	65
	Blue River at Blue River	14162200	29.47				40.93			
22	McKenzie River near Vida	14162500	26.75		48.45 (r)	82	37.53		66.86 (r)	79
23	Mohawk River near Springfield	14165000	17.79	37.49	33.06 (u)	77	21.74	53.38	41.79 (u)	66
24	McKenzie River near Coburg	14165500	23.87		48.86 (d)	78	32.49		70.30 (d)	74
25	Long Tom River near Noti	14166500	24	35.56	32.62 (u)	71	28.02	39.17	32.58 (u)	64
26	Coyote Creek near Crow	14167000	16.35		22.02 (d)	52	19.57		27.67 (d)	51
	Long Tom River near Alvadore	14169000	18.19				21.49			
28	Long Tom River at Monroe	14170000	17.49		18.66 (r)	66	20.31		26.36 (r)	66
29	Marys River near Philomath	14171000	24.42		43.15 (d)	66	29.49		55.13 (d)	65
30	Calapooia River at Holley	14172000	19.4		30.80 (d)	64	22.76		38.55 (d)	63
31	North Santiam River below Boulder Creek near Detroit	14178000	24.17	60.88	54.65 (u)	82	33.88	74.29	66.90 (u)	75
32	North Santiam River at Niagara	14181500	26.32		57.26 (r)	76	34.48		72.96 (r)	74

APPENDIX 1. RECHARGE AND BASE-FLOW ESTIMATES AT STREAMFLOW-GAGING STATIONS IN THE WILLAMETTE RIVER BASIN, OREGON—Continued

[PRMS, Precipitation-Runoff Modeling System; RORA, automated recharge estimate program; PART, automated base-flow-separation program; Map number refers to plate 1; (u), USGS streamflow-gaging station; (d), discontinued streamflow-gaging station, streamflow estimated from PRMS model; (r), USGS streamflow-gaging station, regulated flow]

Map number	Station name (all stations are in Oregon)	Station number	Water Year 1995				Water Year 1996			
			Recharge, in inches		Base flow		Recharge, in inches		Base flow	
			From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow	From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow
33	Little North Santiam River near Mehama	14182500	30.63	67.32	52.23 (u)	60	38.51	82.28	66.50 (u)	52
34	North Santiam River at Mehama	14183000	26.79		54.30 (r)	71	34.58		71.47 (r)	69
35	South Santiam River Below Cascadia	14185000	22.28	49.58	43.49 (u)	65	28.42	67.46	51.08 (u)	55
36	Quartzville Creek near Cascadia	14185900	24.31	66.86	49.85 (u)	56	32.3	76.71	62.61 (u)	50
37	Wiley Creek near Foster	14187000	19.68	42.45	36.91 (u)	69	25.58	50.13	40.18 (u)	55
38	South Santiam River at Waterloo	14187500	20.72		42.58 (r)	64	26.24		55.43 (r)	62
39	Thomas Creek near Scio	14188800	23		41.92 (d)	68	30.18		55.50 (d)	65
40	Santiam River at Jefferson	14189000	22.48		38.36 (r)	62	28.56		52.06 (r)	60
41	Luckiamute River near Suver	14190500	23.32	48.23	39.61 (u)	65	24.84	64.19	45.22 (u)	56
42	Rickreall Creek near Dallas	14190700	27.43		53.98 (d)	66	31.58		61.64 (d)	65
43	South Yamhill River near Willamina	14192500	30.3		53.26 (d)	62	30.48		58.02 (d)	61
44	Willamina Creek near Willamina	14193000	25.26		44.44 (d)	74	27.12		53.03 (d)	72
4	South Yamhill River near Whiteson	14194000	21.67				23.64			
46	South Yamhill River at McMinnville	14194150	20.93		29.77 (u)	55	23.28		37.21 (u)	52
47	Molalla River above Pine Creek near Wilhoit	14198500	34.85		74.06 (d)	65	38.87		95.53 (d)	64
48	Molalla River near Canby	14200000	27.66		51.71 (d)	63	31.29		66.52 (d)	62
49	Silver Creek at Silverton	14200300	23.96		52.42 (d)	75	25.66		67.37 (d)	74
50	Pudding River near Mount Angel	14201000	20.01		38.66 (d)	78	23.09		51.65 (d)	75
51	Butte Creek at Monitor	14201500	26.83		53.20 (d)	71	30.9		70.05 (d)	70
52	Pudding River at Aurora	14202000	19.89	34.56	29.06 (u)	76	22.98	48.39	40.41 (u)	72

APPENDIX 1. RECHARGE AND BASE-FLOW ESTIMATES AT STREAMFLOW-GAGING STATIONS IN THE WILLAMETTE RIVER BASIN, OREGON—Continued

[PRMS, Precipitation-Runoff Modeling System; RORA, automated recharge estimate program; PART, automated base-flow-separation program; Map number refers to plate 1; (u), USGS streamflow-gaging station; (d), discontinued streamflow-gaging station, streamflow estimated from PRMS model; (r), USGS streamflow-gaging station, regulated flow]

Map number	Station name (all stations are in Oregon)	Station number	Water Year 1995				Water Year 1996			
			Recharge, in inches		Base flow		Recharge, in inches		Base flow	
			From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow	From PRMS	From RORA	From PART, in inches, and source	Percent of stream-flow
53	Tualatin River near Dilley	14203500	18.26		37.86 (r)	70	18.02		48.55 (r)	66
54	Tualatin River at West Linn	14207500	15.45		28.41 (r)	79	15.99		41.23 (r)	79
	Oak Grove Fork near Government Camp	14208700	16.44				19.73			
56	Oak Grove Fork above Powerplant Intake	14209000	17.55		51.29 (r)	95	20.96		74.89 (r)	94
57	Clackamas River above Three Lynx Creek	14209500	21.29		49.59 (r)	80	25.01		64.88 (r)	78
58	Fish Creek near Three Lynx	14209700	28.05	60.93	48.47 (u)	63	33.36	71.09	53.58 (u)	56
59	Clackamas River at Estacada	14210000	21.49		48.80 (r)	77	25.1		62.11 (r)	75
60	Johnson Creek at Sycamore	14211500			17.29 (u)	52			20.70 (u)	47
61	Johnson Creek at Milwaukie	14211550			14.24 (u)	58			18.87 (u)	56
	Willamette River at Portland	14211720	18.93				23.01			

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
Middle Fork Willamette River (RM 195.0–190.2), April 15, 1996						
Middle Fork Willamette River	195.0	2,080				Jasper streamflow-gaging station (14152000)
Wallace Creek	194.9		4.7			
Willamette River	192.8	2,080		0	0	
Mill race diversion	190.8		-69.5			
Pudding Creek	190.7		12.9			
Middle Fork Willamette River	190.2	1,920		-100	-110	
Willamette River (RM 169.6–149.6), May 7, 1996						
Willamette River	169.6	6,930				Marshall Island
pond drain	164.8		3			
Willamette River	163.7	7,050		120	120	
Willamette River	161.0	7240		190	310	Harrisburg streamflow- gaging station (14166000)
Willamette River	156.3	7,170		-70	240	Cartney Road
Willamette River	149.6	7,120		-50	190	Irish Bend
Willamette River (RM 134.4–119.9), May 8, 1996						
Willamette River	134.4	7,680				Corvallis
City of Corvallis water intake	134.2		-10			
East Channel	132.5		117			
Marys River	132.1		499			
Dixon Creek	130.8		1.4			
City of Corvallis sewage treatment plant	130.7		10			
Willamette River	127.5	7,990		-310	-310	Half Moon Bend
Willamette River	124.4	8,050		60	-250	
Willamette River	119.9	8,160		110	-140	Upstream of Calapooia River
Willamette River (RM 94.2–77.8), May 9, 1996						
Willamette River	94.2	14,000				Independence
Willamette River	89.1	14,000		0	0	Hayden Island
Rickreal Creek	88.0		135			
Pettijohn Creek	85.9		7.92			
Pringle Creek	84.5		136			
Irrigation pumping (5.0 mile)	84.1		-.2			

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS—Continued

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
Willamette River (RM 94.2–77.8), May 9, 1996—Continued						
Willamette River	84.1	14,600		300	300	Salem streamflow-gaging station (14191000)
Mill Creek	83.6		110			
Salem sewage-treatment plant	78.1		53.4			
Willamette River	77.8	14,900		100	500	Keizer
Willamette River (RM 52.4–39.0), May 10, 1996						
Willamette River	52.4	15,800				Downstream of Yamhill River
Hess Creek	52.3		.5			estimated
Chehalem Creek	50.8		33.4			
Spring Brook Creek	47.4		2.0			estimated
Willamette River	46.5	15,900		100	100	
Champoeg Creek	45.1		23.9			
Ryan Creek	44.2		.1			estimated
Willamette River	43.0	15,700		-200	-200	Butteville
Corral Creek	39.8		7.01			
Willamette River	39.0	16,300		600	400	Wilsonville
Middle Fork Willamette River (RM 195.0–187.8), July 23, 1996						
Middle Fork Willamette River	195.0	2,800				Jasper streamflow-gaging station (14152000)
Middle Fork Willamette River	192.8	2,450		-350	<u>-350</u>	
Mill Race diversion	190.8		-86.8			
Pudding Creek	190.7		5.71			
Irrigation pumping (2.3 mile)	190.5		-.3			
Middle Fork Willamette River	190.5	2,750		380	30	
Diversion - Springfield	189.1		-2			
Unnamed tributary	188.5		17.9			
Middle Fork Willamette River	187.8	2,670		-100	-60	Upstream of Coast Fork Willamette River
Willamette River (RM 169.6–149.6), July 24, 1996						
Willamette River	169.6	4,730				Marshall Island
Irrigation pumping (6.3 mile)	163.3		-.8			
Willamette River	163.3	5,100		370	<u>370</u>	Upstream of Curtis Slough

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS—Continued

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
Willamette River (RM 169.6–149.6), July 24, 1996—Continued						
Willamette River	161.0	5,050		-50	<u>320</u>	Harrisburg streamflow- gaging station (14166000)
Willamette River	156.3	5,230		180	<u>500</u>	Cartney Road
Willamette River	149.6	5,200		-30	<u>470</u>	Irish Bend
Willamette River (RM 134.4–119.9), July 30, 1996						
Willamette River	134.4	5,430				Corvallis
City of Corvallis water intake	134.2		-16			
East Channel	132.5		25.2			
Marys River	132.1		51.1			
Dixon Creek	130.8		.3			
City of Corvallis sewage treatment plant	130.7		11			
Irrigation pumping (6.9 mile)	127.5		-.1			
Willamette River	127.5	5,310		-190	-190	Half Moon Bend
Irrigation pumping (3.1 mile)	124.4		-.9			
Willamette River	124.4	5,260		-50	-240	
Irrigation pumping (4.5 mile)	119.9		-2.2			
Willamette River	119.9	5,300		40	-200	Upstream of Calapooia River
Willamette River (RM 94.2–77.8), July 31, 1996						
Willamette River	94.2	7,060				Independence
Irrigation pumping (5.1 mile)	89.1		-1.7			
Willamette River	89.1	7,070		10	10	Hayden Island
Rickreal Creek	88.0		6.8			
Pringle Creek	84.5		96.7			
Irrigation pumping (5.0 mile)	84.1		-2.2			
Willamette River	84.1	7,140		-30	-20	Salem streamflow-gaging station (14191000)
Mill Creek	83.6		63.8			
Salem sewage treatment plant	78.1		48.0			
Willamette River	77.8	6,970		-280	-300	Keizer
Willamette River (RM 52.4–39.0), Aug. 1, 1996						
Willamette River	52.4	7,370				Downstream of Yamhill River
Chehalem Creek	50.8		2.0			
Irrigation pumping (5.9 mile)	46.5		-1.5			
Willamette River	46.5	7,090		-280	-280	

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS—Continued

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
Willamette River (RM 52.4–39.0), Aug. 1, 1996—Continued						
Champoeg Creek	45.1		2.7			
Willamette River	43.0	7,070		-20	-300	Butteville
Corral Creek	39.8		.7			
Willamette River	39.0	7,290		220	-80	Wilsonville
South Yamhill River (RM 37.7–5.6), June 12-13, 1996						
South Yamhill River	37.7	280				Sheridan
Spring	36.5		.1			
Unnamed creek	35.1		1.7			
Unnamed creek	30.1		.3			
Irrigation pumping (10.8 mile)	26.9		-.4			
South Yamhill River	26.9	292		10	10	Bellevue Highway
Unnamed creek	24.6		.2			
Deer Creek	24.5		37.2			
Unnamed creek	19.6		.6			
Unnamed creek	18.7		.1			
Salt Creek	18.1		7.4			
Irrigation pumping (10.2 mile)	16.7		-1.2			
South Yamhill River	16.7	375		39	<u>49</u>	Whiteson
Cozine Creek	5.9		1.9			
South Yamhill River	5.6	472		95	<u>144</u>	McMinnville stream- gaging station (14194150), from rating.
South Yamhill River (RM 37.3–26.9) September 18, 1996						
South Yamhill River	37.7	141				Sheridan
South Yamhill River	26.9	149		8	8	Bellevue Highway
Pudding River (RM 49.7–40.7) May 2, 1996						
Pudding River	49.7	201				Highway 213
Silver Creek	49.2		215			estimated
Abiqua Creek	45.7		336			
Pudding River	45.5	757		5	5	
Pudding River	40.7	783		26	31	Saratoga Road
Pudding River (RM 26.8–8.1) May 3, 1996						
Pudding River	26.8	923				Highway 214
Pudding River	22.3	961		38	38	Highway 211

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS—Continued

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
Pudding River (RM 26.8–8.1) May 3, 1996—Continued						
Butte Creek	20.2		205			
Pudding River	17.5	1,210		44	82	Whiskey Hill Road
Rock Creek	15.5		205			estimated
Pudding River	8.1	1490		80	<u>160</u>	Aurora streamflow-gaging station (14202000), from rating.
Pudding River (RM 49.7–40.7) September 24, 1996						
Pudding River	49.7	5.1				Highway 213
Silver Creek	49.2		26.9			
Abiqua Creek	45.7		23.6			
Pudding River	45.5	53.0		-2.6	-2.6	
Pudding River	40.7	47.2		-5.8	<u>-8.4</u>	Saratoga Road
Pudding River (RM 26.8–8.1) September 25, 1996						
Pudding River	26.8	80.4				Highway 214
Pudding River	22.3	113		33	<u>33</u>	Highway 211
Butte Creek	20.2		15.2			
Pudding River	17.5	105		-23	9	Whiskey Hill Road
Rock Creek	15.5		15.2			estimated
Pudding River	8.1	132		12	<u>21</u>	Aurora streamflow-gaging station (14202000), from rating.
South Santiam River (RM 37.0–18.2), April 30, 1996						
South Santiam River	37.0	3960				Foster streamflow-gaging station (14187200), from rating.
Unnamed creek	35.2		.9			
Unnamed creek	33.8		3.7			
Ames Creek	33.6		31.2			
South Santiam River	33.4	4,370		370	370	Sweet Home
Unnamed creek	33.3		3.6			
Roaring Creek	32.1		8.68			
Unnamed creek	30.7		7.7			
McDowell Creek	27.7		90.7			
South Santiam River	27.7	4,320		-160	210	
Unnamed creek	25.0		30.7			

APPENDIX 2. MEASUREMENTS USED TO DEFINE GAINS AND LOSSES IN THE MIDDLE FORK WILLAMETTE, WILLAMETTE, SOUTH YAMHILL, PUDDING, AND SOUTH SANTIAM RIVERS—Continued

[(a) river mile of streamflow measurement, tributary inflow, or out-of-stream withdrawal along the indicated stream reach; (b) gain or loss rounded to same precision as stream measurement; cumulative changes in discharge greater than the measurement uncertainty are indicated in **bold underlined** type; RM, river mile]

Location	River mile (a)	Discharge, in cubic feet per second		Gain or loss (-), in cubic feet per second (b)		Remarks
		Stream	Tributary or with- drawal	Net change between stream measurements	Cumulative change from up-stream end of reach	
South Santiam River (RM 37.0–18.2), April 30, 1996—Continued						
South Santiam River	23.3	4,200		-150	60	Waterloo streamflow- gaging station (14187500), from rating.
Hamilton Creek	21.2		87.6			
Lebanon Santiam Canal	20.9		-120			streamflow-gaging station (14187600)
South Santiam River	18.2	3,740		-430	-370	Lebanon
South Santiam River (RM 37.0–18.2), Sept. 17, 1996						
South Santiam River	37.0	745				Foster streamflow-gaging station (14187200), from rating.
South Santiam River	33.6	774		29	29	Sweet Home
Ames Creek	33.6		3.45			
Roaring Creek	32.1		8.68			
McDowell Creek	27.7		9.72			
South Santiam River	27.7	718		-78	-49	
Unnamed creek	25.0		1.3			
South Santiam River	23.3	782		63	14	Waterloo streamflow- gaging station (14187500), from rating.
Hamilton Creek	21.2		17.4			
Lebanon Santiam Canal	20.9		-69.7			streamflow-gaging station (14187600)
South Santiam River	18.2	682		-48	-34	Lebanon




WATER RESOURCES INVESTIGATIONS REPORT 01-4215

Inset 1

EXPLANATION

Y5.6 ◆ **Gaging station**
Y37.7 ▼ **Measurement location with river mile—**
Shown in Appendix 2

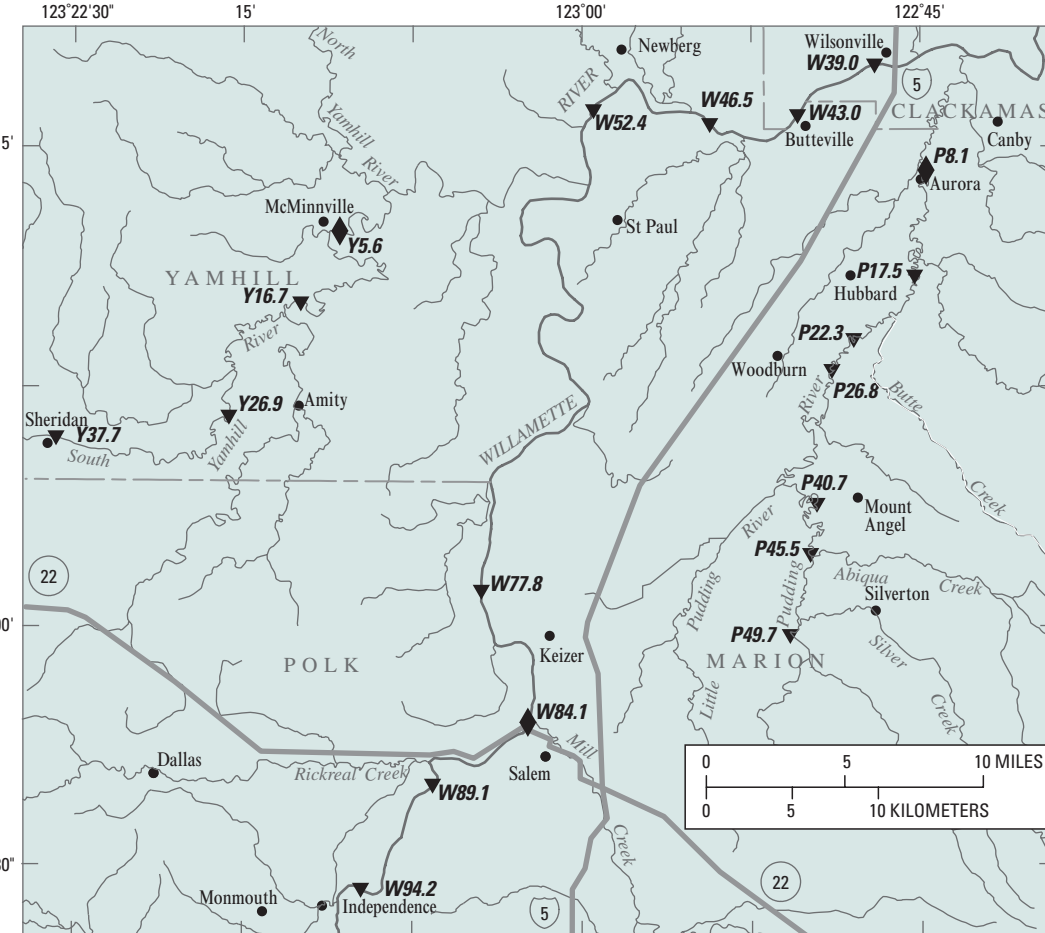

EXPLANATION

Streamflow-gaging-station name and map-reference number shown in Appendix 1

Station status—	Base flow, in percent of total streamflow
1. Active	100
2. Inactive	0
3. Suspended	0
4. Dry	0
5. Abandoned	0
6. Filled	0
7. Dammed	0
8. Diverted	0
9. Other	0

1995 water year	51-60%	61-70%	71-80%	81-96%
-----------------	--------	--------	--------	--------






Regulated operating

regulated, operating






Unregulated, operating

Unregulated, discontinued

Unregulated, discontinued

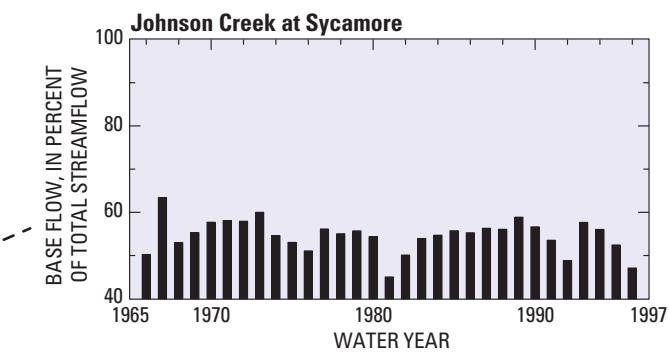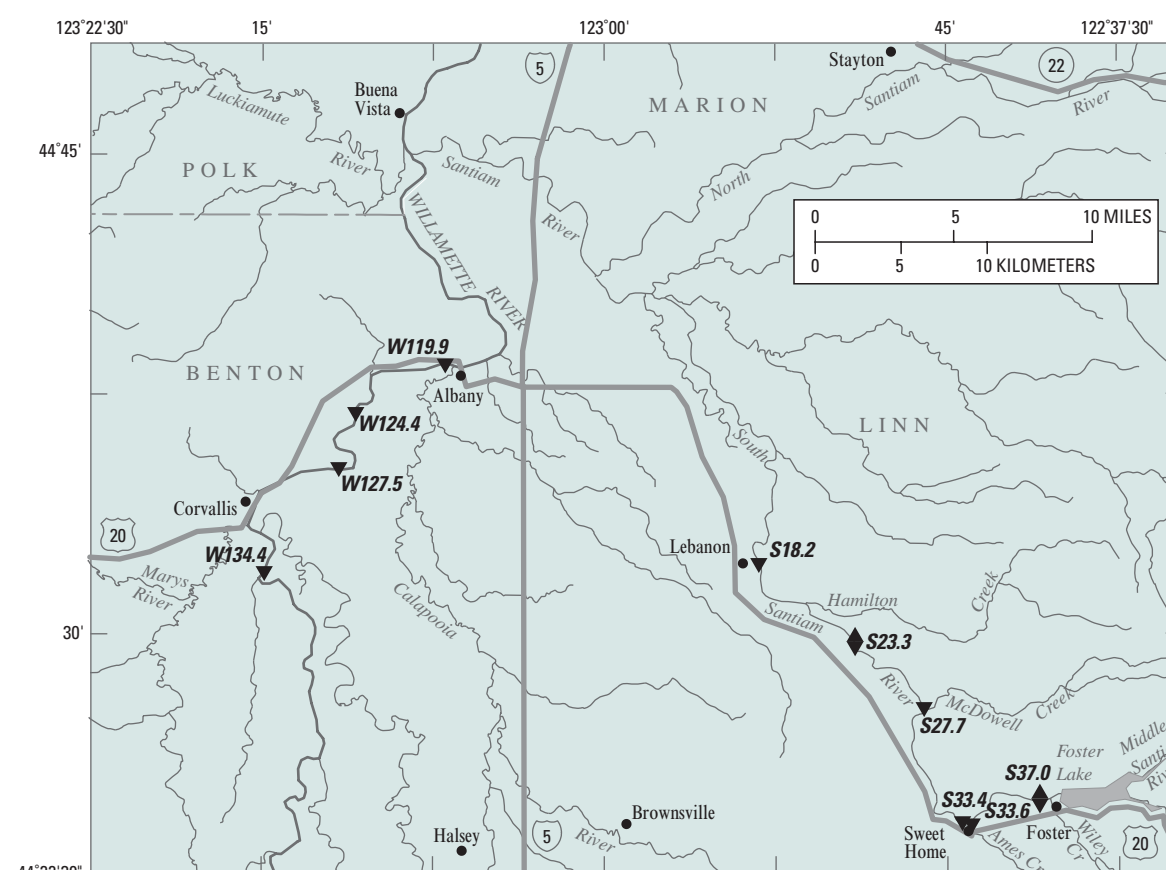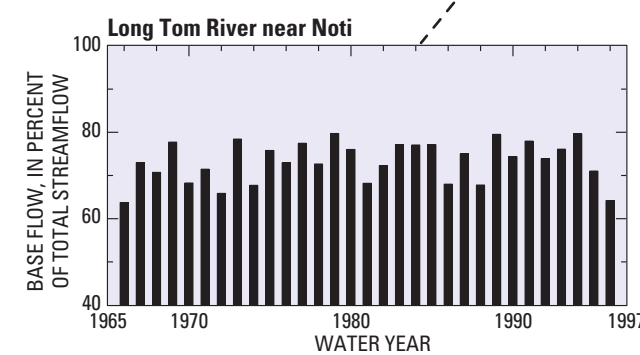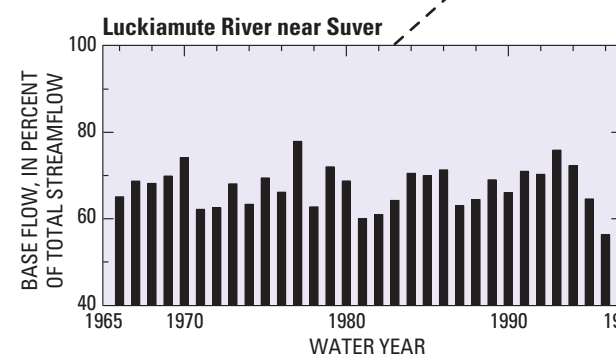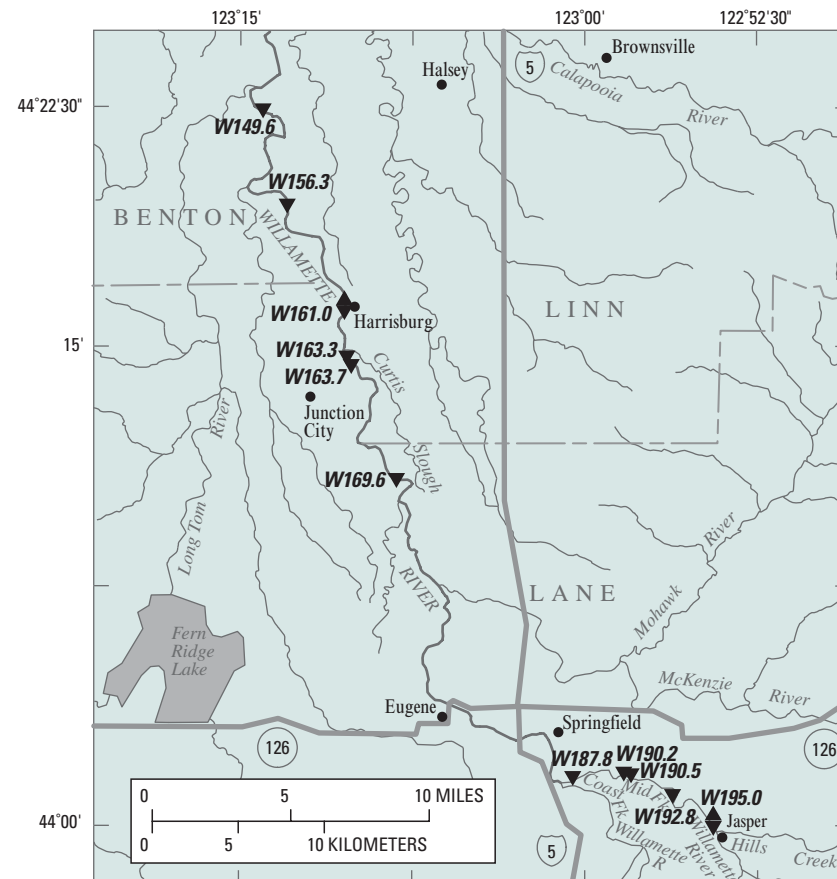***Inset 2******Inset 3***

Base composited from
USGS digital line graphs and other digital information.
Universal Transverse Mercator projection, Zone 10
1927 North American Datum

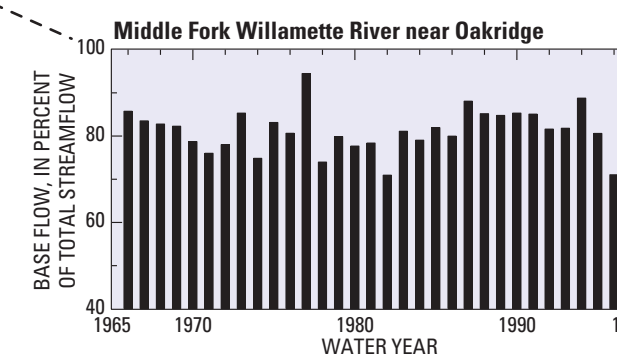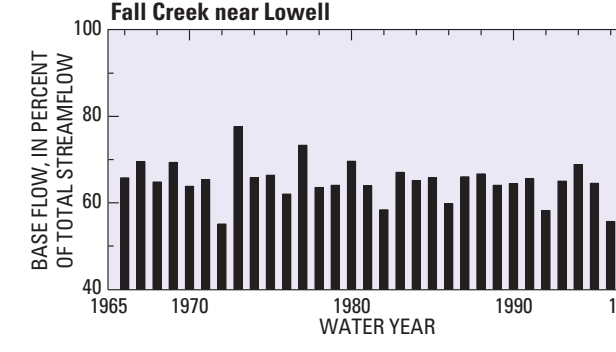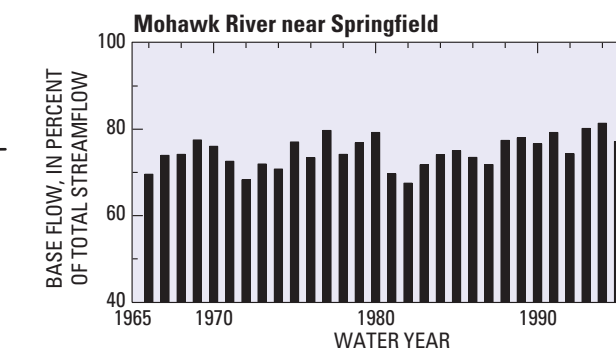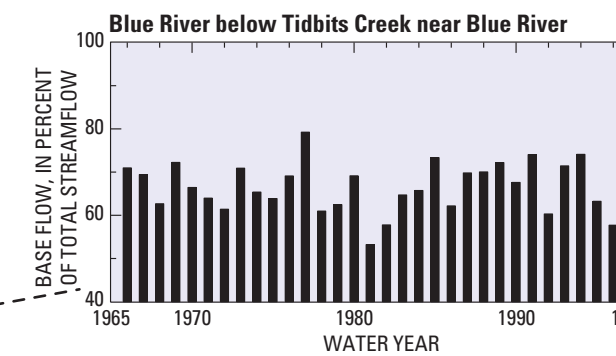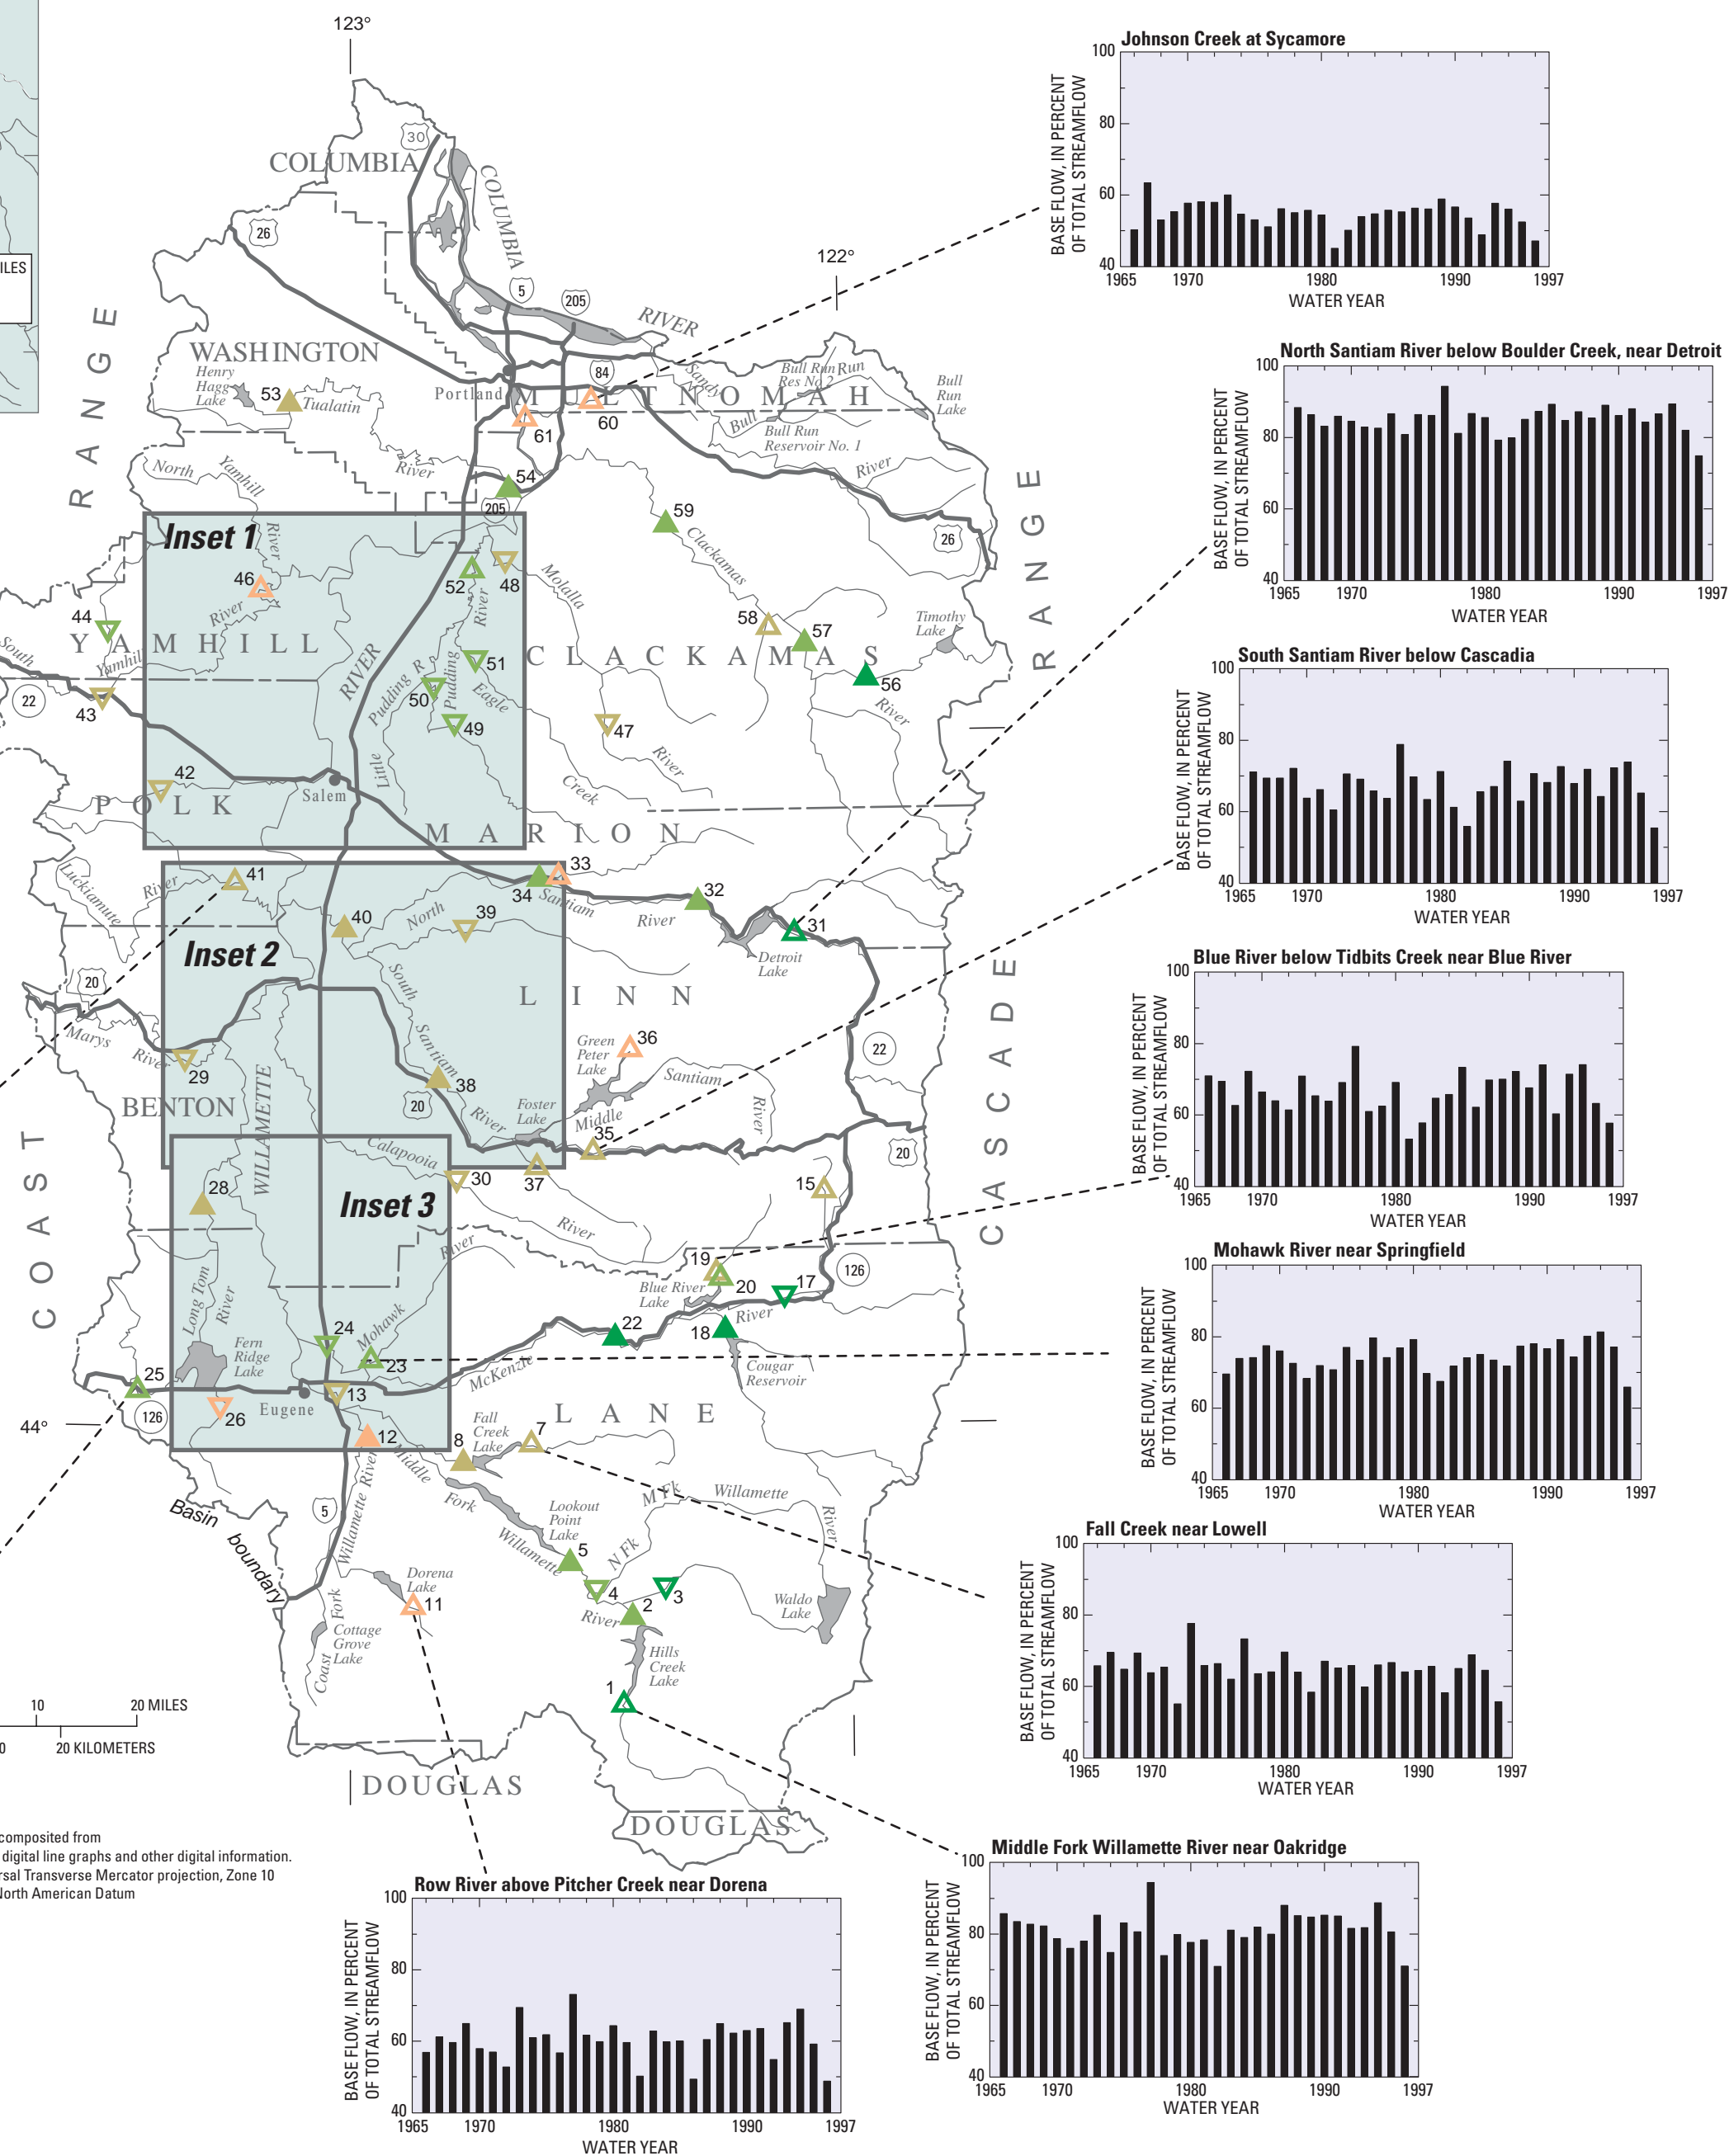


BASE FLOW AS A PERCENTAGE OF TOTAL STREAMFLOW AT SELECTED SITES IN THE WILLAMETTE RIVER BASIN, OREGON, WATER YEARS 1995 AND 1966-96

By
K.K. Lee
2002

U.S. Department of the Interior
U.S. Geological Survey

Estimates of Ground-Water Recharge, Base Flow, and Stream Reach Gains and Losses in the Willamette River Basin, Oregon

Prepared in cooperation with the
OREGON WATER RESOURCES DEPARTMENT

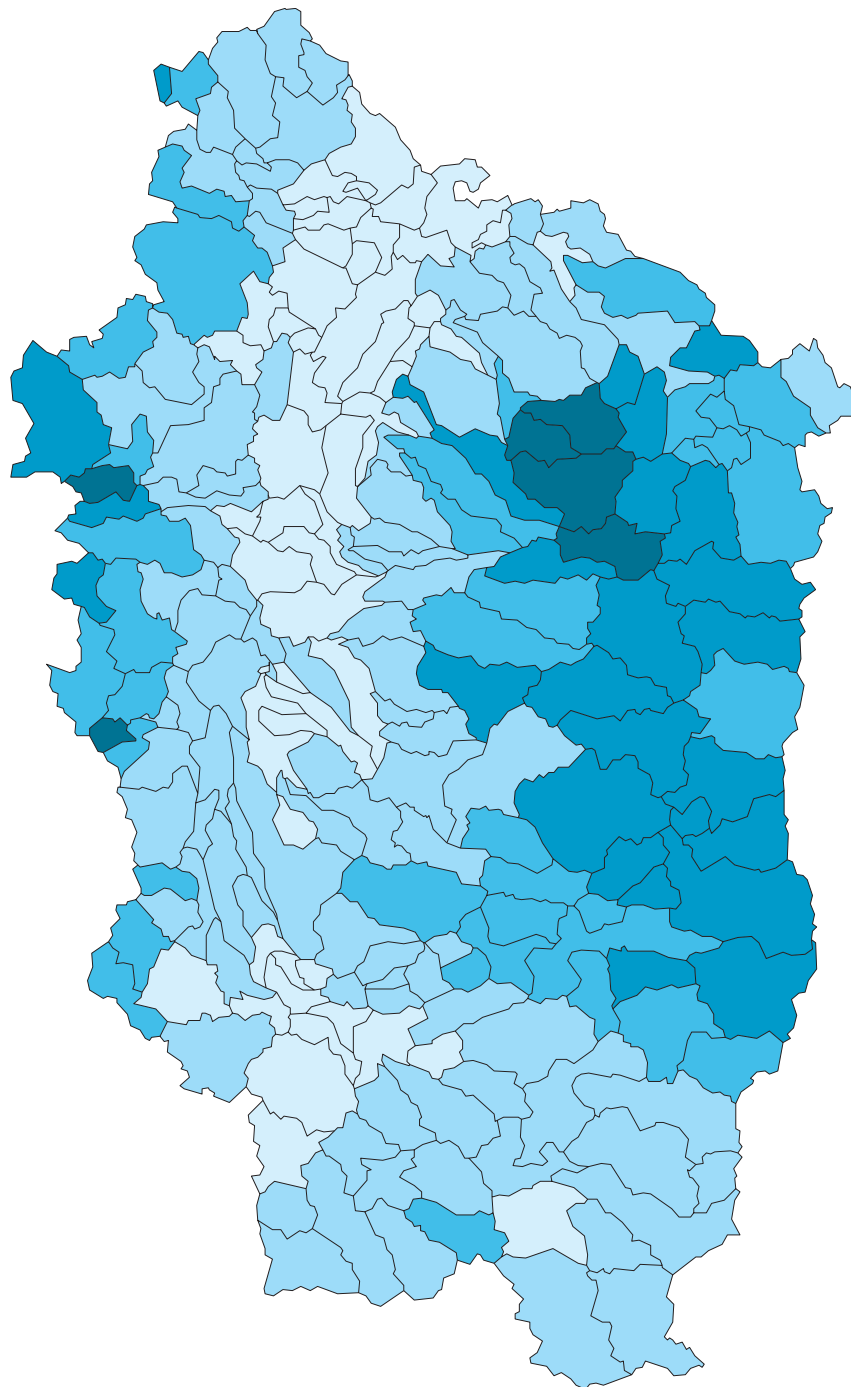

Water-Resources Investigations Report 01-4215